

3.14 Transportation and Traffic

This section describes the transportation network and existing conditions in the project study area, provides a summary of applicable plans and regulations related to implementation and impact analysis of the Proposed Project, as well as the and discussed the potential transportation and traffic impacts of the Proposed Project. Transportation and traffic impacts associated with projected ridership, traffic, pedestrian and bike systems, safety hazards, emergency vehicle access, station parking and access are summarized herein, based on the transportation analysis report prepared for the Proposed Project by Fehr & Peers Transportation Consultants, which is Appendix D of the EIR. Impacts on freight were analyzed based on a characterization of existing conditions and future conditions with and without the Proposed Project.

Project Variant 1 would not change transportation impacts during operations because it would not change normal train service operations and thus it is not discussed below. During construction Project Variant 1 would have less OCS construction and less construction traffic overall. Construction of PS7 would occur near Alma Avenue in San Jose and thus construction traffic would shift from near Kurte Park to near Alma Avenue, but this would not substantially change construction traffic impacts (Mitigation Measure TRA-1a would still apply). Thus, Project Variant 1 would not change the impact analysis described below for the Proposed Project and is not discussed further in this section.

3.14.1 Existing Conditions

3.14.1.1 Regulatory Setting

The Proposed Project falls within the purview of several key state and regional long-range transportation plans, and local general plans. This section describes the regulatory framework of these plans, including the status of implementation. Some of the plans are still in progress and not yet fully adopted.

State and Regional Plans

California Transportation Plan 2025/2030

The *California Transportation Plan (CTP) 2025* was adopted in 2006 and updated in 2007. The CTP, overseen by the California Department of Transportation (Caltrans), serves as a blueprint for California's transportation system defined by goals, policies, and strategies to meet the State's future mobility needs. The goals defined in the plan fall into three categories: social equity, prosperous economy, and quality environment. Each goal is tied to performance measures. In turn, members from regional and metropolitan planning agencies report to Caltrans these performance measures. The CTP 2030 Addendum updated the CTP 2025, to comply with the Safe, Accountable, Flexible, Efficient, Transportation Equity Act – A Legacy for Users (SAFETEA-LU). This federal law authorized transportation funding through 2009 and established new requirements for statewide and metropolitan transportation planning. Caltrans is presently working on an update of the CTP that would extend to 2040.

1 **Plan Bay Area**

2 *Plan Bay Area* is the San Francisco Bay Area's plan to meet the requirements of Senate Bill 375,
3 which was signed into law in 2008. The law requires each of the state's metropolitan planning
4 organizations (MPOs) to develop a Sustainable Communities Strategy (SCS) aimed at reducing
5 greenhouse gas (GHG) emissions from passenger vehicles. *Plan Bay Area* is overseen by the
6 Metropolitan Transportation Commission (MTC) and the Association of Bay Area Governments
7 (ABAG). It serves as the region's SCS and the 2040 Regional Transportation Plan integrating
8 transportation and land-use strategy to manage GHG emissions and plan for future population
9 growth. In July 2013, *Plan Bay Area* was adopted by ABAG and the MTC. The Proposed Project and
10 the San Francisco Downtown Extension (DTX) are two is one of the major projects included in *Plan*
11 *Bay Area*.

12 **California Public Utilities Commission General Orders**

13 As described in Section 3.13, *Public Services and Utilities*, the California Public Utilities Commission
14 (CPUC) has safety and security regulatory authority over all transit agencies in California. ~~The~~
15 ~~CPUC's Rail Transit Safety Section focuses on verification of the system safety and security plans of~~
16 ~~each rail transit agency to ensure these plans meet all state and federal rules and regulations.~~
17 According to the CPUC, an electrified Caltrain system falls under the rules and regulations governed
18 by the Commission's Electric Safety and Reliability Branch (ESRB), Rail Operations and Safety
19 Branch (ROSB) and Rail Crossings Engineering Section (RCES).

20 Rules established by the CPUC are called General Orders (GOs). The following GOs are related to rail
21 transit safety and security (California Public Utilities Commission 2013).

- 22 • **GO 26-D:** Clearances on Railroads and Street Railroads as to Side and Overhead Structures,
23 Parallel Tracks and Crossings. This order is relevant to providing physical clearances around
24 railroad tracks and operations.
- 25 • **GO 72-B:** Construction and Maintenance. This order is relevant to providing standard types of
26 pavement construction at railroad grade crossings.
- 27 • **GO 75-D:** Warning Device Requirements. This order is relevant to providing regulations
28 governing standards for warning devices for at-grade highway-rail crossings.
- 29 • **GO 88-B:** Modification of Railroad Crossings. This order is relevant to providing rules for
30 altering public highway-rail crossings.
- 31 • **GO 95:** Overhead Electric Line Construction. This order is relevant to providing electrical
32 clearances around overhead lines. However, this order does not provide any specific guidance
33 for 25 kVA systems proposed for use for the Proposed Project.
- 34 • **GO 118-A:** Construction, Reconstruction and Maintenance of Walkways, and Control of
35 Vegetation adjacent to Railroad Tracks. This order is relevant to providing safe access and
36 vegetation control.

37 The CPUC initiated new rule-making (13-03-009) in 2013 pursuant to Petition 12-10-011
38 concerning a new GO governing safety standards for the use of 25 kVA electrical lines to power high
39 speed trains. The rules are intended to establish uniform safety requirements governing the design,
40 construction, operation, and maintenance of 25 kVA overhead contact system (OCS), which is to be
41 constructed for the operation of high-speed trains in California. CPUC meetings on this GO has
42 resulted in discussions about the GO being specific to a fully grade-separated dedicated high-speed

1 rail system. The draft GO addresses performance requirements, clearances and protection against
2 electric shock, grounding and bonding, strength requirements, safe working practices, and reporting
3 requirements. Because the OCS for the Proposed Project would be used in the future by both
4 Caltrain and high-speed rail, some of the issues addressed in the draft GO may apply to the Proposed
5 Project OCS. It also appears additional CPUC rule-making proceedings would be needed for the
6 Proposed Project because it would not be a fully grade-separated ~~dedicated~~ shared system. As the
7 draft GO proceeds through rule-making, JPB will coordinate with CPUC concerning the potential
8 applicability of the GO to the Proposed Project and will consider ~~apply~~ any requirements in the
9 adopted order (as well as additional requirements to be determined) during the final design of the
10 Proposed Project.

11 **Local Plans and Regulations**

12 **General Plans and Specific Plans**

13 General plans and specific plans prepared by the local municipalities include specific goals, policies,
14 and actions designed to maintain acceptable roadway traffic operations, reduce vehicle traffic, and
15 maintain acceptable services for transit, pedestrian, and bicycle facilities within the jurisdiction of
16 the municipalities. General plans and specific plans in the project area are discussed in Section 3.10,
17 *Land Use and Recreation*, Appendix D, *Transportation Analysis*, and Appendix H, *Land Use*
18 *Information*.

19 **Station Area and Downtown Plans**

20 A number of downtown and station area plans near Caltrain stations in the project area have been
21 adopted or implemented in the past decade, or are currently in-progress. In general, these plans are
22 overseen by municipalities along the Caltrain corridor. Appendix D details station area and
23 downtown area plans completed since 2005 or currently in-progress. Some station area plans
24 involve both public and private involvement or investment. In addition, some plans are part of the
25 Grand Boulevard Initiative, a multi-jurisdictional, regional planning effort focused on the El Camino
26 Real Corridor from San Francisco to San Jose (Grand Boulevard Initiative 2013). The Grand
27 Boulevard initiative is currently in-progress.

28 **Caltrain Plans and Policies**

29 Caltrain has several plans relevant to this impact analysis which are described below

30 ***Caltrain Comprehensive Access Policy Program Statement***

31 Caltrain adopted its *Comprehensive Access Program Policy Statement* in May 2010. The access
32 guiding principles are as follows (Caltrain 2010):

- 33 ● Increase access capacity to support ridership growth.
- 34 ● Prioritize sustainable (“green”) access.
- 35 ● More effectively manage land and capital assets.
- 36 ● Prioritize cost-effective access modes.
- 37 ● Enhance customer satisfaction.
- 38 ● Solidify partnerships to implement improvements.

1 Based on these guiding principles, the system-wide access mode of transportation priority is as
2 follows: (1) Walk; (2) Transit; (3) Bike; and (4) Auto.

3 While the overall focus of capital investments at the system-wide level support walking, riding
4 transit and bicycling, access mode prioritization at the station level will need to vary. Land uses and
5 densities around the Caltrain stations vary from urban to suburban. Access strategies in an urban
6 station area will differ from that of a suburban station area. Caltrain's access program prioritizes
7 alternative modes of access at Transit Center stations (such as the San Francisco 4th and King
8 Station), Intermodal Connectivity stations (such as the Millbrae Station), and Neighborhood
9 Circulator stations (such as the Menlo Park Station) and auto access at auto-oriented stations (such
10 as the Tamien Station). Transportation investments need to be tied to land use decisions to result in
11 context-sensitive solutions and maximize return on investment.

12 The *Comprehensive Access Program Policy Statement* requires the development of an Access
13 Strategic Plan and a Capital Improvement Plan as the next steps in developing a comprehensive
14 access program. The following are example access strategies by mode. They are the types of capital
15 investments that can be made throughout the Caltrain system to shift ~~our~~ the access mode of
16 transportation away from auto to walk, transit and bike. These strategies are considered in the
17 development of Caltrain's Access Strategic Plan and the Capital Investment Plan, the next key steps
18 in developing the Comprehensive Access Program.

- 19 ● All Modes: real-time information; signage/ wayfinding; lighting; security; universal design
20 (Americans with Disabilities Act (ADA) requirements); pedestrian/bicycle crossing signal
21 priority; demand-based pricing strategies; and inviting public spaces;
- 22 ● Walk: transit-oriented development (TOD); direct circulation; platform circulation management;
23 traffic controls; traffic calming; timed transfers; transit; enhanced service frequency and
24 capacity; platform proximity; and bike routes/lanes/paths.
- 25 ● Bike: on-board accommodations; bike parking and stations; E-lockers; and bike sharing
- 26 ● Auto: reserved parking; shared parking; car sharing; dedicated drop-off spaces (kiss-n-ride,
27 taxis, ADA); and parking fees/permits.

28 ***Caltrain Bicycle Access and Parking Plan***

29 The *Caltrain Bicycle Access and Parking Plan* complements Caltrain's bikes on board program. The
30 *Caltrain Bicycle Access and Parking Plan* (Caltrain 2008) proposes to increase the number of
31 passengers who bicycle to Caltrain stations by making improvements to access bike parking
32 throughout the system. The plan identifies specific improvements at the top 10 stations which
33 account for 75 percent of the system's cyclist-passenger volumes: San Francisco, 22nd Street,
34 Millbrae, Hillsdale, San Mateo, Redwood City, Palo Alto, Mountain View, Sunnyvale and San Jose
35 Diridon. The plan also prescribes system-wide guidelines and best practices for improving bicycle
36 facilities throughout the Caltrain system.

37 Caltrain's strategy is to provide a range of options to accommodate passengers' various needs for
38 the bicycle portion of their Caltrain trip. Plan recommendations include:

- 39 ● Cyclist-specific customer service and marketing.
- 40 ● Cyclist focused safety and security improvements.
- 41 ● Increasing overall bicycle parking supply.

- 1 • Providing a mix of bike parking for different user needs.
- 2 • Improving station access for passengers with bikes.
- 3 • Working with cities to improve station bike access.
- 4 • Studying innovative station-side concepts such as real-time bicycle capacity information, bike
- 5 sharing, and subsidies for folding bikes.

6 The *Caltrain Bicycle Access and Parking Plan* contains Bicycle Parking and Access Guidelines to
7 supplement existing Caltrain Design Criteria and Standards. Plan recommendations are
8 implemented based on the timing of available funding.

9 **3.14.1.2 Environmental Setting**

10 This section presents an assessment of the existing conditions in the study area, and provides a basis
11 for the assessment of future transportation conditions. All data and analysis presented is for the
12 existing conditions in 2013, unless specified otherwise.

13 **Study Area**

14 Caltrain provides inter- and intra-county commuter rail service to the San Francisco Bay Area
15 between San Francisco and Gilroy. The entire Caltrain corridor is divided into six fare zones. The 51-
16 mile project corridor, bounded by the 4th and King Station in San Francisco and the Tamien Station
17 in San Jose, has 24 weekday stations (27 total stations including Broadway in Burlingame, Atherton,
18 and Stanford) across four fare zones (each zone is about 13 miles in length) along the Caltrain right-
19 of-way (ROW). The Caltrain corridor continues south of the Proposed Project area to Gilroy,
20 including two additional fare zones and five additional stations providing limited peak period, peak
21 direction service. Table 3.14-1 displays Caltrain stations within the Proposed Project boundary and
22 the jurisdictions in which these stations are located. Figure 3.14-1 displays the study area
23 geographic boundaries, stations, and zone boundaries.

24 The study area for transportation and traffic analysis considers roadway, transit, bicycle, and
25 pedestrian facilities that would be affected by Proposed Project operation. These facilities consist of
26 Caltrain stations within the project boundary, regional transit systems that provide connecting
27 service to Caltrain stations, freeways and arterial roads that runs parallel or perpendicular to the
28 project corridor, and intersections and local roadways in the vicinity of Caltrain stations and at-
29 grade crossings.

30 **Existing Transit Conditions**

31 This section summarizes the existing Caltrain transit system and other regional and local transit
32 systems that connect to Caltrain stations.

33 **Caltrain Service and Schedule**

34 The JPB operates Caltrain 365 days a year with reduced schedules on major U.S. holidays. The
35 current Caltrain operating schedule consists of 92 trains each weekday, 36 trains on Saturdays, and
36 32 trains on Sundays. On weekdays, three of these trains start in Gilroy during the morning
37 commute period, and three terminate in Gilroy during the evening commute period. On Saturdays
38 and Sundays, trains run between San Jose (Diridon) and San Francisco only.

1 **Table 3.14-1. Caltrain Stations and Jurisdictions in Study Area**

County	City	Caltrain Stations ^a
San Francisco	San Francisco	<u>4th and King</u> <u>22nd Street</u> Bayshore
	<u>Brisbane</u>	<u>Bayshore</u>
San Mateo	South San Francisco	South San Francisco
	San Bruno	San Bruno
	Millbrae	<u>Millbrae</u>
	Burlingame	Broadway ^b Burlingame
	San Mateo	<u>San Mateo</u> Hayward Park <u>Hillsdale</u>
	Belmont	Belmont
	San Carlos	San Carlos
	Redwood City	<u>Redwood City</u>
	Atherton	Atherton ^b
	Menlo Park	<u>Menlo Park</u> ^c
Santa Clara	Palo Alto	<u>Palo Alto</u> Stanford ^d California Avenue
	Mountain View	San Antonio <u>Mountain View</u>
	Sunnyvale	<u>Sunnyvale</u> Lawrence
	Santa Clara	Santa Clara
	San Jose	College Park <u>San Jose Diridon</u> <u>Tamien</u>

Source: Appendix D, *Transportation Analysis*

^a Stations with Baby Bullet service are displayed in **bold**.


^b There is no current weekday service to Broadway or Atherton Stations at present, only weekend service. Weekday service would be restored to these stations with the Proposed Project.

^c Baby Bullet service is provided in the ~~reverse~~ commute direction only.

^d The Stanford Station is only used for special events, such as Stanford football games.

2

3 Weekday trains are a mix of Baby Bullets, Limited, and Local trains. Weekend service is a mix of
 4 weekend Baby Bullets and Local trains, with two Baby Bullet trains in each direction per day. Baby
 5 Bullet express service trains make the trip between San Francisco and San Jose in less than 1-hour.
 6 Table 3.14-2 shows the stations with Baby Bullet service in the study area. Local trains are operated
 7 at the shoulders of peak periods and serve to transition the service from peak to off-peak. Local
 8 trains stop at almost all stations between the San Jose Diridon Station and the San Francisco 4th and
 9 King Station, resulting in the longest travel times of all service types. Limited-stop trains operate as
 10 skip-stop for one-half of the route and as local trains for the other half, resulting in slightly faster
 11 travel times than Local trains.

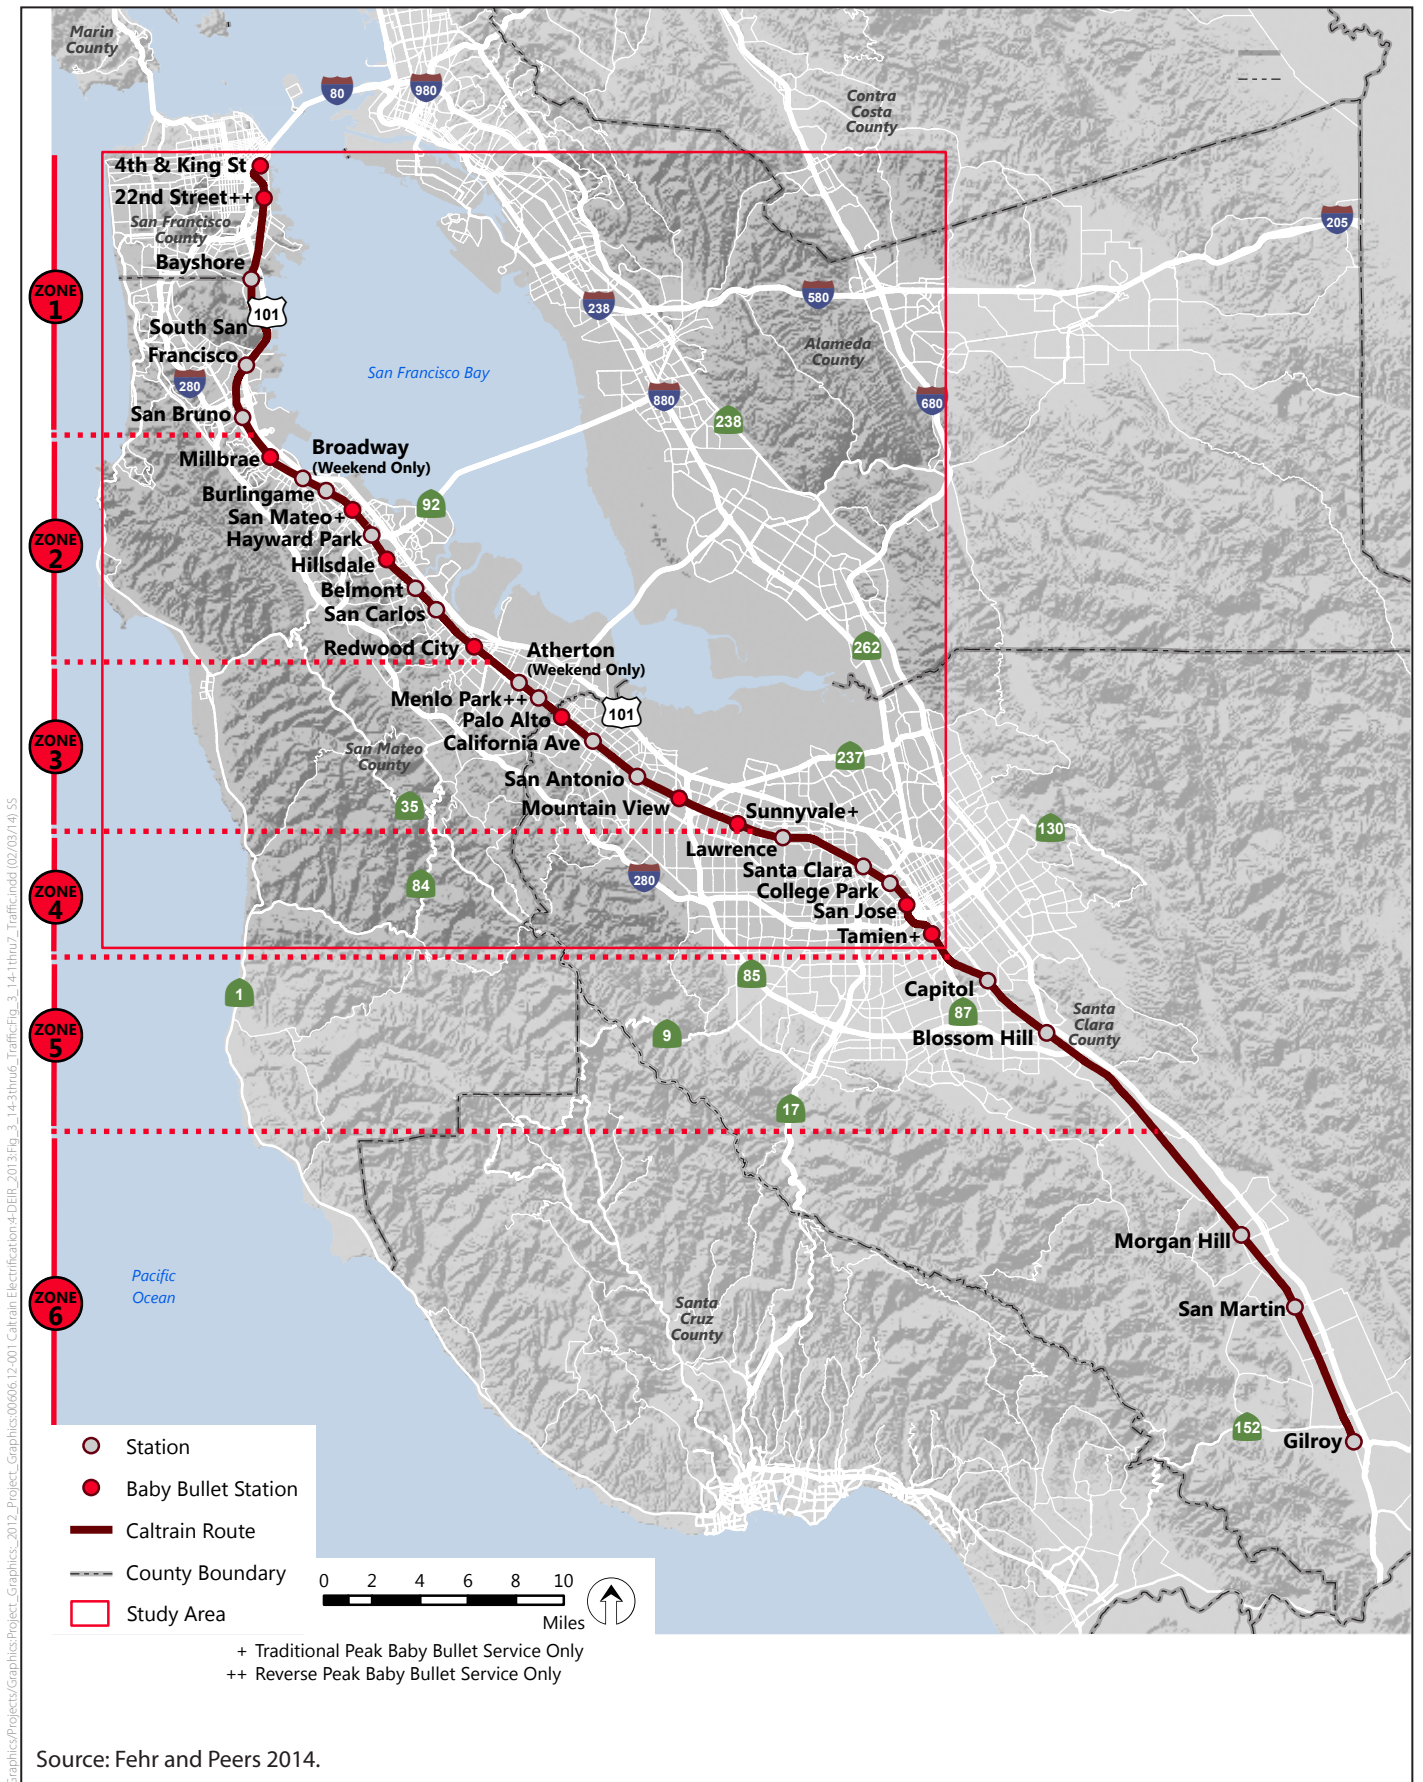

Source: Fehr and Peers 2014.

Figure 3.14-1
Project Study Area
 Peninsula Corridor Electrification Project

1 Scheduled headways¹ vary by time of day, station, and service type. During the AM and PM peak
 2 periods, all bullet stations are served by at least one Baby Bullet train per hour with headways
 3 ranging between 15 to ~~60~~ 30 minutes. The higher frequency bullet stations, including San Francisco
 4 4th and King, Palo Alto, and San Jose Diridon, run at least two Baby Bullet trains per hour. Non-
 5 bullet stations operate Limited and Local trains at headways ranging from 30 minutes to 60 minutes
 6 during peak periods. During off-peak periods (early morning, midday, and after 7:00 p.m.),
 7 headways at all stations are generally about 60 minutes.

8 **Caltrain Travel Time**

9 Table 3.14-2 displays average travel times by service type and direction in the study area. Travel
 10 times for northbound and southbound directions are calculated between the Tamien or San Jose
 11 Diridon Station and the San Francisco 4th & King Station. Because Baby Bullet trains and Limited
 12 trains only stop at select stations, travel times on these trains are shorter than Local train travel
 13 times. Compared with Local trains, a passenger on a Baby Bullet can cut his/her travel time by about
 14 one-third.

15 **Table 3.14-2. Average Caltrain Travel Time Between San Francisco and San Jose (2013)**

Service Type	Average Travel Time in Minutes	
	Northbound	Southbound
Local	92	92
Limited	84	82
Baby Bullet	60	63

Source: Appendix D, *Transportation Analysis*

16
 17 When making travel choices, passengers often weigh factors such as the time- and cost-
 18 competitiveness of the modes available to them. Overall, Caltrain is faster than automobile for most
 19 southbound trips. For northbound trips, travel by automobile can be faster than Caltrain depending
 20 on specific origins and destinations. However, travel times may vary by origin-destination station
 21 pair and route. In addition, travel times by automobile are highly variable because of traffic
 22 conditions affected by weather, accidents and collisions, time of day, travel direction, and season.

23 **Caltrain Ridership and Travel Patterns**

24 Caltrain has experienced steady ridership growth since 2005. From 2012 to 2013, ridership
 25 increased by about 11 percent, which was in-step with job growth, as the region continued to
 26 recover from the great recession. In 2013, Caltrain carried approximately 47,000 passengers on a
 27 typical weekday. Table 3.14-3 displays the top ten stations with the highest number of average
 28 weekday ridership (AWR). The number of daily boardings at the San Francisco 4th and King Station
 29 is almost twice the number of daily boardings at the Palo Alto Station.

30 It should be noted that this EIR uses daily boardings as the measurement of ridership. A daily
 31 boarding is one individual using the train for a trip and is reported at the origin boarding station. A
 32 different convention for reporting station ridership is to use boardings and alightings (alightings are
 33 when one gets off the train at the end of the trip). Each trip includes one boarding (at the origin
 34 station) and one alighting (at the destination). The number of boardings plus alightings overall is

¹ The time between arrivals of trains moving in the same direction at a station.

1 double the number of boardings overall. Nominally, as most riders complete round trips on Caltrain,
 2 the amount of boardings and alightings at a station is double the amount of boardings.

3 **Table 3.14-3. Top Ten Stations for Average Weekday Ridership (2013)**

Station	Total Average Weekday Ridership
4th and King	10,786
Palo Alto	5,469
Mountain View	3,876
San Jose Diridon	3,489
Millbrae	3,255
Redwood City	2,619
Hillsdale	2,317
Sunnyvale	2,274
San Mateo	1,571
Menlo Park	1,526

Sources: Caltrain 2013b; Appendix D, *Transportation Analysis*.


4
 5 Weekday travel along the Caltrain corridor is characterized by interregional trips that primarily
 6 occur during the AM and PM peak periods. Weekday boardings between 6:30 and 10:30 a.m.
 7 constitute the AM peak period and PM trips between 4:00 and 8:00 p.m. constitute the PM peak
 8 period. The proportion of AM and PM passengers at each station varies. In the AM peak, the
 9 northbound ridership is larger than the southbound ridership. Off-peak midday ridership is more
 10 than twice as large as the off-peak evening ridership. However, neither off-peak ridership is close to
 11 the combined passenger volume traveling north and south in the study area during the AM and PM
 12 peak periods. Figure 3.14-2 displays the average weekday ridership by time of day by station.

13 The trip purpose of the majority of weekday Caltrain passengers is commuting, or travel for work,
 14 which is about 74 percent of the AWR, followed by the social/recreational trips (14 percent), school
 15 trips (8 percent), shopping/personal trips (3 percent), and airport trips (1 percent). The main trip
 16 purposes of Caltrain passengers are displayed in Figure 3.14-3.

17 Caltrain passengers use a range of modes to travel from their origin location to their origin station at
 18 the beginning of their trip. Morning and evening access modes vary depending on the activities and
 19 errands a passenger may engage in after alighting at a Caltrain station. In general, most trips in the
 20 morning are between a person’s place of residence and work. In the evening, this pattern reverses,
 21 but a passenger may not travel directly home from a station. Instead, they may engage in “trip
 22 chaining” or a series of trips before reaching home, their final destination (McGuckin & Murakami
 23 1999). This can also occur in the morning, especially if a person has younger children and must drop
 24 them off at school or daycare on the way to a Caltrain station. Trip chaining, in turn, can influence a
 25 passenger’s travel mode choice.

26 Travel mode share data was derived from the 2013 Caltrain Station Intercept Survey, conducted in
 27 June 2013 at 23 Caltrain stations during the weekday morning commute period (6:30 a.m. to 10:30
 28 a.m.). Although the survey was conducted in the morning, the interviewers asked passengers
 29 questions about each passenger’s return trip, which typically occurs during PM peak periods. Based
 30 on the survey at the Caltrain stations, the overall daily modes of access to Caltrain stations are
 31 estimated and shown in Figure 3.14-4.

Graphics/Project/Graphic/Project_Graphics_2012_Project_Graphics/00606_12-001/Caltrain Electrification/4/DEIB_2013/Fig_3_14-3/brnd_Traffic/Fig_3_14-1/brnd_Traffic.mxd (02/03/14)_55

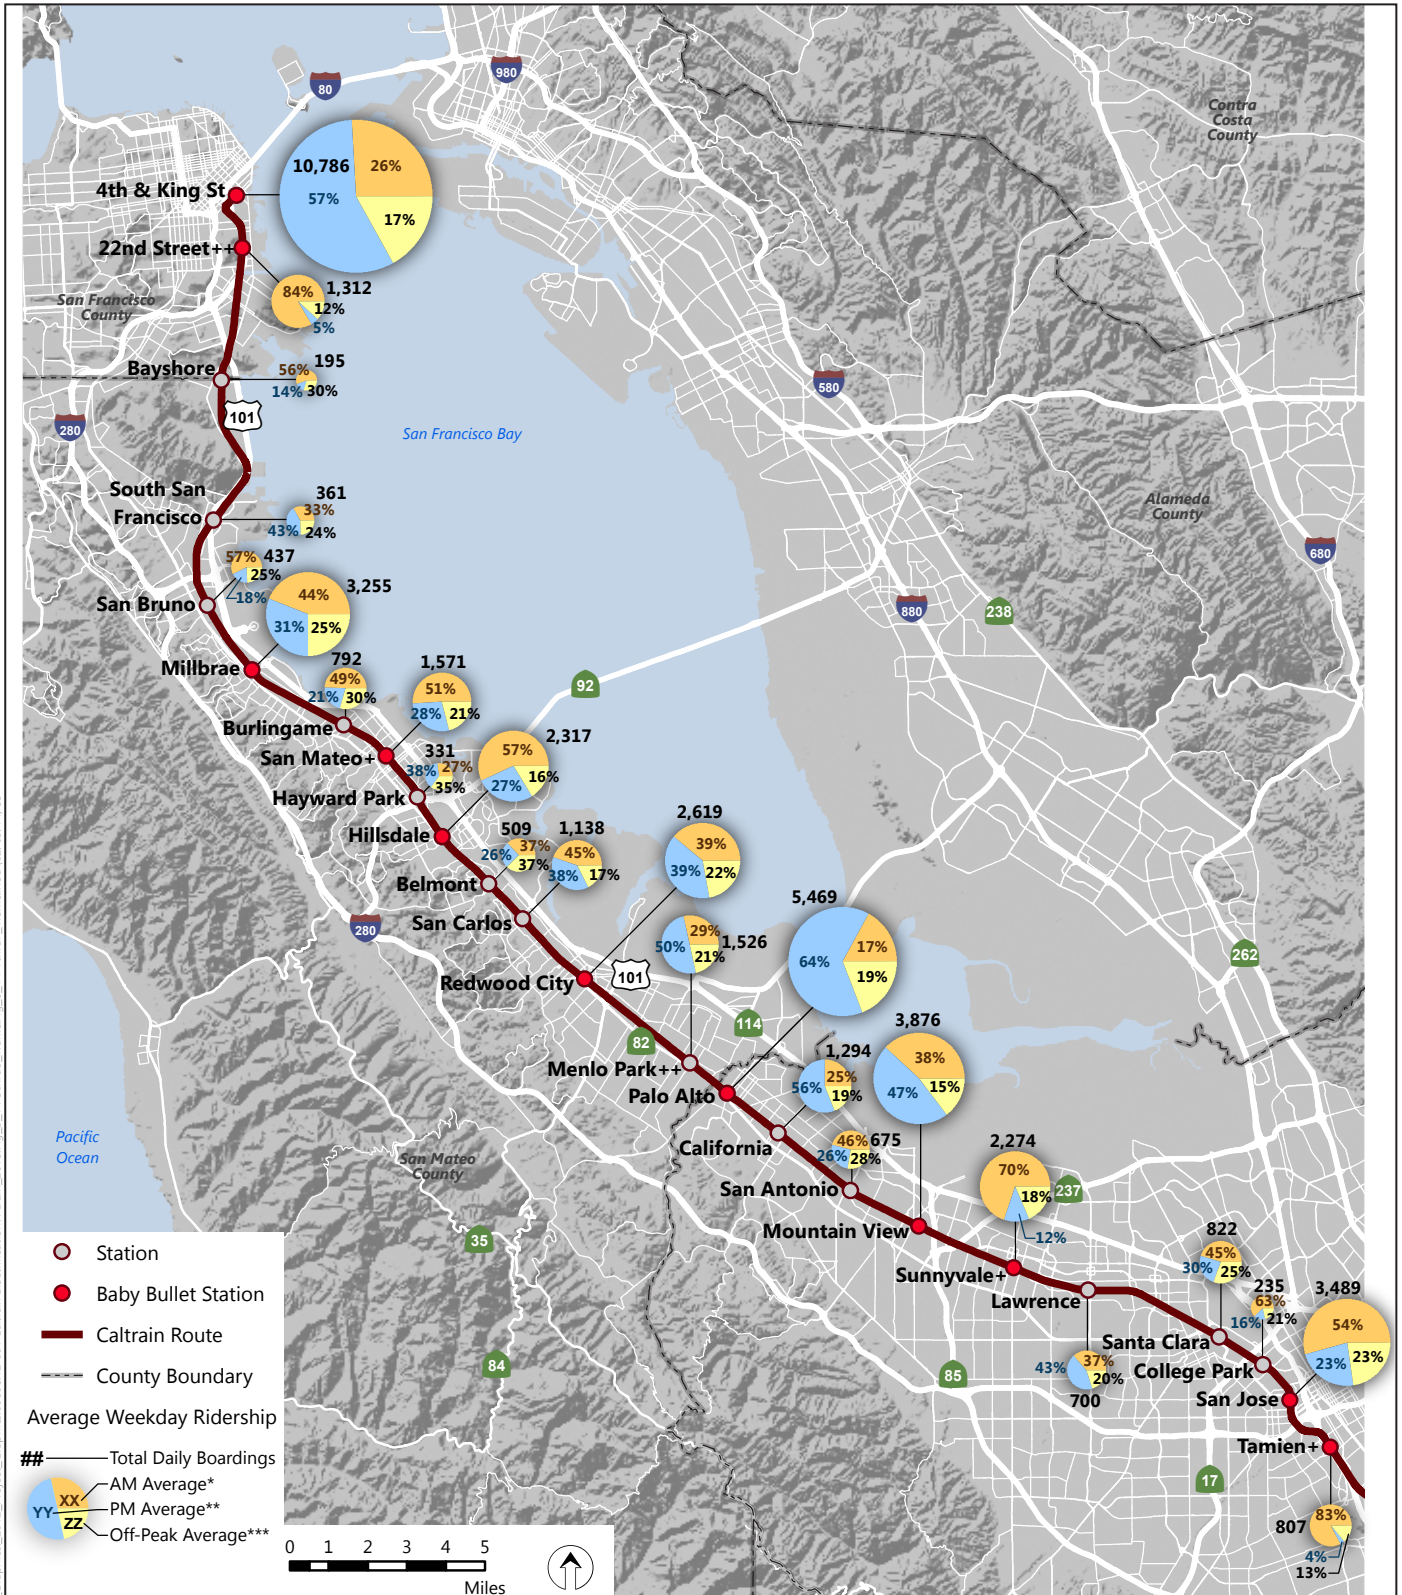


+ Traditional Peak Baby Bullet Service Only
 ++ Reverse Peak Baby Bullet Service Only
 * AM peak period boardings occur between 6:30 AM to 10:30 AM
 ** PM peak period boardings occur between 4:00 PM to 8:00 PM
 *** Off-peak boardings occur between 5:00 AM to 6:29 AM, 10:30 AM to 3:59 PM, and 8:01 PM to 1:32 AM

Source: Fehr and Peers 2014.


Figure 3.14-2
Average Weekday Ridership by Station (2013)
 Peninsula Corridor Electrification Project

Graphics/Projects/Graphic/Project_Graphics_2012_Project_Graphics/00606_12-001/Caltrain Electrification/4/DEIR_2013/Fig_3_14-3/tnr6_Traffic/Fig_3_14-1/tnr7_Traffic/mtd_02/03/14/35

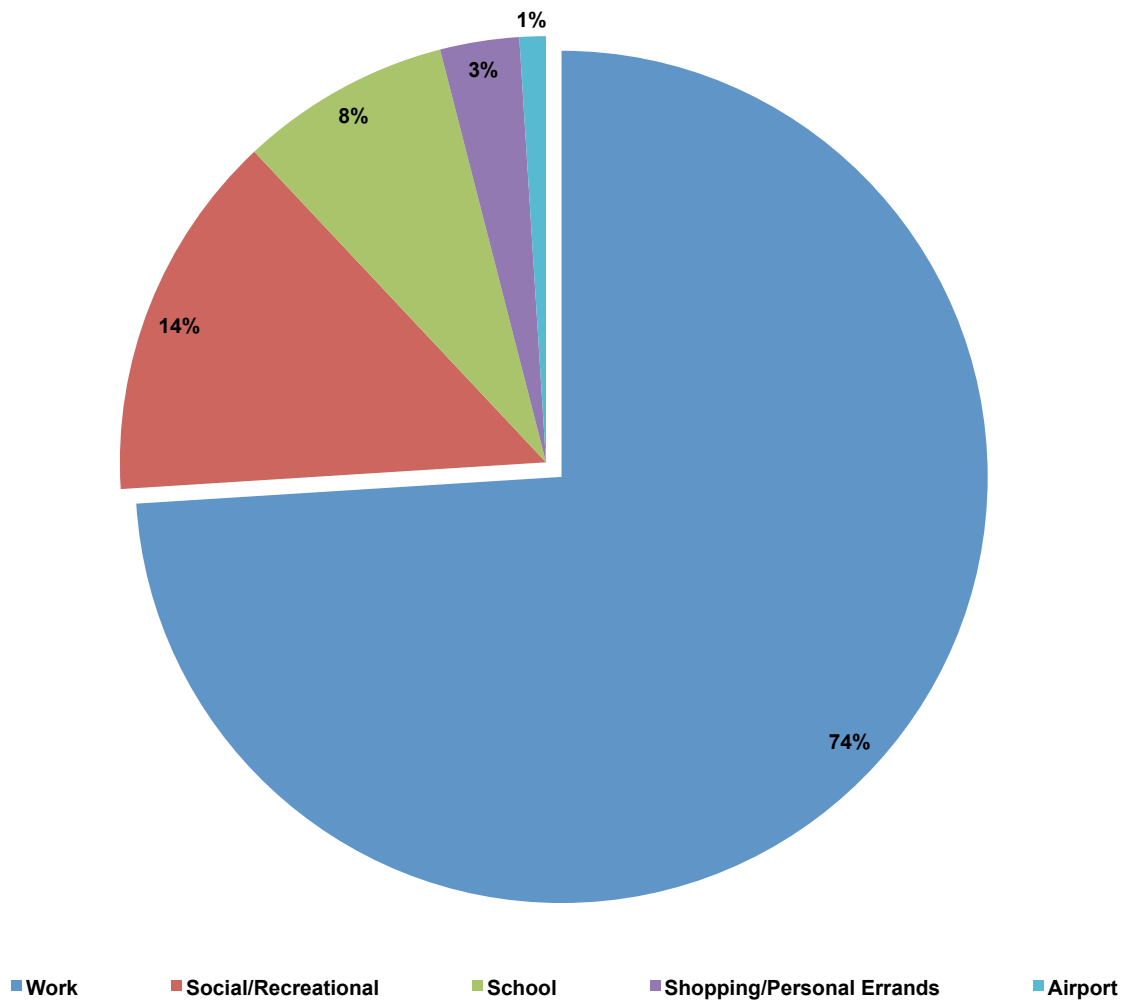

Source: Fehr & Peers 2014

Figure 3.14-3
Trip Purposes of Caltrain Passengers (2010)
Peninsula Corridor Electrification Project

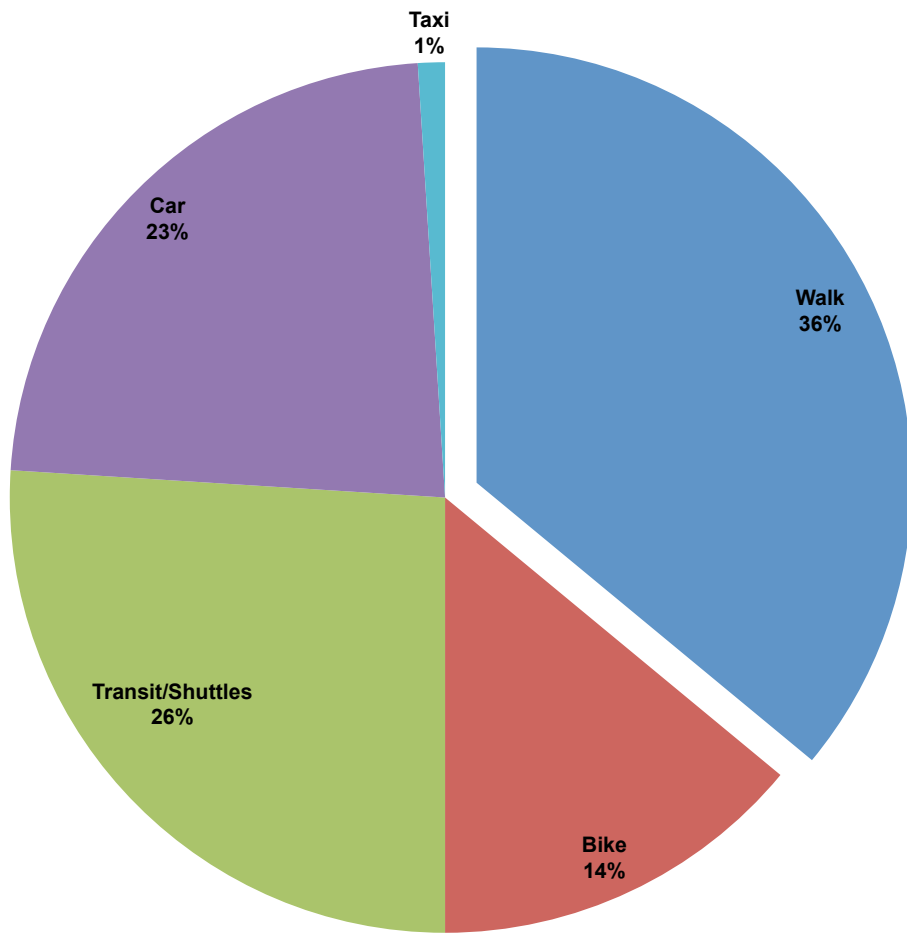

Source: Fehr & Peers 2014

Figure 3.14-4
Daily Mode of Access to Caltrain Stations (2013)
Peninsula Corridor Electrification Project

1 The top daily access mode for Caltrain passengers traveling to stations is walking (36 percent). The
2 high mode share for walking indicates that a high volume of passengers live or work within
3 reasonable walking distance of their origin station. Travel by transit or public/private shuttle is the
4 second most popular access mode (26 percent) followed by car (23 percent) and bicycle (14
5 percent). The car mode includes passengers who drove alone, passengers who were dropped off at
6 the station or carpooled, and motorcycle and scooter riders. Of the 23 percent of passengers who
7 accessed Caltrain by car, about 13 percent of passengers drove alone, 8 percent of passengers were
8 dropped off, and 1 percent of passengers carpooled. The majority of Caltrain cyclists bring their
9 bicycles on-board rather than parking their bicycle at their origin station. About 13 percent of
10 passengers bring their bicycles on-board compared with only 1 percent who store their bicycles in
11 lockers, racks, or shared bicycle storage at or near stations.

12 Figure 3.14-5 displays the modes of access for AM and PM peak passengers by stations. The top
13 mode of access for Caltrain passengers traveling to stations in the AM peak period is driving alone
14 (26 percent). In contrast, the top access mode for PM passengers is walking (48 percent). Walking is
15 the second most popular mode for AM passengers. Driving is generally more popular in the morning,
16 than the evening, with driving alone, kiss-and-ride, and carpooling. Kiss-and-ride is generally
17 describes passengers who are dropped off at a station by car. Passengers who drove alone or
18 carpooled, also referred to as park-and-ride, generally park their car at or near the station. Bicycle
19 usage, both parked and on-board, is even for both time periods.

20 The travel mode of egress a passenger uses on the destination side of their trip can differ from the
21 mode of access they used at the start of their trip. Mode of egress is the mode a passenger makes use
22 of at their destination station to reach their final destination point, such as a place of work or a
23 shopping center. On average, walking is the most common mode of egress across all stations.
24 Overall, park-and-ride and kiss-and-ride are not as common as other modes of egress.

25 **Regional Transit System**

26 The greater San Francisco Bay Area is served by an extensive public transit network of rail, buses,
27 and ferries. In general, Caltrain is well connected with the regional transit network, offering public
28 transit connecting service to other service providers or public and private shuttles at all stations
29 within the study area. Table 3.14-4 summarizes the service area of all transit systems that currently
30 connect to a Caltrain station within the project area. Figures in Appendix D show all bus and rail
31 systems connected to Caltrain in the project area.

32 Caltrain system is connected to the following bus transit systems:


- 33 ● **San Mateo County Transit District (SamTrans):** SamTrans operates 73 bus routes and
34 paratransit service throughout San Mateo County and parts of San Francisco and Palo Alto.
35 SamTrans buses, including the KX Express and Route ECR along El Camino Real between Palo
36 Alto and Daly City connect to a number of Caltrain stations throughout the project area.
- 37 ● **MUNI:** MUNI is operated by the San Francisco Municipal Transportation Agency (SFMTA), which
38 oversees all light rail and bus service, bicycle and pedestrian program, taxis, parking, and traffic
39 control operations in the City and County of San Francisco. The MUNI bus system consists of
40 approximately 65 local and express routes. A number of MUNI ~~Metro light rail~~ and bus routes
41 connects to the 4th and King, 22nd Street, and Bayshore Caltrain Stations.

42

1 **Table 3.14-4. Weekday Transit Connections by Stations (2013)**

Station	Station Address	Transit Connections (Provider, Route)
4th & King	700 4th Street, San Francisco, CA 94107	MUNI Bus: 10, 30, 45, 47, 80X, 81X, 83X, 91 owl, T owl, N owl MUNI Metro Light Rail : N-Judah, T-Third Public Shuttles: Amtrak Shuttle
22nd Street	1149 22 nd Street, San Francisco, CA 94107	MUNI Bus: 10, 22, 48 MUNI Metro Light Rail : T-Third
Bayshore	400 Tunnel Avenue, San Francisco-Brisbane, CA 94134	MUNI Bus: 8X, 8AX, 8BX, 9, 56 MUNI Metro Light Rail : T-Third SamTrans: 292 Public Shuttles: Bayshore/Brisbane Senior shuttle, Bayshore/Brisbane Commuter Shuttle
South San Francisco	590 Dubuque Avenue, South San Francisco, CA 94080	SamTrans: All services are separated by bridges, etc. from Caltrain station Public Shuttles: Oyster Point, Utah-Grand
San Bruno	297 Huntington Avenue, San Bruno, CA 94066	SamTrans: not close and El Camino Real (where buses run) is 0.25 mile away Public Shuttles: Bayhill San Bruno Shuttle
Millbrae Transit Center	100 California Drive, Millbrae 94030	SamTrans: 397 BART: Richmond Line, Pittsburg/Bay Point (includes connection San Francisco International Airport) Public Shuttles: Broadway/Millbrae, Burlingame Bayside Area, North Burlingame, North Foster City, Sierra Point
Burlingame	290 California Drive, Burlingame, CA 94010	SamTrans: 46, 292 Public Shuttle: Burlingame Trolley
San Mateo	385 First Avenue, San Mateo, CA 94401	SamTrans: 250, 292, 295, 59
Hayward Park	401 Concar Drive, San Mateo, CA 94402	SamTrans: 53, 292, 397 (but not close to station) Public Shuttles: Norfolk
Hillsdale	3333 El Camino Real, San Mateo, CA 94403	SamTrans: ECR, KX, 57, 250, 251, 262, 292, 294, 295, 397, AC Transit: M Public Shuttles: Belmont-Hillsdale, Campus Drive, Lincoln Centre, Mariners Island/PCA, Oracle, Foster City Connections
Belmont	995 El Camino Real, Belmont, CA 94402	SamTrans: ECR, KX, 67, 260, 261, 262, 397, 398 Public Shuttles: Belmont-Hillsdale
San Carlos	599 El Camino Real, San Carlos, CA 94070	SamTrans: ECR, KX, FLXS, 260, 261, 295, 397, 398 Public Shuttles: Electronic Arts, Oracle, Redwood Shores (Bridge Park), Redwood Shores (Clipper)
Redwood City	1 James Avenue, Redwood City, CA 94063	SamTrans: ECR, KX, 270, 274, 275, 276, 278, 296, 297, 397, 398 Public Shuttles: Pacific Shores
Menlo Park	1120 Merrill Street, Menlo Park, CA 94025	SamTrans: ECR, 85, 286, 296 Public Shuttles: Marsh Road, Willow Road
Palo Alto	95 University Avenue, Palo Alto, CA 94301	SamTrans: ECR, 280, 281, 297, 397 VTA Bus: 22, 35, 522 AC Transit: U, Dumbarton Express Public Shuttles: Deer Creek, Stanford Marguerite, Crosstown/Embarcadero, East Palo Alto Community

Graphics/Projects/Graphic/Project_Graphics_2012_Project_Graphics_00606_12-001/California Electrification/4/DEIB_2013/Fig_3_14-3/brn6_Traffic/Fig_3_14-1/brn7_Traffic/mdd_02/03/14).SS

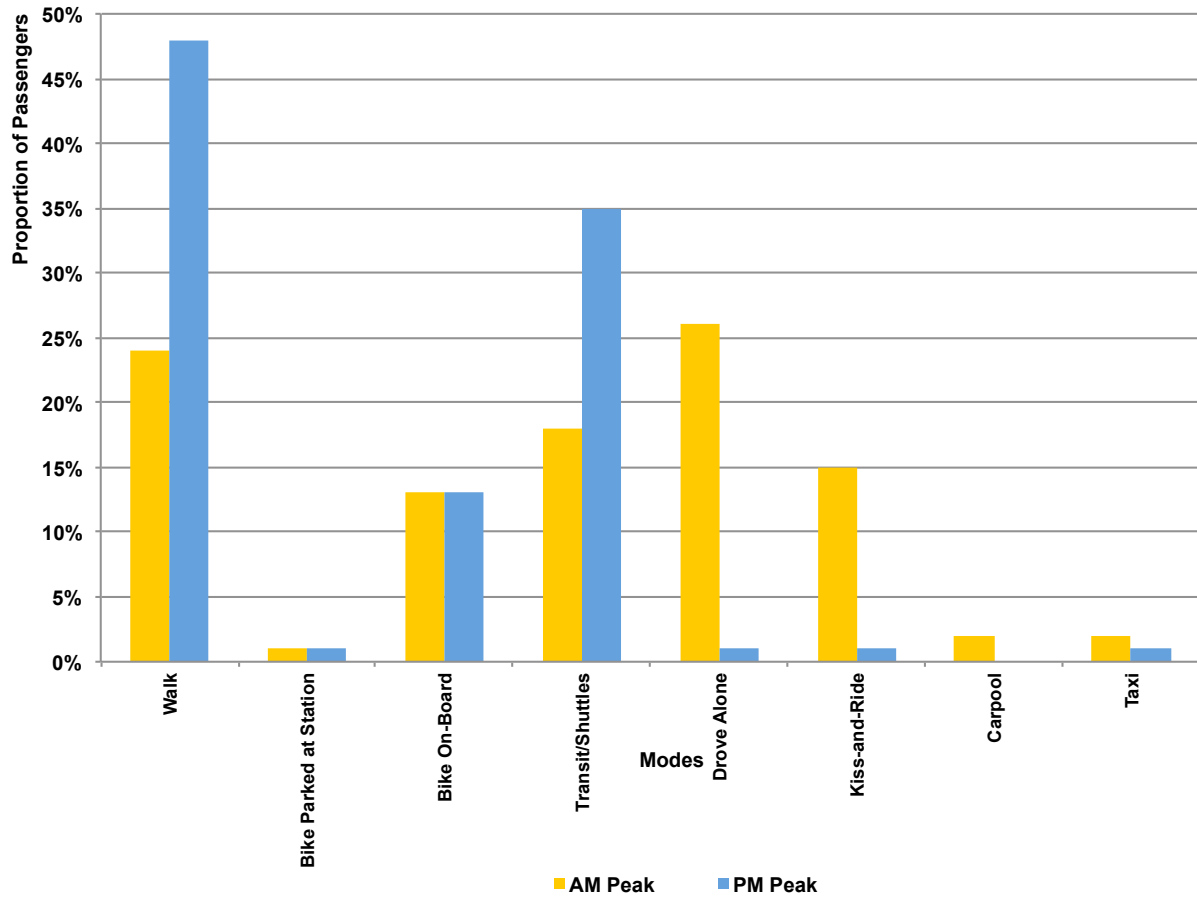

Source: Fehr & Peers 2014

Figure 3.14-5
AM and PM Peak Mode of Access by Stations (2013)
Peninsula Corridor Electrification Project

Station	Station Address	Transit Connections (Provider, Route)
California Avenue	780 Stockton Avenue, San Jose, CA 95126	VTA Bus: 22, 89, 522 AC Transit: Dumbarton Express Public Shuttles: Deer Creek, Stanford Marguerite
San Antonio	190 Showers Drive, Mountain View, CA 94040	VTA Bus: 32, 34, 35, 40 Public Shuttles: Deer Creek, Stanford Marguerite
Mountain View	600 W. Evelyn Avenue, Mountain View, CA 94041	VTA Bus: 34, 35, 51, 52, 902 VTA Light Rail: Mountain View–Winchester Public Shuttles: Duane Avenue, Mary/Moffett, North Bayshore, Shoreline
Sunnyvale	121 W. Evelyn Avenue, Sunnyvale, CA 94086	VTA Bus: 32, 53, 54, 55, 304
Lawrence	137 San Zeno Way, Sunnyvale, CA 94086	Public Shuttles: Bowers–Walsh, Duane Avenue, Mission
Santa Clara	1001 Railroad Avenue, Santa Clara, CA 95050	VTA Bus: 10, Airport Flyer, 22, 32, 60, 81, 522 ACE
College Park	780 Stockton Avenue, San Jose, CA 95126	VTA Bus: 22, 61, 62, 522
San Jose Diridon	65 Cahill Street, San Jose, CA 95110	ACE Amtrak: Coast Starlight Capital Corridor VTA Bus: 22, 63, 64, 65, 68, 81, 180, 181, 522 VTA Light Rail: Mountain View–Winchester Santa Cruz METRO: Highway 17 Express MST: 55 Public Shuttles: DASH (Downtown Area Shuttle)
Tamien	1355 Lick Avenue, San Jose, CA 95110	VTA Bus: 25, 82 VTA Light Rail: Ohlone/Chynoweth–Almaden, Alum Rock–Santa Theresa

Source: Appendix D, *Transportation Analysis*

- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
 - 8
 - 9
 - 10
 - 11
 - 12
 - 13
 - 14
 - 15
- **Santa Clara Valley Transportation Authority (VTA):** VTA provides light rail, bus, and paratransit service to the municipalities in Santa Clara County. In addition, VTA is the congestion management agency for Santa Clara County, responsible for countywide transportation planning and funding and for managing the county’s congestion reduction and air quality improvement. A number of VTA bus routes, including express routes, connect to Caltrain stations within Santa Clara County.
 - **Alameda-Contra Costa (AC) Transit:** AC Transit provides bus and paratransit services to 13 cities and adjacent unincorporated areas in Alameda and Contra Costa Counties. AC Transit operates 116 bus lines, including rapid services and transbay lines that traverse the San Francisco-Oakland Bay Bridge. AC Transit connects to Caltrain via the “M” bus line at the Hillsdale Station, the “U” line at the Palo Alto Station, and the Dumbarton Express at the Palo Alto and California Avenue Stations.
 - **Santa Cruz Metropolitan Transit District (Santa Cruz METRO):** The Santa Cruz METRO operates about 30 bus routes year-round to Santa Cruz County. Caltrain passengers can travel to

1 Santa Cruz via the Highway 17 Express route from the San Jose Diridon Station. In addition to
2 stopping in downtown Santa Cruz, the route also stops in Scotts Valley and Soquel.

- 3 ● **Monterey-Salinas Transit (MST):** MST operates 59 bus routes in Monterey and southern Santa
4 Cruz Counties. MST bus routes 55 and 79 connect to Caltrain at the San Jose Diridon Station.
- 5 ● **Public and Private Shuttle Connections:** Shuttles connecting to Caltrain stations include
6 transportation services that are publically or privately provided by transit agencies, community
7 organizations, employers, and academic and cultural organizations. Most public shuttles operate
8 fixed routes between Caltrain stations and employment sites. Private employer-provided
9 regional shuttles provide direct service to employment sites from either residential
10 neighborhood stops or from major transit hubs, including Caltrain stations. Currently, the Palo
11 Alto Station experiences the highest frequency of public and private shuttles with about 75
12 shuttles each morning, followed by the Millbrae Station (51 shuttles), and the Mountain View
13 Station (37 shuttles).

14 Caltrain is also connected to the following rail transit systems:

- 15 ● **San Francisco Bay Area Rapid Transit (BART):** BART provides rail transit service to the cities
16 in the northern portion of the San Francisco Peninsula, Oakland, Berkeley, Fremont, Walnut
17 Creek, Dublin, Pleasanton, and other cities in the East Bay. Of the five BART lines, Caltrain
18 connects directly to two at the Millbrae Station: the Richmond line and the Pittsburg/Bay Point
19 line. The Pittsburg/Bay Point line includes a connection to San Francisco International Airport.
20 BART passengers can also connect to the San Francisco 4th and King Station via MUNI Metro
21 light rail and bus service.
- 22 ● **MUNI Metro Light Rail:** The MUNI Metro light rail system is a mixture of above- and below-
23 ground service consisting of nine routes serving residential areas and the financial district in
24 San Francisco. A number of MUNI Metro light rail and bus routes connects to the San Francisco
25 4th and King, 22nd Street, and Bayshore Stations.
- 26 ● **Altamont Commuter Express (ACE) Commuter Rail:** ACE provides passenger rail service
27 across the Altamont corridor, spanning San Jose to Stockton. ACE trains connect to Caltrain at
28 the Santa Clara and San Jose Diridon Stations.
- 29 ● **VTA Light Rail:** Of VTA's three light rail lines, two connect to Caltrain stations: The Mountain
30 View-Winchester line at the Mountain View and San Jose Diridon Stations, and
31 Ohlone/Chynoweth-Almaden line at the Tamien Station.
- 32 ● **Amtrak:** In the San Francisco Bay Area, one Amtrak rail route (Coast Starlight) connects to
33 Caltrain at the San Jose Diridon Station. The Coast Starlight connects the San Francisco Bay Area
34 to Seattle and Los Angeles. In addition, Amtrak Thruway bus service at the San Francisco 4th
35 and King Station connects Caltrain passengers to the closest Amtrak stations in Oakland and
36 Emeryville.
- 37 ● **Capital Corridor:** The Capital Corridor provides intercity passenger rail service to Sacramento,
38 Oakland, and San Jose. Amtrak Thruway bus provides connections to nearby cities. Commuters
39 traveling on Capitol Corridor trains from Sacramento and the East Bay can connect to Caltrain at
40 the Santa Clara and San Jose Diridon Stations. The Capital Corridor is managed by the Capitol
41 Corridor Joint Powers Authority (CCJPA), a partnership of six local transit agencies in the eight-
42 county service area. BART provides daily management support to the CCJPA, and trains are
43 operated by Amtrak.

1 **Existing Traffic Conditions**

2 **Roadway System**

3 The Caltrain corridor within the study area runs parallel to major north-south oriented freeways,
4 Interstate (I)-280 and U.S. Highway 101 (US 101). East-west oriented freeways in the study area
5 include I-380 and I-880. Figure 3.14-1 displays the major freeways within the study area. Table
6 3.14-5 lists major freeways and arterials in study area.

7 **Table 3.14-5. Major Freeways, Expressways, and Arterial Streets in Study Area**

County	Orientation	Name	Classification	Extent within Study Area
San Francisco	North-South	U.S. Highway 101	Freeway	San Francisco County to Santa Clara County
San Francisco	North-South	Interstate 280	Freeway	San Francisco County to Santa Clara County
San Francisco	East-West	Cesar Chavez Street	Arterial	San Francisco County
San Mateo	East-West	Interstate 380	Freeway	San Mateo County
San Mateo	North-South	State Route 82/El Camino Real	Arterial	San Mateo County to Santa Clara County
San Mateo	East-West	State Route 92	Freeway	San Mateo County
San Mateo	East-West	State Route 84	Arterial/Expressway	San Mateo County
Santa Clara	East-West	State Route 85	Freeway	Santa Clara County
Santa Clara	East-West	Lawrence Expressway	Arterial/Expressway	Santa Clara County
Santa Clara	North-South	State Route 87	Freeway	Santa Clara County
Santa Clara	Northeast-Southwest	Interstate 880	Freeway	Santa Clara County
Santa Clara	North-South	Alma/Central Expressway	Arterial/Expressway	Santa Clara County

Source: Appendix D, *Transportation Analysis*

8
9 I-280 begins in San Francisco and terminates in the south at the US 101 and I-680 interchange in
10 north San Jose. Within the study area, US 101 connects to I-80 in San Francisco and continues south
11 through Santa Clara County. I-380 runs east-west in north San Mateo County, connecting I-280 and
12 US 101 and crossing perpendicular to the Caltrain ROW. In San Jose north of the US 101 and I-280
13 interchange, I-880 crosses perpendicular to the Caltrain ROW in a northeast to southwest
14 orientation.

15 The Caltrain ROW runs parallel to or intersects with some major arterials in the study area. In San
16 Francisco, Caltrain runs across east-west arterial Cesar Chavez Street above grade. The corridor
17 runs parallel to State Route (SR) 82 (El Camino Real). El Camino Real is a major north-south
18 oriented roadway that extends from San Mateo County south to Santa Clara County within the study
19 area. In San Mateo County, SR 92 connects El Camino Real with US 101 and continues on to become
20 the San Mateo Bridge, crossing the San Francisco Bay. Also in San Mateo County, Caltrain crosses SR
21 84 at Woodside Road in Redwood City. SR 84 eventually joins US 101 and continues east across the
22 San Francisco Bay as the Dumbarton Bridge. In Santa Clara County, Caltrain travels parallel to Alma

1 Road/Central Expressway, which terminates at Mineta San Jose International Airport located west
2 of Guadalupe Parkway.

3 **Roadway System Performance**

4 Congestion during the weekday morning and afternoon peak period is common on US 101 in both
5 directions through San Francisco, San Mateo and Santa Clara Counties. During the morning peak
6 period, southbound congestion on US 101 is common in San Francisco, from San Francisco
7 International Airport to San Mateo, and in Palo Alto. Northbound US 101 during the morning peak
8 period is regularly congested from San Jose to north of Mountain View in Santa Clara County, as well
9 as near the San Francisco International Airport and in San Francisco. During the afternoon peak
10 period, southbound US 101 has notable congestion from South San Francisco to Burlingame, San
11 Carlos to Palo Alto, and Mountain View to San Jose. Northbound US 101 during the afternoon is
12 mostly congested in Mountain View, San Carlos, and San Francisco.

13 I-280 also runs in a north-south orientation on the San Francisco Peninsula and is prone to backups
14 during the peak period. During the morning peak period, southbound congestion is common from
15 Daly City to San Bruno. Northbound morning congestion is common from San Jose to Cupertino and
16 entering San Francisco. During the afternoon peak period, southbound congestion is common in
17 southern San Francisco, Los Altos, and from Cupertino to San Jose. Northbound evening congestion
18 typically occurs from Portola Valley to Woodside in San Mateo County.

19 **At-Grade Crossings with Gates**

20 Currently, there are 42 at-grade crossings of the Caltrain ROW within the study area. An at-grade
21 crossing is an intersection of Caltrain tracks, roadways, walkways, or a combination of these at the
22 same level. All other crossings in the study area are grade-separated, meaning that roadways,
23 walkways, and railroads cross at different, non-conflicting elevations. Of the 42 at-grade crossings,
24 ~~29-31~~ at-grade crossing locations are adjacent to study intersections have gates on all sides of the
25 ~~tracks that intersect with other travel modes.~~ Figure 3.14-6 displays all 42 at-grade crossings. The
26 study evaluates the ~~29-31~~ at-grade crossings with gates because Proposed Project operation could
27 potentially affect the gate-down times at the crossing locations and thus the adjacent study
28 intersections.

29 Gate-down time is a key measurement for both the performance of the existing and future Caltrain
30 operations in this study. Gate-down time is a summation of multiple actions that occur in sequence
31 in order to ensure all travel modes can cross safely at an at-grade crossing. These actions are listed
32 and explained in chronological order below.

- 33 1. Gate flashers, located on gate arms to increase visibility, are triggered by a gate crossing event².
- 34 2. Gate arms descend, moving from vertical to horizontal position, indicating that all vehicular,
35 bicycle, and pedestrian traffic must stop at the crossing to allow the train(s) to pass safely.
- 36 3. Train passes and fully clears the crossing.
- 37 4. Gate arms rise, moving from horizontal to vertical position.

² A gate-down event occurs when a train crosses or stops at a nearby upstream station. It can also occur when two trains pass simultaneously in opposite directions at a crossing.



Source: Fehr and Peers 2014.

Figure 3.14-6 Study Intersections and At-Grade Crossings

00606.12/DEIR (01-14) SS

1 After this sequence is complete, pedestrian, bicycle, and vehicular traffic can resume regular
2 operations through the crossing. The gate-down times are key inputs into the intersection level of
3 service analysis presented in the section below. The average gate-down times at the ~~29~~ 31 at-grade
4 crossings in the study area were calculated empirically from gate-down event records collected in
5 the field (2013). These records included the train number, timestamp of when the gate-down event
6 sequence started, and a timestamp of when the gate-down event ended (when the gate arms were
7 fully raised and the flashing red lights were off). Data on whether two trains occupied the crossing
8 during the same gate down event (a “2-for-1” event), or if the gate-down sequence restarted was
9 also used for this analysis. The gate-down time results are key inputs into the intersection level of
10 service analysis presented in next section.

11 **Intersection Levels of Service**

12 To evaluate how the Proposed Project would affect corridor traffic patterns, a total of ~~82~~ 91 select
13 intersections³ in the study area were analyzed. These intersections were selected for evaluation
14 using a tiered approach based on the criteria described below.

- 15 • Intersection Operations/Level of Service (LOS): Currently operating at LOS D, E, or F during
16 peak hours.
- 17 • Transit-Oriented Development (TOD): Adjacent to station where significant TOD is planned.
- 18 • Gate-Down Time: Adjacent to at-grade crossing where the Proposed Project would result in
19 substantial change in gate-down time.
- 20 • Intersection Geometry: Unusual geometry and/or signal operations.

21 Intersections in the study area that meet one or more of the criteria outlined above were selected
22 for study using traffic operations modeling tools. As an additional step to provide additional
23 discussion of potential traffic changes due to the Proposed Project, other intersections in the study
24 area that do not meet the above criteria were reviewed qualitatively.

25 Intersection operation conditions described in the study are for the weekday AM peak hour typically
26 between 7:00 a.m. and 9:00 a.m. and the weekday PM peak hour typically between 4:00 p.m. to 6:00
27 p.m. For more detailed information on the traffic model development and analysis process, including
28 how the ~~82~~ 91 intersections were selected, see the transportation analysis report in Appendix D,
29 *Transportation Analysis*. The ~~82~~ 91 intersections are shown on Figure 3.14-6 along with Caltrain
30 stations and at-grade crossing locations.

31 The intersection analysis results include a descriptive term known as level of service (LOS). Level of
32 service is a measure of traffic operating conditions, which varies from LOS A, which represents free
33 flow conditions, with little or no delay, to LOS F, which represents congested conditions, with
34 extremely long delays. Methods described in the Highway Capacity Manual (Transportation
35 Research Board 2010) were used to calculate the levels of service for signalized and stop-controlled
36 intersections. Levels of service for signalized intersections are determined by the average delay
37 experienced by vehicles at the intersection. Table 3.14-6 summarizes the relationship between delay
38 and levels of service for signalized intersections.

³ The intersection of Broadway and US 101 Southbound Ramps (#84a) in Burlingame was added to the list of intersections as a result of the US 101/Broadway Interchange Reconstruction project; however, this intersection does not exist under Existing Conditions, bringing the total number of intersections modeled for future conditions to 91.

1 **Table 3.14-6. Level of Service Designations for Signalized and Stop-Controlled Intersections**

LOS Designation	Average Delay per Vehicle (seconds/vehicle)	
	Signalized Intersections	Stop-Controlled Intersections
A	≤ 10.0	≤ 10.0
B	10.1 to 20.0	10.1 to 15.0
C	20.1 to 35.0	15.1 to 25.0
D	35.1 to 55.0	25.1 to 35.0
E	55.1 to 80.0	35.1 to 50.0
F	> 80.0	> 50.0

Source: Appendix D, *Transportation Analysis*

2
3 For stop-controlled intersections, levels of service depend on the average delay experienced by
4 vehicles on the stop-controlled approaches. Thus, for side-street stop-controlled intersections, levels
5 of service are based on the average delay experienced by vehicles entering the intersection from the
6 minor (stop-controlled) streets and vehicles making left-turns from the major street. For all-way
7 stop-controlled intersections, levels of service are determined by the average delay for all
8 movements through the intersection. The levels of service designations for stop-controlled
9 intersections have different threshold values than those for signalized intersections, primarily
10 because drivers expect different levels of performance from distinct types of transportation
11 facilities. In general, stop-controlled intersections are expected to carry lower volumes of traffic
12 than signalized intersections. Thus, for the same level of service, a lower level of delay is acceptable
13 at stop-controlled intersections than at signalized intersections. Table 3.14-6 summarizes the
14 relationship between delay and levels of service for stop-controlled intersections.

15 Table 3.14-7 identifies the geographic location of each study intersection and the associated AM and
16 PM peak period levels of service at the study intersections. The study intersections include the at-
17 grade crossing intersections with gates that are identified in the previous section. The traffic
18 operation analysis at these at-grade crossing intersections take into account the vehicle delay during
19 the gate-down events with the average gate-down times collected in the field (2013), as described in
20 the previous section.

21 **Table 3.14-7. Existing Intersection Delay and Levels of Service (2013)**

22 *Changes since the Draft EIR are shown in italics.*

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	Delay ^b	LOS ^c
ZONE 1						
1	4th Street & King Street	SF	AM PM	Signal	56.6 84.5	E F
2	4th Street & Townsend Street	SF	AM PM	Signal	28.9 28.8	C C
3	Mission Bay Drive & 7th Street	SF	AM PM	Signal	8.3 12.7	A B
4	Mission Bay Drive & Berry Street	SF	AM PM	Signal	2.3 8.4	A A
5	7th Street & 16th Street	SF	AM PM	Signal	67.3 49.5	E D

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	Delay ^b	LOS ^c
6	16th Street & Owens Street	SF	AM PM	Signal	10.6 10.7	B B
7	22nd Street & Pennsylvania Street	SF	AM PM	All-way Stop	7.6 7.3	A A
8	22nd Street & Indiana Street	SF	AM PM	All-way Stop	5.3 5.4	A A
9	Tunnel Avenue & Blanken Avenue	SF	AM PM	All-way Stop	7.9 7.2	A A
10	Linden Avenue & Dollar Avenue	SSF	AM PM	Signal	15.1 48.9	B D
11	East Grand Avenue & Dubuque Way	SSF	AM PM	Signal	7.5 7.5	A A
12	S Linden Avenue & San Mateo Avenue	SSF	AM PM	Signal	6.7 7.4	A A
13	Scott Street & Herman Street	SB	AM PM	Side-Street Stop	9.8 14.0	A B
14	Scott Street & Montgomery Avenue	SB	AM PM	Side-Street Stop	4.8 5.7	A A
15	San Mateo Avenue & San Bruno Avenue	SB	AM PM	Signal	10.9 >120	B F
ZONE 2						
16	El Camino Real & Millbrae Avenue	MB	AM PM	Signal	43.4 42.7	D D
17	Millbrae Avenue & Rollins Road	MB	AM PM	Signal	33.0 38.8	C D
18	California Drive & Broadway	BG	AM PM	Signal	<u>80.5</u> <u>58.7</u>	<u>F</u> <u>E</u>
19	Carolan Avenue & Broadway	BG	AM PM	Signal	<u>26.5</u> <u>39.2</u>	<u>C</u> <u>D</u>
20	California Drive & Oak Grove Avenue	BG	AM PM	Signal	34.3 24.2	C C
21	Carolan Avenue & Oak Grove Avenue	BG	AM PM	Side-Street Stop	>120 92.1	F F
22	California Drive & North Lane	BG	AM PM	Side-Street Stop	<u>14.7</u> <u>11.4</u>	<u>B</u> <u>B</u>
23	Carolan Avenue & North Lane	BG	AM PM	Side-Street Stop	23.0 17.8	C C
24	Anita Road & Peninsula Avenue	BG	AM PM	Side-Street Stop	15.6 >120	C F
<u>83</u>	<u>Broadway and Rollins Road</u>	<u>BG</u>	<u>AM</u> <u>PM</u>	<u>Signal</u>	<u>46.2</u> <u>95.6</u>	<u>D</u> <u>F</u>
<u>84</u>	<u>Rollins Road and Cadillac Way</u>	<u>BG</u>	<u>AM</u> <u>PM</u>	<u>Signal</u>	<u>89.1</u> <u>48.3</u>	<u>F</u> <u>D</u>
<u>85</u>	<u>Bayswater Avenue and California Drive</u>	<u>BG</u>	<u>AM</u> <u>PM</u>	<u>Signal</u>	<u>9.1</u> <u>8.7</u>	<u>A</u> <u>A</u>
25	Woodside Way & Villa Terrace	SM	AM PM	Side-Street Stop	5.1 4.7	A A
26	North San Mateo Drive & Villa Terrace	SM	AM PM	Side-Street Stop	11.7 12.8	B B
27	Railroad Avenue & 1st Avenue	SM	AM PM	Side-Street Stop	10.4 19.0	B C

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	Delay ^b	LOS ^c
28	South B Street & 1st Avenue	SM	AM PM	Signal	22.6 30.5	C C
29	9th Avenue & S Railroad Avenue	SM	AM PM	Side-Street Stop	34.7 21.4	D C
30	South B Street & 9th Avenue	SM	AM PM	Signal	15.0 14.4	B B
31	Transit Center Way & 1st Avenue	SM	AM PM	Uncontrolled	5.1 26.7	A D
32	Concar Drive & SR 92 Westbound Ramps	SM	AM PM	Signal	6.0 6.1	A A
33	S Delaware Street & E 25th Avenue	SM	AM PM	Signal	19.1 20.6	B C
34	E 25th Avenue & El Camino Real	SM	AM PM	Signal	32.0 80.6	C F
35	31st Avenue & El Camino Real	SM	AM PM	Signal	19.2 68.7	B E
36	E Hillsdale Boulevard & El Camino Real	SM	AM PM	Signal	43.7 67.1	D E
37	E Hillsdale Blvd. & Curtiss Street	SM	AM PM	Signal	12.0 14.7	B B
38	Peninsula Avenue & Arundel Road & Woodside Way	SM	AM PM	Side-Street Stop	14.3 >120	B F
39	El Camino Real & Ralston Avenue	BL	AM PM	Signal	>120 85.4	F F
40	El Camino Real & San Carlos Avenue	SC	AM PM	Signal	25.6 47.1	C D
41	Maple Street & Main Street	RC	AM PM	Side-Street Stop	<u>10.9</u> <u>14.3</u>	<u>B</u> <u>B</u>
42	Main Street & Beech Street	RC	AM PM	Side-Street Stop	<u>5.2</u> 8.6	A A
ZONE 3						
43	Main Street & Middlefield Road	RC	AM PM	Signal	<u>12.5</u> <u>20.1</u>	<u>B</u> <u>C</u>
44	Broadway Street & California Street	RC	AM PM	Signal	<u>60.0</u> >120	F F
45	El Camino Real & Whipple Avenue	RC	AM PM	Signal	74.7 48.3	E D
46	Arguello Street & Brewster Avenue	RC	AM PM	Signal	<u>14.7</u> <u>39.4</u>	<u>B</u> <u>D</u>
47	El Camino Real & Broadway Street	RC	AM PM	Signal	<u>27.5</u> <u>45.5</u>	<u>C</u> <u>D</u>
48	Arguello Street & Marshall Street	RC	AM PM	Signal	<u>15.1</u> <u>48.7</u>	<u>B</u> <u>D</u>
49	El Camino Real & James Avenue	RC	AM PM	Signal	<u>26.2</u> <u>33.7</u>	C C
50	El Camino Real & Fair Oaks Lane	AT	AM PM	Signal	33.6 27.6	C C
51	El Camino Real & Watkins Avenue	AT	AM PM	Side-street stop	34.5 48.1	D E
52	Fair Oaks Lane & Middlefield Road	AT	AM PM	Side-Street Stop	>120 41.3	F E

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	Delay ^b	LOS ^c
53	Watkins Avenue & Middlefield Road	AT	AM PM	Side-Street Stop	31.6 28.3	D D
54	Glenwood Avenue & Middlefield Road	AT	AM PM	Side-Street Stop	49.2 >120	E F
<u>87</u>	<u>Encinal Avenue and Middlefield Road</u>	<u>AT</u>	<u>AM</u> <u>PM</u>	<u>Signal</u>	<u>19.3</u> <u>12.7</u>	<u>B</u> <u>B</u>
<u>86</u>	<u>Encinal Avenue and El Camino Real</u>	<u>MP</u>	<u>AM</u> <u>PM</u>	<u>Signal</u>	<u>25.5</u> <u>30.9</u>	<u>C</u> <u>C</u>
55	El Camino Real & Glenwood Avenue	MP	AM PM	Signal	34.1 29.6	C C
56	El Camino Real & Oak Grove Avenue	MP	AM PM	Signal	17.9 30.9	B C
57	El Camino Real & Santa Cruz Avenue	MP	AM PM	Signal	9.1 12.5	A B
58	Merrill St & Santa Cruz Avenue	MP	AM PM	All-way Stop	7.3 8.9	A A
59	Ravenswood Avenue & Alma Street	MP	AM PM	Side-Street Stop	24.4 17.1	C C
60	El Camino Real & Ravenswood Avenue	MP	AM PM	Signal	39.3 119.0	D F
61	Ravenswood Avenue & Laurel Street	MP	AM PM	Signal	31.0 26.3	C C
<u>88</u>	<u>Laurel Street and Oak Grove Avenue</u>	<u>MP</u>	<u>AM</u> <u>PM</u>	<u>Signal</u>	<u>9.7</u> <u>8.6</u>	<u>A</u> <u>A</u>
<u>89</u>	<u>Laurel Street and Glenwood Avenue</u>	<u>MP</u>	<u>AM</u> <u>PM</u>	<u>All-way Stop</u>	<u>6.6</u> <u>5.9</u>	<u>A</u> <u>A</u>
<u>90</u>	<u>Laurel Street and Encinal Avenue</u>	<u>MP</u>	<u>AM</u> <u>PM</u>	<u>All-way Stop</u>	<u>5.7</u> <u>9.5</u>	<u>A</u> <u>A</u>
62	Alma Street & Palo Alto Avenue	PA	AM PM	Side-Street Stop	11.2 14.6	B B
63	Meadow Drive & Alma Street	PA	AM PM	Signal	72.6 62.0	E E
64	El Camino Real & Alma Street & Sand Hill Road	PA	AM PM	Signal	60.7 49.1	E D
65	High Street & University Avenue	PA	AM PM	Signal	12.6 14.1	B B
66	Alma Street & Churchill Avenue	PA	AM PM	Signal	66.0 64.0	E E
67	W Meadow Drive & Park Boulevard	PA	AM PM	Side-Street Stop	>120 29.3	F D
68	Alma Street & Charleston Road	PA	AM PM	Signal	63.5 <u>80.5</u>	E <u>F</u>
69	Showers Drive & Pacchetti Way	MV	AM PM	Signal	4.5 3.7	A A
70	Central Expressway & N Rengstorff Avenue	MV <u>SCC</u>	AM PM	Signal	<u>75.5</u> <u>90.9</u>	<u>E</u> <u>F</u>
71	Central Expressway & Moffett Boulevard & Castro Street	MV <u>SCC</u>	AM PM	Signal	<u>76.3</u> <u>66.5</u>	<u>E</u> <u>E</u>
72	W Evelyn Avenue & Hope Street	MV	AM PM	Signal	3.0 4.0	A A
73	Rengstorff Avenue & California Street	MV	AM PM	Signal	50.3 55.6	D E

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	Delay ^b	LOS ^c
74	Castro Street & Villa Street	MV	AM PM	Signal	11.8 21.2	B C
75	W Evelyn Avenue & S Mary Avenue	SV	AM PM	Signal	62.4 61.5	E E
76	W Evelyn Avenue & Frances Street	SV	AM PM	Signal	16.1 23.4	B C
ZONE 4						
77	Kifer Road & Lawrence Expressway	SCL SCC	AM PM	Signal	96.6 >120	F F
78	Reed Avenue & Lawrence Expressway	SCL SCC	AM PM	Signal	97.3 93.7	F F
79	El Camino Real & Railroad Avenue	SCL	AM PM	Signal	26.6 21.3	C C
80	W Santa Clara Street & Cahill Street	SJ	AM PM	Signal	10.4 12.7	B B
81	S Montgomery Street & W San Fernando Street	SJ	AM PM	Signal	7.9 9.6	A A
82	Lick Avenue & W Alma Avenue	SJ	AM PM	Signal	15.8 20.8	B C

Source: Appendix D, *Transportation Analysis*

Notes:

^a AM = morning peak hour, PM = afternoon peak hour

^b Delay measured in seconds.

^c LOS designation pursuant to 2010 Highway Capacity Manual

Jurisdictions:

SF	San Francisco	SM	San Mateo	MV	Mountain View
SSF	South San Francisco	BL	Belmont	SV	Sunnyvale
SB	San Bruno	SC	San Carlos	SCL	Santa Clara
MB	Millbrae	RC	Redwood City	SCC	Santa Clara County
BG	Burlingame	AT	Atherton	SJ	San Jose
MP	Menlo Park	PA	Palo Alto		

1

2 **Existing Bicycle and Pedestrian Conditions**

3 **Bikeway Facilities Connected to Caltrain Stations**

4 In general, bicycle facilities within the study area are characterized by a network of mostly
5 continuous routes within about 1 mile of stations. Bicycle facilities are classified based on the
6 standard typology described below.

- 7 • Class I Bikeway (Bikeway Path): A completely separate ROW designated for the exclusive use of
8 bicycles and pedestrians, with vehicle and pedestrian cross-flows minimized.
- 9 • Class II Bikeway (Bikeway Lane): A restricted ROW designated for the use of bicycles, with a
10 striped lane on a street or highway. Bicycle lanes are generally 5 feet wide. Vehicle parking and
11 vehicle and pedestrian cross-flows are permitted.
- 12 • Class III Bikeway (Bikeway Route): A ROW designated by signs or pavement markings for
13 shared use with pedestrians or motor vehicles.

1 Most, but not all, Caltrain stations are connected to the surrounding roadway network via some type
 2 of bicycle facility. Existing bicycle facilities connected to Caltrain stations in the study area are
 3 shown in a figure in Appendix D. Major Class I bikeways in the study area include the Guadalupe
 4 River Trail, Bay Trail, Los Gatos Creek Trail, and the Coyote Creek Trail. The Guadalupe Trail, Los
 5 Gatos Creek Trail, and Coyote Creek Trail are located in Santa Clara County. The San Francisco Bay
 6 Trail runs through nine counties, including all three counties within the study area.

7 The density of bicycle facilities around stations varies. The average Caltrain station has about 13
 8 miles of bicycle facilities within 1 mile. The Sunnyvale Station is surrounded by the most bike facility
 9 miles, with 24.3 miles within 1 mile of the station. The Mountain View Station is similar, with 24.1
 10 miles of bike facilities within 1 mile of the station. Most bike facility miles near the Sunnyvale Station
 11 are Class III (15.8); around the Mountain View Station, Class II lanes are most common (16.7 miles).
 12 The San Carlos, South San Francisco, Palo Alto, and San Francisco 4th and King Stations are also near
 13 at least 17 miles of bikeway facility miles. Santa Clara, San Bruno, and College Park Stations are near
 14 fewer than 5 miles of bikeway facility miles. Overall, Class III bikeway routes are the most common
 15 type of bike facility near stations.

16 **Bicycles Boardings and Parking at Caltrain Stations**

17 Bicycles are allowed on Caltrain during all operating hours. Because bicycle boardings on Caltrain
 18 are on the rise, specific cars have been retrofitted to increase bicycle carrying capacity and store
 19 bicycles safely during travel.

20 Bike mode share of ridership has been increasing but the raw number of increased boardings is
 21 greater than the increase in the numbers of daily bike boarding. Average daily bike boardings
 22 increased by 16 percent from 2011 to 2012, outpacing the total ridership growth rate. From 2012 to
 23 2013, bicycle boarding increased by another 16 percent, compared with a total ridership increase of
 24 11 percent (Caltrain 2013b). Table 3.14-8 displays the top ten stations for bicycles brought on-
 25 board by passengers. The 4th and King Station in San Francisco is a major bike boarding station,
 26 with almost double the number of bikes that board at Palo Alto.

27 **Table 3.14-8. Top Ten Stations for Bicycle Ridership (2013)**

Station	Average Weekday Bicycle Ridership	Total Average Weekday Ridership	Proportion of Total Ridership at Station
San Francisco 4th and King	1,166	10,786	11%
Palo Alto	644	5,469	12%
Mountain View	464	3,876	12%
San Jose Diridon	305	3,489	9%
Redwood City	307	2,619	12%
Hillsdale	191	2,317	8%
Sunnyvale	215	2,274	9%
Menlo Park	169	1,526	11%
22nd Street	174	1,312	13%
California Avenue	199	1,294	15%

Source: Appendix D, *Transportation Analysis*

28

1 The boarding of passengers with bicycles is on a first-come, first-serve basis. If a bicycle car is full,
2 the cyclist is asked to exit the train and wait for the next train, a situation commonly referred to as a
3 “bicycle bump or denial.” Bicycle denials can also be caused by additional circumstances, including
4 swapped equipment and bicycle stacking that does not use the actual full capacity. In general,
5 bicycle car capacity issues occur at the height of the morning and evening peak periods (SamTrans
6 2013).

7 In February 2013, Caltrain conducted annual ridership counts. This effort included a tally of
8 passengers with bicycles who were denied boarding because of bicycle capacity limitations. Data
9 were collected over the course of ± one week and were not averaged. A total of 59 cyclists on seven
10 trains were denied boarding. The majority of boarding denials occurred on southbound trains. In
11 general, fewer than five bicycles are denied boarding at a time, but on occasion bike denials can
12 affect a larger number of bicycles. Bicycle denials tend to occur at the Redwood City, Millbrae, and
13 22nd Street Stations but have been observed and reported throughout the system. The new
14 passenger information system at the station (visual electronic message signs at the platforms) is
15 able to broadcast and redirect bicyclists away from trains that are full to those that still have
16 capacity.

17 Cyclists who ride Caltrain can either store their bicycles at Caltrain stations or bring their bicycles
18 on board, both options which are limited by capacity. The majority of Caltrain cyclists bring their
19 bikes on-board the train rather than parking their bike at a Caltrain station. As shown in Figure 3.14-
20 4, of the 14 percent of Caltrain passengers who access stations via bicycle, about 13 percent of
21 passengers bring their bicycles on-board, while about 1 percent of passengers park their bicycles at
22 their origin station. In 2013, a total of 4,900 bicycles boarded daily.

23 At the Caltrain station, cyclists can store their bicycles on racks, lockers, or shared access bicycle
24 parking facilities. Table 3.14-9 provides an inventory of dedicated bike parking capacity, by station.
25 The only Caltrain station without dedicated bicycle parking is the College Park Station. The majority
26 of bike parking facilities, including racks, lockers and shared facilities is owned and administered
27 directly by Caltrain. At some stations, however, facilities may be owned and operated by a local
28 jurisdiction or other transit property. Table 3.14-9 reflects all publicly available bike parking
29 facilities regardless of administration or ownership.

30 Because trains have limited on-board space, Caltrain encourages customers to park their bikes at
31 Caltrain stations or make use of the newly-implemented regional bike share pilot program, Bay Area
32 Bicycle Share. The pilot program, led by the Bay Area Air Quality Management District (BAAQMD),
33 was launched in August 2013 and is intended to provide easy access to a network of bicycles. The
34 program proposes 700 bikes at 70 kiosk stations along the Peninsula corridor in San Francisco,
35 Redwood City, Palo Alto, Mountain View, and San Jose. Members are able to check out a bike close to
36 home or work and return it to any of the kiosk stations. The San Francisco 4th & King, Redwood City,
37 Palo Alto, San Antonio, Mountain View, and San Jose Diridon Stations have a bicycle share kiosk at or
38 within one 0.5 mile of the station.

1 **Table 3.14-9. Bicycle Parking Capacity at Caltrain Stations (2013)**

Station	Bicycle Rack Spaces	Bicycle Locker Spaces	Other Bicycle Amenities
4th and King	6	180	Attended bicycle parking facility Bay Area Bike Share kiosk
22nd Street	27	0	None
Bayshore	18	8	None
South San Francisco	18	20	None
San Bruno	8	16	None
Millbrae	24	28	None
Burlingame	13	18	None
San Mateo	11	12	None
Hayward Park	18	4	None
Hillsdale	18	12	None
Belmont	18	24	None
San Carlos	36	48	None
Redwood City	18	50	Bay Area Bike Share kiosk
Menlo Park	8	50	Shared access bicycle storage shed
Palo Alto	178	94	Shared access bicycle storage shed Electronic lockers Bay Area Bike Share kiosk
California Avenue	33	42	None
San Antonio	18	38	Bay Area Bike Share kiosk
Mountain View	23	116	Shared access bicycle storage shed Bay Area Bike Share kiosk
Sunnyvale	18	71	None
Lawrence	18	24	None
Santa Clara	18	54	Additional bicycle lockers across the street at VTA Transit Center (adjacent)
College Park	0	0	None
San Jose Diridon	16	48	Bay Area Bike Share kiosk
Tamien	18	18	None

Source: Appendix D, *Transportation Analysis*

2
3 **Pedestrian Environment in Station Areas**

4 The existing pedestrian infrastructure surrounding Caltrain stations in the study area provides a
5 good level of accessibility, considering the varied mix of land uses around stations. Overall, walking
6 to Caltrain stations is the most popular mode of access for passengers system-wide. As shown in
7 Figure 3.14-4, about 36 percent of Caltrain passengers access Caltrain stations by walking.

8 ***Pedestrian Amenities***

9 Although all stations offer mostly consistent pedestrian amenities on the platform, the quality of the
10 pedestrian environment around the station area varies. Pedestrian environment on station
11 platforms and within 0.25 mile of each station were evaluated based on field observations for the
12 following components: wheelchair accessibility, direction of access to station, sidewalk

1 completeness, presence of crosswalks, density of street trees, proximity to freeway, maximum
2 posted speed limit on adjacent streets, and traffic calming measures on surrounding streets. Table
3 3.14-10 summarizes existing pedestrian environment and amenities within 0.25 mile of each
4 station.

5 In addition the amenities listed in Table 3.14-10, most stations have audio public address systems to
6 announce emergencies and train delays. Many stations also have electronic message boards to
7 communicate with passengers. Some stations also include space for vendors who sell goods and
8 services to passengers, including food and beverages.

9 ***Accessibility for Disabled Passengers***

10 The majority of Caltrain stations are accessible to persons with disabilities, who can board either via
11 a lift or accessible ramp. The following stations do not have wheelchair lifts: 22nd Street, South San
12 Francisco, Broadway, Atherton, and College Park. All stations include a blue boarding assistance
13 area for passengers with disabilities who need boarding assistance from the conductor. Every train
14 has at least one wheelchair accessible car that can accommodate up to three wheelchairs or mobility
15 devices (e.g., two-wheeled Segways). All wheelchair accessible cars are equipped with an accessible
16 restroom.

17 ***Pedestrians and Public Crossings***

18 A mix of grade-separated and at-grade crossings exist at Caltrain stations within the study area. For
19 example, at San Jose Diridon and Palo Alto Stations, passengers can access the opposing directional
20 platform via an underground pedestrian walkway. This type of grade-separated crossing does not
21 require a passenger to cross over active railroad tracks. However, at some stations, such as
22 Mountain View and Sunnyvale, at-grade crossings exist for passengers to cross tracks at the same
23 level. These designated at-grade crossings are marked by a sign and/or a gate.

24 Because trains can operate at speeds up to 79 mph, pedestrians traversing at-grade crossings are
25 advised to take great care by looking both ways and listening for oncoming trains. Caltrain
26 distributes information to educate passengers on public crossing and platform safety on the Caltrain
27 website, at Caltrain headquarters, in station areas, and on-board trains.

28 ***Existing Automobile Parking Conditions***

29 This section summarizes existing parking capacity and occupancy at Caltrain parking lots located in
30 station areas. In addition, on-street parking and parking lot capacities within the station areas are
31 discussed. In general, Baby Bullet stations that have Caltrain parking lots tend to experience the
32 highest parking occupancy rates. As shown in Figure 3.14-4, about 23 percent of passengers access
33 Caltrain by car: about 13 percent drove alone, 8 percent were dropped off, and 1 percent carpooled.
34 Passengers who drove alone or carpooled, also referred to as park-and-ride passengers, generally
35 park their car at or near the station during the duration of their trip. Some passengers may leave a
36 second vehicle at their destination station to have access to a private automobile to get to their
37 ultimate destination. In total, about 14 percent of Caltrain passengers are park-and-ride customers.

38 The majority of Caltrain stations offer 24-hour parking. There are no Caltrain-operated parking lots
39 at the 4th and King and 22nd Street Stations in San Francisco. Table 3.14-11 displays parking
40 capacity and the average daily occupancy at each station in 2012.

Table 3.14-10. Existing Pedestrian Environment and Amenities in Station Areas

Station	Wheelchair Accessibility	Directions of Pedestrian Access ^a	Sidewalk Completeness	Presence of Crosswalks ^b	Density of Street Trees ^c	Near Freeway	Maximum Posted Speed Limit	Traffic Calming ^d
4th and King	Lifts on both platforms	4	75%	3	1	No	35 mph on King Street; 25 mph on other streets	No
22nd Street	No lift available	4	75%	2	2	Yes	25 mph on 22nd Street at Pennsylvania Street	No
Bayshore	Lifts on both platforms	3	25%	2	1	No	35 mph on Tunnel	No
South San Francisco	No lift available	2	75%	1	1	Yes	35 mph on East Grand Avenue	Yes
San Bruno	Lifts on both platforms	4	50%	1	1	No	30 mph on Huntington Avenue	Yes
Millbrae	Lifts and mini-high ramps on both platforms	4	75%	1	2	No	35 on El Camino Real	No
Burlingame	Lifts on both platforms	4	100%	2	2	No	25 mph on Howard Avenue	No
San Mateo	Lifts and mini-high ramps on both platforms	4	100%	3	2	No	25 mph on B Street	Yes
Hayward Park	Lifts on both platforms	4	50%	2	2	Yes	30 mph on Delaware Street	No
Hillsdale	Lifts and mini-high ramps on both platforms	3	75%	1	1	No	35 mph on Hillsdale Boulevard/El Camino	No
Belmont	Lifts on both platforms	4	75%	3	2	No	35 mph on El Camino	No
San Carlos	Lifts and mini-high ramps on both platforms	4	75%	1	2	No	35 mph on El Camino	Yes
Redwood City	Lifts and mini-high ramps on both platforms	4	100%	2	2	No	35 mph on El Camino	Yes
Menlo Park	Lifts and mini-high ramps on both platforms	4	100%	3	3	No	35 mph on El Camino	Yes
Palo Alto	Lifts and mini-high ramps on both platforms	4	75%	2	3	No	35 mph on El Camino	Yes

Station	Wheelchair Accessibility	Directions of Pedestrian Access ^a	Sidewalk Completeness	Presence of Crosswalks ^b	Density of Street Trees ^c	Near Freeway	Maximum Posted Speed Limit	Traffic Calming ^d
California Avenue	Lifts on both platforms	2	75%	2	2	No	35 mph on Alma Street	Yes
San Antonio	Lifts on both platforms	3	75%	3	2	No	45 mph Central Expressway	Yes
Mountain View	Lifts and mini-high ramps on both platforms	3	75%	3	2	No	45 mph on Central Expressway	Yes
Sunnyvale	Lifts and mini-high ramps on both platforms	4	75%	3	1	No	35 mph on Mathilda Avenue	No
Lawrence	Lifts on both platforms	2	50%	0	1	No	40 mph on Kifer Road	No
Santa Clara	Lifts and mini-high ramps on both platforms	3	75%	3	2	No	35 on El Camino Real	No
College Park	No lift available	2	75%	1	3	No	40 on Coleman Avenue	No
San Jose Diridon	Lifts and mini-high ramps on tracks 6-9	3	100%	3	1	No	35 mph on W Santa Clara Street	No
Tamien	Lifts on both platforms	2	75%	3	2	Yes	35 mph on W Alma Avenue	Yes

Source: Appendix D, *Transportation Analysis*

^a Measurement of the number of directions a pedestrian can access the station, out of four possible directions. (Scale of 0 to 4)

^b Measurement of marked crosswalks on streets adjacent to the station. (Scale of 0 to 3)

^c Measurement of street tree density at station and on surrounding streets. Street trees can provide some shade from weather elements and enhance the urban design of station areas. (Scale of 0 to 3)

^d Measurement indicating if traffic calming measures are in place on surrounding local or residential streets. Common traffic calming measures include curb extensions, pedestrian refuge islands, and speed bumps.

1 **Table 3.14-11. Parking Capacity and Average Weekday Occupancy at Caltrain Station Lots (2012)**

Station ^a	Caltrain Parking Lot Available (Yes / No)	Parking Capacity (Number of Parking Spots)	Average Daily Parking Occupancy
4th and King	No	--	--
22nd Street	No	--	--
Bayshore	Yes	38	13%
South San Francisco	Yes	74	51%
San Bruno	Yes	170	22%
Millbrae	Yes	490 ^b	80% ^b
Burlingame	Yes	69	30%
San Mateo	Yes	42	20%
Hayward Park	Yes	210	3%
Hillsdale	Yes	513	86%
Belmont	Yes	375	20%
San Carlos	Yes	207	32%
Redwood City	Yes	553	46%
Menlo Park	Yes	155	33%
Palo Alto	Yes	350	87%
California Avenue	Yes	169	31%
San Antonio	Yes	193	33%
Mountain View	Yes	336	97%
Sunnyvale	Yes	391	100%
Lawrence	Yes	122	30%
Santa Clara	Yes	190	62%
College Park ^c	No	--	--
San Jose Diridon	Yes	576	99%
Tamien	Yes	245	98%

Source: Appendix D, *Transportation Analysis*

^a Stations with Baby Bullet service are displayed in **bold**.

^b There are 170 Caltrain parking spaces. There are approximately 2,980 spaces in shared parking with BART and the lot is 80% utilized, leaving approximately, 640 available spaces. This analysis assumes that 50% of those spaces (320 spaces) are available for Caltrain riders.

^c There is no Caltrain lot at the College Park station. Parking is on the street. Given limited ridership and no plans to change service levels, parking demand was not evaluated at this location.

2
3 Several stations are close to or beyond full parking capacity. Average daily parking is slightly beyond
4 capacity at Sunnyvale, with more than 100 percent of cars parked in the lot. Parking in excess of 100
5 percent possibly indicates vehicles parked illegally in the Caltrain lot in restricted areas. Parking at
6 some Baby Bullet stations is very close to full capacity (90 percent or above) at Mountain View, San
7 Jose Diridon, and Tamien Station. Millbrae, Hillsdale, and Palo Alto Station parking lots are all
8 between 75 percent and 90 percent full. At stations with lower ridership, many lots are not full. At

1 stations where parking is at, near, or beyond capacity, passengers who choose to drive tend to look
2 for parking in non-Caltrain lots or on streets near the stations.

3 **Existing Freight Rail Service**

4 Freight service operates on the JPB-owned Caltrain corridor along with Caltrain passenger service
5 and other tenant passenger service (ACE, Amtrak and Capitol Corridor). From San Francisco to Santa
6 Clara, freight and passenger both use the same tracks, although there are areas where freight has
7 exclusive spur tracks and sidings that lead to customer locations outside the Caltrain ROW. South of
8 Santa Clara (south of Control Point [CP]) Coast at Milepost [MP] 44.7), freight has a dedicated freight
9 track (“MT-1”) owned by the Union Pacific Railroad (UPRR) to the southern end of the Caltrain
10 corridor (at CP Lick at MP 52.0). All tracks in the Caltrain corridor are dispatched by Caltrain. South
11 of MP 52.0, the ROW is owned by UPRR, which dispatches trains on its system, including Caltrain
12 passenger trains. Because the Proposed Project is limited to the Caltrain corridor, Caltrain is the sole
13 dispatcher within the project area.


14 Freight operates in the JPB-owned Caltrain corridor under a Trackage Rights Agreement (TRA)
15 between UPRR and the JPB. This TRA provides that between midnight and 5 a.m., at least one main
16 track will always be in service for freight. Between 10 a.m. and 3 p.m., the TRA requires the JPB to
17 provide at least one 30-minute headway window in each direction. In practice today, freight
18 commonly runs between 8 p.m. and 5 a.m., with occasional daytime service. Freight service hours
19 are not limited by the TRA on the UP-owned MT-1 track between CP Coast and CP Lick (Santa Clara
20 to south of Tamien Station).

21 Caltrain reviewed dispatch data for freight operations in the corridor in December 2012, which
22 indicated that there is an average of seven round trips per day along the Caltrain corridor as follows
23 and as shown in Figure 3.14-7.

- 24 ● San Francisco to South San Francisco freight yard—one round trip daily during daytime (“South
25 City” Local).
- 26 ● South San Francisco freight yard to Redwood City—one round trip daily during nighttime
27 (“Broadway”).
- 28 ● South San Francisco freight yard to San Jose (Newhall Yard)—one round trip daily during
29 nighttime (“Mission Bay”).
- 30 ● South Terminal Area (South of CP Coast)—four round trips daily (“Salinas,” “Granite Rock 1,”
31 “Granite Rock 2,” and “Permanente”) and one one-way daily (“MRVSI”).

32 Freight service does vary in response to freight customer needs and activity. For example, there was
33 a notable decline in freight operations during the 2008–2009 recession and slow recovery
34 afterwards, but freight service has been increasing in recent years with the economic recovery. In
35 addition to the routine daily traffic noted above, freight operators also run periodic trains to serve
36 non-routine episodic freight needs along the Caltrain corridor. The Peninsula Freight Rail User’s
37 Group (PFRUG) estimates that the number of rail cars between San Jose and San Francisco over the
38 past decade has averaged about 60 to 80 cars per day in each direction (once loaded, once empty).
39 This translates to 20,000–30,000 loaded rail cars carrying 2–3 million tons of cargo on the Peninsula
40 each year, the equivalent of at least 100,000 truck trips annually. During peak years in the past
41 decade, the numbers were substantially higher (PFRUG 2014).

Graphics/Project/Graphic/Project_Graphics_2012_Project_Graphics_00606_12-001_Caltrain_Electrification4/DEIR_2013/Fig_3.14-7/fig3_14-7/traffic/Traffic.mxd (02/03/14) SS

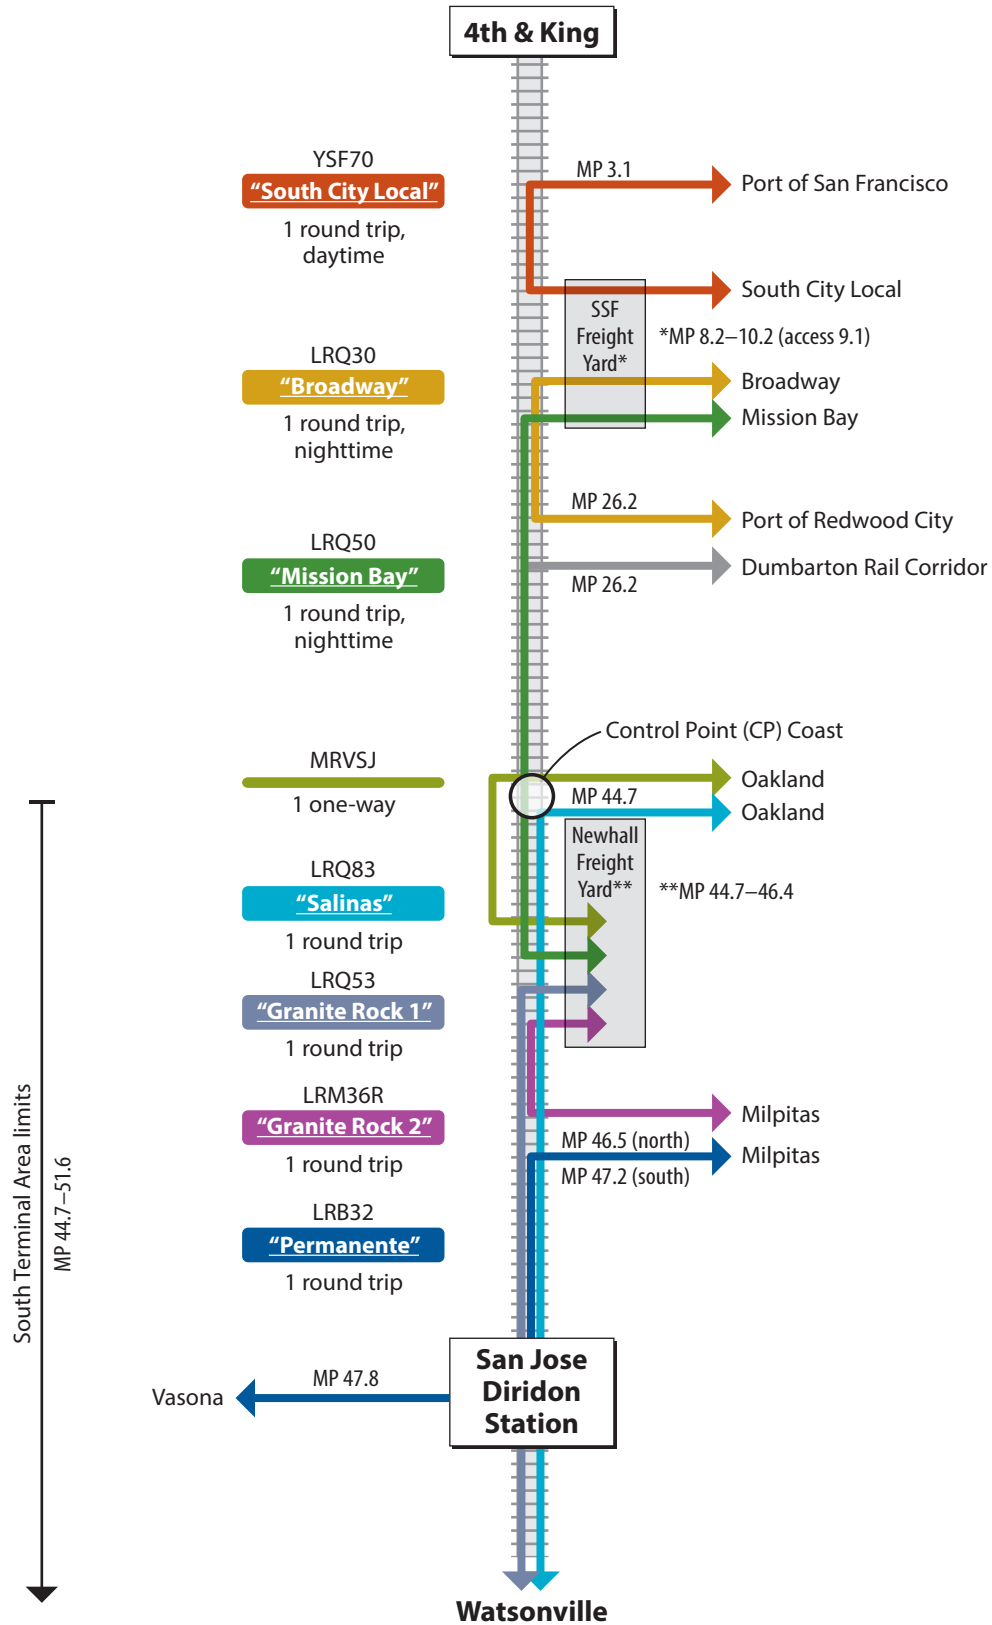

NOT TO SCALE

Figure 3.14-7
Existing Freight, October–December 2012
Peninsula Corridor Electrification Project

1 Due to a concern about potential height clearance requirements with the installation of the OCS,
 2 Caltrain also reviewed dispatch data for the past 8 years to identify the highest freight car (or
 3 “load”) that had been authorized on the Caltrain corridor. Table 3.14-12 shows that data for the
 4 existing maximum freight heights that have operated in the corridor.

5 **Table 3.14-12. Historic Freight Heights at Constrained Locations along the Caltrain ROW**

Location	Historic Load (feet)
MP 1.29 Mariposa Street	15.92
MP 1.33 Tunnel 1	15.92
MP 1.72 22 nd Street	15.92
MP 1.90 23 rd Street	15.92
MP 1.93 Tunnel 2	15.92
MP 3.13 Oakdale Ave. OH	17.08
MP 3.19 Tunnel 3	17.08
MP 4.15 Paul Avenue	17.08
MP 4.27 Tunnel 4	17.08
MP 8.60 Oyster Point Parkway	18.92
MP 29.69 San Francisquito Bridge	18.92
MP 36.50 State Highway 85	18.92
MP 40.75 Lawrence Expressway	18.92
MP 46.15 Hedding Avenue	20.25
MP 47.89 San Carlos Avenue	20.25
MP 50.59 Curtner Avenue	20.25
MP 51.08 Private Overpass	20.25

Source: Caltrain dispatch data, 2006–2013

6

7 **Trackage Rights Agreement between the JPB and Union Pacific**

8 When the JPB acquired the Caltrain Corridor, the JPB and the predecessor to Union Pacific agreed to
 9 a Trackage Rights Agreement (TRA) which established the rights of each of the parties relative to the
 10 corridor. The TRA was negotiated between the JPB and Union Pacific's predecessor in interest,
 11 Southern Pacific Transportation Company, in 1991, with the understanding and expectation that
 12 passenger service would increase over time and could ultimately restrict freight operations. The
 13 TRA was filed with the Interstate Commerce Commission (predecessor of the Surface
 14 Transportation Board) as part of an approval process. Over time, passenger service has increased
 15 steadily due, in part, to significant public investment in the corridor. Since 1991, substantial capital
 16 investments in the corridor have been made by the JPB, including track improvements, station
 17 improvements, technology enhancements, and grade separations, all as required to support
 18 expansion of passenger service as contemplated by the TRA.

19 Several key requirements of the TRA are noted below:

- 1 • The JPB owns the right of way, known as the Peninsula Main Line and associated tracks between
2 San Francisco and a point 2 miles south of Tamien Station, and controls the commuter passenger
3 rail rights.
- 4 • The Union Pacific owns certain tracks along the corridor including the track referred to as “MT-
5 1” from Santa Clara southward (also referred to as the “New Coast Main” and the “Santa
6 Clara/Lick” line).
- 7 • The Union Pacific owns the freight rights and the intercity passenger rail rights.
- 8 • The TRA establishes required vertical clearance heights at specific constrained locations along
9 the corridor.
- 10 • The TRA requires the JPB to allow for one daytime 30 minute freight window between 10 a.m.
11 and 3 p.m. but the freight trains must operate at “Commuter Service Train Speeds” (which
12 means up to 79 mph). The TRA also requires the JPB to provide for one track for exclusive
13 freight use between midnight and 5 p.m.⁴
- 14 • Section 8.3(c) of the TRA recognizes that in the event that the JPB has a need to construct a
15 transportation system that is a significant change in the method of delivery of commuter service
16 that is incompatible with freight service, the JPB can file for permission from the Interstate
17 Commerce Commission (now the Surface Transportation Board) to abandon freight service over
18 the affected area and Union Pacific is not allowed to object or oppose such a filing.

19 3.14.2 Impact Analysis

20 3.14.2.1 Methods for Analysis

21 Construction impact analysis is based on evaluation of the Proposed Project’s effects during
22 construction on the existing transportation and traffic conditions described above.

23 The analysis year for the operational impact analysis is 2020. As described in Chapter 2, *Project*
24 *Description*, the Proposed Project’s construction and testing is expected to be complete in 2020
25 2019. Although electrified service is planned to start in 2019, and thus 2020 was chosen for the
26 impact analysis because it would represent a full year of project operation. In addition, 2020 is a
27 year that lines up with well with other regional transportation analyses.

28 This section provides a comparison of with-project conditions in 2020 with the conditions with the
29 No Project scenario as the operational baseline for the purposes of CEQA, because the Proposed
30 Project can only have operational impacts once the new electrified service is actually operating.
31 Although State CEQA Guidelines specify that the baseline should “normally” be the existing
32 conditions extant at the time of preparation of the environmental document, the existing (2013)
33 conditions are not the conditions that would be affected by operation of the Proposed Project. Thus,
34 it would be fundamentally misleading to the public and decision-makers to measure the Proposed
35 Project’s impact by comparing 2020 with-project conditions with 2013 existing conditions. This
36 section does disclose the existing conditions so that the reader may understand the changes that will

⁴ It should be noted that freight operates at other times than discussed in the TRA, such as in the early evening.
While the JPB permits such activity, the TRA does not require the JPB to provide for freight operations on the JPB-
owned tracks except in relation to the single daytime window and midnight to 5 a.m.

1 occur relative to transportation and traffic both with and without the Proposed Project in 2020. All
2 of the assumptions about 2020 conditions are documented in Appendix D, *Transportation Analysis*,
3 and Appendix I, *Ridership Technical Memorandum*, and are based on regionally adopted assumptions
4 about future land use growth and transportation network development.

5 An analysis was also conducted for conditions with and without the Proposed Project in 2040. The
6 results of this analysis are presented in Section 4.1, *Cumulative Impacts*, because the 2040
7 conditions reflect an extensive amount of land use growth as well as projected transportation
8 improvement completions over the next 26 years.

9 A more detailed description of the impact analysis for all subject areas other than freight service is
10 provided in Appendix D, *Transportation Analysis*. A more detailed description of the system
11 ridership modelling is provided in Appendix I.

12 **Traffic and Roadway Systems**

13 **Analysis Scenarios**

14 Proposed Project operation impacts on transportation and transit systems in the study area are
15 evaluated for the following scenarios.

16 ***2020 No Project Scenario***

17 This scenario reflects regional land use growth, population and employment growth, future transit
18 connections, future transportation improvements, and Caltrain operations that are projected to
19 occur in the study area by 2020 without the Proposed Project. These projected land use growth,
20 transportation projects, and transit services are reflected in the travel demand forecasting model
21 used to predict the future transit ridership and roadway traffic for the 2020 No Project condition.

22 ***Land Use Growth and Transportation System Changes***

23 The VTA travel demand forecasting model was updated to reflect the 2013 conditions and adjusted
24 and validated to reflect 2013 Caltrain system ridership (refers to VTA model thereafter). The model
25 networks were also updated to reflect the current transit and highway networks. After the model
26 was validated to the 2013 conditions, the projected land use growth and transit and transportation
27 improvements by 2020 were input into the model and used to predict the future transit ridership
28 and roadway traffic in 2020, which were then used to evaluate the Proposed Project's impacts on
29 transit and transportation systems.

30 Land use projections contained in the ABAG SCS, prepared in September 2012, were used to develop
31 the ridership and regional travel demand forecasts. Overall, the Caltrain service area is projected to
32 experience significant growth in households, population, and jobs, with fairly balanced levels of
33 growth spread out between the three counties in the study area.

34 Transportation and transit projects as defined in the *Plan Bay Area* regional transportation plan,
35 adopted in mid-2013, were used to code in background improvements in the model networks. MTC
36 provided the years of opening for the projects identified in *Plan Bay Area*. The background highway
37 and transit projects that were planned to open by year 2020 are included in the 2020 model. The
38 transportation projects include projects in the study area as well as key projects a regional traveler
39 would consider transferring to in order to complete an inter-regional trip in the study area. For a list

1 of projects reflected in the travel demand forecasting model, see the ridership technical
2 memorandum in Appendix I.

3 *Caltrain Operations*

4 The 2020 No Project scenario is mostly identical to existing Caltrain operations in terms of schedule
5 and frequency. The 2020 No Project scenario presumes continued diesel-hauled trains. No
6 additional trains are assumed to be added by 2020. The two main changes from existing conditions
7 are included as part of the 2020 No Project scenario.

- 8 ● Relocation of San Bruno Station. As part of a grade-separation project currently under
9 construction, the San Bruno Station will be moved from its current location at 297 Huntington
10 Avenue to the corner of San Bruno and Huntington Avenue in 2014. The station relocation
11 would not affect the schedule or frequency of trains at this station.
- 12 ● Implementation of Caltrain Communications Based Overlay Signal System (CBOSS) Positive
13 Train Control (PTC) advanced signal system. Currently being installed and scheduled to be
14 operational by 2015, the CBOSS PTC system would increase safety both on the tracks and at at-
15 grade crossings and improve reliability and operating performance of the current signal system.
16 Travelers crossing the tracks via car, bike, or on foot would benefit from reduced gate-down
17 times at select crossings and improved local traffic circulation. The CBOSS PTC system will be
18 interoperable with all rail services operating on the same tracks, including freight (Caltrain
19 2013a).

20 **2020 Project Scenario**

21 This scenario reflects 2020 land use growth and transportation system changes combined with the
22 Proposed Project.

23 *Land Use Growth and Transportation System Changes*

24 The projected land use growth and the proposed transit and transportation improvements used to
25 develop the 2020 travel demand forecasting model for this scenario are the same as those used for
26 the 2020 No Project condition.

27 *Caltrain Operations*

28 The 2020 Project scenario includes the following changes from existing conditions that would result
29 in an increase in Caltrain capacity and operating performance.

- 30 ● Conversion of Caltrain from diesel-hauled trains to electric multiple unit (EMU) trains for
31 approximately 75 percent of the service⁵ between the 4th and King Street Station in San
32 Francisco and the Tamien Station in San Jose.
- 33 ● Operation of up to six Caltrain trains per peak hour, per direction at operating speeds of up to 79
34 mph.
- 35 ● Implementation of CBOSS PTC advanced signal system.

⁵ As noted in Chapter 2, *Project Description*, the remaining 25 percent would be diesel-hauled.

1 EMU trains are more efficient than the current diesel-powered locomotives because they can
2 accelerate and decelerate faster than diesel-hauled vehicles⁶. As a result, EMUs would provide faster
3 and/or more frequent service to more stations and, by extension, carry more passengers. The CBOSS
4 PTC system, combined with the EMU fleet, would improve headways and operation flexibility by
5 allowing trains to safely travel closer together along the ROW. This would translate to more frequent
6 and dependable passenger service.

7 The 2020 Project scenario assumes an electrified rail corridor with the CBOSS PTC system.
8 Combined, these two improvements would allow for substantial capacity and operating
9 performance improvements for all service types (Baby Bullets, Limited, and Local trains). The
10 number of daily weekday trains would increase from the current 92 to 114.

11 Table 3.14-13 summarizes the average weekday trains per day, by station, for the 2020 No Project
12 and 2020 Project scenarios. Under the 2020 Project scenario, the total number of daily trains
13 serving each station would increase across the study area, with the exception of College Park, which
14 Caltrain would continue to serve with four trains daily. Two stations that do not have weekday
15 service in existing conditions and in the 2020 No Project scenario would have weekday service in
16 the 2020 Project condition: Broadway and Atherton. It should be noted that the proposed trains are
17 based on a prospective 2020 schedule that was developed only for analytical purposes for this EIR.
18 Although the schedule has yet been finalized, it is the best available data to be used for identifying
19 the potential traffic operation impact of the Proposed Project. The actual schedule may vary, which
20 could influence the number of station trains at some stations.

21 **Caltrain Ridership, Mode of Access, and Mode of Egress Models**

22 Ridership forecasting provides estimates of the total number of passengers that would ride Caltrain
23 as a result of the Proposed Project. The forecasting also provides information on how access to
24 individual stations along the Caltrain corridor would change in the future.

25 VTA develops and maintains a travel forecasting model for Santa Clara and San Mateo Counties,
26 along with adjacent travel markets. The model estimates trips throughout the metropolitan area by
27 various modes, including Caltrain and access-modes to Caltrain. The model is sensitive to multiple
28 factors including population and employment densities, auto ownership rates, demographics (e.g.,
29 age, income level, household size), and transit network connections. Citywide growth within the
30 VTA travel demand model generally matches ABAG growth forecasts as included in the Plan Bay
31 Area. Ridership projections for transit systems that are assumed to connect to Caltrain in years 2020
32 are from the VTA model. However, because the model's scope is regional, it is not able to capture all
33 of the details of extremely localized conditions at the station-level.

34 Caltrain has developed a calibration process that adjusts the VTA model outputs using factors found
35 to be correlated to Caltrain station level ridership as well variables for which the model might be
36 over- or undercompensating. For purposes of this study, calibration was performed for all stations
37 providing service all day during weekdays within the study area.

⁶ See Chapter 5 for comparison of performance of EMUs vs. non-electrification alternatives using newer Tier 4 diesel locomotives, diesel multiple units, and dual-mode multiple units.

1 **Table 3.14-13. Average Weekday Daily Trains by Station with Prototypical Schedule**

Station	Existing, 2020 No Project Scenario	2020 Project Scenario	Change with Project
4th and King	92	114	+22
22nd Street	58	90	+42
Bayshore	40	66	+26
South San Francisco	46	78	+32
San Bruno	56	66	+10
Millbrae	82	114	+32
Broadway	0	54	+54
Burlingame	58	66	+8
San Mateo	70	96	+26
Hayward Park	40	66	+26
Hillsdale	74	102	+28
Belmont	46	66	+20
San Carlos	64	78	+14
Redwood City	72	102	+30
Atherton	0	54	+54
Menlo Park	66	96	+30
Palo Alto	86	108	+22
California Avenue	52	66	+14
San Antonio	46	66	+20
Mountain View	80	108	+28
Sunnyvale	62	84	+22
Lawrence	56	66	+10
Santa Clara	58	66	+8
College Park	4	4	No change
San Jose Diridon	92	114	+22
Tamien	40	48	+8

Note: Based on prototypical schedule.

Source: Appendix D, *Transportation Analysis*

2
3 Fehr & Peers also developed the mode of access and mode of egress models to estimate access and
4 egress mode shares to Caltrain stations. Using intercept passenger surveys conducted in 2013, the
5 models estimate the actual proportions of riders accessing and egressing by auto (park-and-ride,
6 kiss-and-ride), transit, walking, and bicycling.

7 **Regional and City Vehicle Miles Traveled**

8 A performance measure used to quantify the amount of vehicle travel is vehicle miles traveled
9 (VMT). VMT measures the amount of miles vehicles travel along over roadway networks. VMT
10 measurement has one primary limitation: it is not directly observed and, therefore, cannot be
11 directly measured. It is calculated based on the number of vehicles multiplied by the distance
12 traveled by each vehicle. The amount of VMT can be obtained through extensive surveys of

1 residents, visitors, and employees, or by using a validated travel demand forecasting model that
2 estimates vehicle demand. VMT estimates derived from the models are dependent on the level of
3 detail in the network and other variables related to vehicle movement through the network. The
4 traffic volume and distance traveled depends on land use types, density and intensity, and patterns
5 as well as the supporting transportation system. The VTA model was used to provide the regional
6 and city by city VMT estimates for analysis scenarios.

7 **Intersection Levels of Service Analysis**

8 Traffic operations at all ~~82~~ 91 select intersections in the study area were analyzed under the 2020
9 No Project scenario and the 2020 Project scenario. To obtain the level of service and the delay, the
10 existing peak hour traffic microsimulation models (VISSIM and SimTraffic) were updated to reflect
11 future peak hour operating conditions. This included updates to forecasted traffic volumes, signal
12 timings, gate-down times, and frequencies of Caltrain at at-grade crossings.

13 **Transit Systems**

14 The potential impact of the Proposed Project on other transit systems was evaluated using the VTA
15 model of system ridership with and without the Proposed Project using the same 2020 scenarios
16 described above for traffic and roadway systems. The development and assumptions of the system
17 ridership model are discussed in greater detail in Appendix I, *Ridership Technical Memorandum*.

18 **Bicycle and Pedestrian Systems**

19 The potential impact of the Proposed Project on bicycle and pedestrian systems was evaluated
20 based on the profile and functionality of the existing systems and the physical changes that would
21 occur under Proposed Project conditions.

22 **Emergency Vehicle Access**

23 The potential impact of the Proposed Project on emergency vehicle access was evaluated based on a
24 comparison of the changes to roadway facilities and operations with and without the Proposed
25 Project.

26 **Caltrain Station Parking and Access**

27 To forecast parking demand, first, forecasts for daily boardings per station per scenario were
28 generated by the calibrated ridership model. The ratio of 2013 boardings occurring before noon to
29 daily boardings was applied to the daily boardings forecasts to generate forecasts for boardings
30 occurring before noon by station in future scenarios. To forecast the number of Caltrain riders
31 arriving to the station and parking before noon by station and scenario, the park-and-ride access
32 mode from the AM mode of access model was then applied to the forecasts of boardings occurring
33 before noon. An average vehicle occupancy rate of 1.1 was applied to these values to forecast vehicle
34 parking demand per station and scenario.

35 As confirmed by the intercept surveys, not all Caltrain park-and-rider passengers park in Caltrain
36 lots; some park on-street or in non-Caltrain lots. For most stations, however, the majority of park-
37 and-ride passengers parked in a Caltrain lot. Therefore, it was assumed that, generally, park-and-
38 ride demand generated by the Proposed Project would be met a Caltrain lot if space was available.

1 However, for seven stations (Bayshore, San Bruno, Millbrae, Hayward Park, San Carlos, Menlo Park,
2 and Lawrence) the intercept survey found that at least two-thirds of park-and-ride passengers
3 parked on street or in non-Caltrain parking lots, even though the Caltrain lots had ample available
4 parking. Therefore, for those seven stations, the proportion of park-and-ride passengers parking in a
5 Caltrain lot was assumed to be the same as the proportion recorded from the intercept survey.

6 Impacts of the Proposed Project on station access were evaluated by identifying whether project
7 operations would have any effect on routes of access to the Caltrain stations.

8 **Freight Rail Service**

9 The potential impact of the Proposed Project on freight service was evaluated based on
10 consideration of the impacts of potential changes in freight service operational hours and overhead
11 height clearances with the project area.

12 **3.14.2.2 Thresholds of Significance**

13 The State CEQA Guidelines Appendix G (14 CCR 15000 et seq.) identifies significance criteria that
14 lead agencies may consider for determining whether a project could have significant impacts on
15 existing transportation and circulation. Pursuant to the CEQA Guidelines Appendix G, a project
16 impact would be considered significant if construction or operation of the Proposed Project would
17 cause any of the following conditions.

- 18 ● Conflict with an applicable plan, ordinance, or policy establishing measures of effectiveness for
19 the performance of the circulation system, taking into account all modes of transportation
20 including mass transit and nonmotorized travel and relevant components of the circulation
21 system, including but not limited to intersections, streets, highways and freeways, pedestrian
22 and bicycle paths, and mass transit.
- 23 ● Conflict with an applicable Congestion Management Plan, including, but not limited to, LOS
24 standards and travel demand measures, or other standards established by the county
25 congestion management agency for designated roads or highways.
- 26 ● Substantially increase hazards because of a design feature (e.g., sharp curves or dangerous
27 intersections) or incompatible uses (e.g., farm equipment).
- 28 ● Result in inadequate emergency access.
- 29 ● Conflict with adopted policies, plans, or programs regarding public transit, bicycle, or pedestrian
30 facilities, or that otherwise decrease the performance or safety of such facilities.
- 31 ● Result in a change in air traffic patterns, including either an increase in traffic levels or a change
32 in location that results in substantial safety risks.

33 The CEQA Guidelines are intended to provide general guidance for lead agencies evaluating impacts
34 on the transportation system. The criteria for determining project impacts were identified by
35 Caltrain based on consideration of the applicable policies, regulations, and guidelines defined by the
36 Caltrain and local jurisdictions and by consideration of the CEQA Guidelines.

37 The significance criteria used in this EIR for the transportation and traffic impact analysis are as
38 follows:

1 Overall Project

2 For the overall project, the Proposed Project's impact is considered significant if it results any of the
3 following conditions.

- 4 ● The Proposed Project would result in an increase in VMT per service population in the study
5 area (e.g., San Francisco, San Mateo and Santa Clara Counties).
- 6 ● The Proposed Project would interfere with, conflict with, or preclude other planned
7 improvements such as transit projects, roadway extensions/expansions, and pedestrian or
8 bicycle facility improvements.
- 9 ● The Proposed Project would conflict or create inconsistencies with adopted regional
10 transportation plans.
- 11 ● The Proposed Project would result in unsafe access between Caltrain stations and adjacent
12 streets.

13 The specific subject criteria by which to evaluate these broad general criteria are explained in the
14 sections below.

15 Traffic and Roadway System

16 The Proposed Project would create a significant impact on the traffic and roadway system if any of
17 the following criteria are met or exceeded:

- 18 ● The project conflicts or creates inconsistencies with local traffic plans.
- 19 ● The project substantially disrupts existing traffic operations, as defined below:
 - 20 For signalized intersections, the significance criteria are based on the typical average criteria for
21 jurisdictions along the Caltrain corridor. Specifically, a significant project impact to a signalized
22 intersection occurs if the project results in one of the following conditions:
 - 23 ○ The project causes an intersection to deteriorate from LOS D or better to LOS E or F, or
 - 24 ○ The project causes an intersection operating at LOS E or F under baseline (no project)
25 conditions to increase in overall delay by 4 seconds or more.
 - 26 The above criteria apply to all signalized intersections except where a jurisdiction has adopted
27 criteria permitting higher levels of congestion in certain areas or at certain intersections, in
28 which case these criteria are used.
 - 29 For stop-controlled intersections, the significance criteria are defined to occur if the project
30 results in both of the following conditions:
 - 31 ○ The project results in a change from LOS A–E to LOS F conditions for the worst case
32 movement, and
 - 33 ○ The intersection satisfies one or more traffic signal warrants.
 - 34 ● The project creates a temporary but prolonged impact due to lane closures, need for temporary
35 signals, emergency vehicle access, traffic hazards to bikes/pedestrians, damage to roadbed, or
36 truck traffic on roadways not designated as truck routes.

1 Transit System

2 The project would create a significant impact related to transit service if any of the following criteria
3 are met or exceeded:

- 4 • The project creates demand for public transit services above the capacity which is provided, or
5 planned.
- 6 • The project disrupts existing transit services or facilities.
- 7 • The project interferes with planned transit services or facilities.
- 8 • The project conflicts or creates inconsistencies with adopted transit system plans, guidelines,
9 policies, or standards.

10 The project substantially increase hazards for transit systems because of a design feature or
11 otherwise substantially compromises the safety of transit facilities.

12 Pedestrian System

13 The project would create a significant impact related to the pedestrian system if any of the following
14 criteria are met or exceeded:

- 15 • The project disrupts existing pedestrian facilities.
- 16 • The project interferes with planned pedestrian facilities.
- 17 • The project conflicts or creates inconsistencies with adopted pedestrian system plans,
18 guidelines, policies, or standards.

19 Bicycle System

20 The project would create a significant impact related to facilities if any of the following criteria are
21 met or exceeded:

- 22 • The project substantially disrupts existing bicycle facilities.
- 23 • The project substantially interferes with planned bicycle facilities.
- 24 • The project conflicts or creates substantial inconsistencies with adopted bicycle system plans.

25 Emergency Vehicles

26 The project would create a significant impact if the following criteria is met or exceeded:

- 27 • The project results in inadequate emergency vehicle circulation and/or access.

28 Station Vehicle Parking and Access

29 The project would create a significant impact if either of the following criteria is met or exceeded:

- 30 • The project does not meet Caltrain's *Comprehensive Access Program Policy Statement* or *Bicycle
31 Access and Parking Plan*.
- 32 • The project would result in the construction of off-site parking facilities that would have
33 secondary physical impacts on the environment.

1 **Freight Rail Service**

2 The project would create a significant impact if the following criteria is met or exceeded:

- 3 • The project results in a change in freight rail service such that resultant diversions to truck or
- 4 other freight modes would result in significant secondary impacts related to air quality, noise,
- 5 greenhouse gas emissions, or traffic operation (as defined by the other applicable significance
- 6 criteria in this EIR).

7 **3.14.2.3 Impacts and Mitigation Measures**

8 None of the Project Variants described in Chapter 2, *Project Description*, would result in any changes
 9 to the impact analyses presented below.

10 **Roadway Traffic Operations**

Impact TRA-1a	Substantially disrupts existing or future traffic operations during construction
Level of Impact	Significant
Mitigation Measure	TRA-1a: Implement construction road Traffic Control Plan
Level of Impact after Mitigation	Less than significant

11 Construction activities for the Proposed Project would consist of the installation of OCS poles and
 12 wires, erection of overbridge protection barriers on roadway bridges that cross the Caltrain
 13 alignment, and the construction of traction power facilities (TPFs), specifically, traction power
 14 substations (TPSS), paralleling stations and the switching station. Most of the construction activities
 15 would be contained within specific work sites or within the Caltrain ROW. Although construction
 16 would temporarily increase trucks and employee vehicles on public roadways accessing the work
 17 sites, the impact from increase trips on roadway traffic operation would be minimal. However, the
 18 following construction activities could require temporary closures of travel lanes or road segments,
 19 which would reduce the vehicle capacity of the roadway segments, disrupt the traffic flow, and
 20 potentially increase vehicle delays on the roadway segments.

- 21 • Installation of OCS wires may require lane or road closures at at-grade crossing when the wires
 22 are installed across the roads.
- 23 • Installation of overbridge protection barriers may require one-lane closures on the side of the
 24 road the barriers are installed.
- 25 • Installation of the transmission line or underground conduit between the PG&E substations and
 26 the TPS and between the TPS and the Caltrain ROW or utility relocations may require lane or
 27 road closures when the work is conducted across public roadways.

28 Although the closures, where required, would be short-term, the construction impact on traffic
 29 operation is considered significant. Implementation of Mitigation Measure TRA-1a would reduce the
 30 temporary construction impact on roadway traffic to a less-than-significant level.

1 **Mitigation Measure TRA-1a: Implement construction road Traffic Control Plan**

2 The JPB would coordinate with the traffic departments of local jurisdictions and with all
3 corridor emergency service providers to develop a Traffic Control Plan consistent with the
4 Caltrans *Manual on Uniform Traffic Control Devices*⁷ to mitigate construction impacts on transit
5 service, roadway operations, emergency responses, pedestrian and bicycle facilities, and public
6 safety. Measures that will be implemented throughout the course of project construction, will
7 include, but not limited to, the following:

- 8 ● Maintain acceptable response times and performance objectives for emergency response
9 services.
- 10 ● Limit number of simultaneous street closures and consequent detours of transit and
11 vehicular traffic within each immediate vicinity, with closure time frame limited as much as
12 feasible for each closure, unless alternative traffic routings are available.
- 13 ● Implement traffic control measures to minimize traffic conflicts and delays to the traveling
14 public for local roadways where lane closures and restricted travel speeds will be required
15 for longer periods.
- 16 ● Provide advance notice of all construction-related street closures, durations, and detours to
17 local jurisdictions, emergency service providers, and motorists.
- 18 ● Provide safety measures for vehicles, bicyclists and pedestrians to transit through
19 construction zones safely.
- 20 ● Limit sidewalk, bicycle, and pedestrian walkway closures to one location within each
21 vicinity at a time, with a closure time frame limited as much as feasible for each closure
22 unless alternative routings for pedestrian and bicycle transit are available.
- 23 ● Provide designated areas for construction worker parking wherever feasible to minimize
24 use of parking in residential or business areas.
- 25 ● Coordinate any construction effects to parking at the San Jose Diridon Station and at other
26 areas used for SAP Center Parking with the City of San Jose and SAP Center representatives
27 to minimize disruption of event parking.
- 28 ● If necessary, a Maintenance of Traffic Plan and/or a Traffic Management Plan would be
29 established in accordance with Caltrans' *Manual on Uniform Traffic Control Devices*.

Impact TRA-1b	Conflicts or creates inconsistencies with regional traffic plans or substantially disrupts future regional traffic operations from Proposed Project operation
Level of Impact	Less than significant

30 Transportation is a major contributor to GHG emissions and a direct result of population and
31 employment growth, which generates vehicle trips to move goods, provide public services, and
32 connect people with work, school, shopping, and other activities. Growth in travel (especially vehicle
33 travel) is due in large part to changes in urban development patterns (i.e., the built environment).
34 VMT measures the amount of miles vehicles travel on roadway networks.

⁷ "California Manual on Uniform Traffic Control Devices." Caltrans. 2012.
<<http://www.dot.ca.gov/hq/traffops/engineering/mutcd/index.htm>>

1 Because the Proposed Project would shift travel demand from driving trips to transit trips and
 2 reduce the regional vehicle traffic and VMT on major highways and arterials in the study area, the
 3 Proposed Project would not substantially disrupt future regional traffic operations. In addition,
 4 many adopted regional transportation plans take into consideration the electrification of the
 5 Caltrain system when developing their respective plans. In the *Plan Bay Area*, MTC identifies the
 6 electrification of the Caltrain system as one of the major transit project expected for the future;
 7 therefore, the Proposed Project would not conflict or create inconsistencies with regional traffic
 8 plans.

9 Overall, as summarized in Table 3.14-14, regional VMT is expected to increase between 2013 and
 10 2020. However, regional VMT in the peak and off-peak periods would be less under the 2020 Project
 11 scenario compared with the 2020 No Project scenario. Total daily VMT under the 2020 Project
 12 scenario is projected to decrease by approximately 235,000 miles compared with the 2020 No
 13 Project scenario

14 **Table 3.14-14. Average Regional Daily Vehicle Miles Traveled**

Scenario	Vehicle Miles Traveled		
	Peak Hours	Off-Peak Hours	Daily Total
Existing Condition	96,261,904	82,400,965	178,662,869
	<u>96,260,000</u>	<u>82,401,000</u>	<u>178,660,000</u>
2020 No Project	104,704,796	90,671,307	195,376,103
	<u>104,705,000</u>	<u>90,669,000</u>	<u>195,375,000</u>
2020 Project	104,517,191	90,624,331	195,141,522
	<u>104,518,000</u>	<u>90,625,000</u>	<u>195,141,000</u>

Source: Appendix D, *Transportation Analysis*.

15
 16 While certain locations near the stations or on the Caltrain corridor may experience increases in
 17 traffic due to more automobiles driving to and from stations (see discussion below under Impact
 18 TRA-1c), numerous roadways along the Caltrain corridor would see reduced traffic volumes as a
 19 result of the Proposed Project. In particular, major arterials, such as El Camino Real, SR 84, SR 92, I-
 20 280, and US 101 and other roadways, would see reductions in overall vehicle traffic, as the Proposed
 21 Project would shift travel demand from driving trips to transit trips.

22 Table 3.14-15 displays daily VMT within each city for 2020 No Project and 2020 Project scenarios.
 23 City-level VMT is calculated by accounting for the total mileage of all vehicle trips within each city's
 24 boundaries, which known as the "boundary method" calculation.

25 Daily VMT in all cities along the corridor would decrease under the 2020 Project scenario compared
 26 with the 2020 No Project scenario. Total daily VMT under the 2020 Project scenario is projected to
 27 decrease by an average of ~~1.8~~ 0.9 percent in all cities along the corridor compared with the 2020 No
 28 Project scenario.

29 While certain locations on the Caltrain corridor may experience increases in traffic due to more
 30 automobiles driving to and from stations, the total effect is that total VMT in each city would
 31 decrease because of the Proposed Project.

1 Thus, the Proposed Project would have a beneficial impact on regional and city-level traffic overall
 2 by reducing vehicle miles traveled. Impact TRA-1c analyzes localized traffic impacts.

3 **Table 3.14-15. Weekday Daily Regional Vehicle Miles Traveled within Each City, 2020 Scenario**

City	2020 No Project			2020 Project		
	Peak ^a	Off-Peak ^b	All	Peak ^a	Off-Peak ^b	All
San Francisco	4,153,000	3,526,000	7,680,000	4,141,000	3,497,000	7,638,000
<u>Brisbane</u>	<u>431,000</u>	<u>397,000</u>	<u>827,000</u>	<u>428,000</u>	<u>395,000</u>	<u>823,000</u>
South San Francisco	700,000	574,000	1,275,000	695,000	506,000	1,200,000
San Bruno	499,000	363,000	862,000	496,000	360,000	856,000
Millbrae	210,000	164,000	374,000	209,000	136,000	344,000
Burlingame	480,000	427,000	906,000	476,000	422,000	898,000
San Mateo	1,260,000	1,114,000	2,374,000	1,252,000	1,101,000	2,354,000
Belmont	165,000	120,000	285,000	163,000	119,000	282,000
San Carlos	701,000 <u>317,000</u>	263,000	963,000 <u>579,000</u>	315,000	260,000	574,000
Redwood City	785,000	712,000	1,497,000	780,000	703,000	1,483,000
Atherton	65,000	38,000	104,000	65,000	38,000	103,000
Menlo Park	636,000	611,000	1,247,000	632,000	602,000	1,234,000
Palo Alto	800,000	664,000	1,464,000	795,000	657,000	1,451,000
Mountain View	1,006,000	872,000	1,878,000	1,002,000	865,000	1,867,000
Sunnyvale	1,379,000	1,099,000	2,478,000	1,372,000	1,077,000	2,449,000
Santa Clara	1,199,000	753,000	1,952,000	1,193,000	747,000	1,940,000
San Jose	9,722,000	7,750,000	17,473,000	9,705,000	7,673,000	17,378,000
TOTAL	23,760,000 <u>23,807,000</u>	19,050,000 <u>19,447,000</u>	42,812,000 <u>43,255,000</u>	23,291,000 <u>23,719,000</u>	18,763,000 <u>19,158,000</u>	42,051,000 <u>42,874,000</u>

Source: Appendix D, *Transportation Analysis*.

^a Peak travel is defined as travel occurring from 5:00 a.m. to 9:00 a.m. and from 3:00 p.m. to 7:00 p.m.

^b Off-peak travel is defined as travel occurring from 9:00 a.m. to 3:00 p.m. and from 7:00 p.m. to 5:00 a.m.

4

Impact TRA-1c	Conflicts or creates inconsistencies with local traffic plans or substantially disrupts future local traffic operations from Proposed Project operation in 2020
Level of Impact	Significant
Mitigation Measure	TRA-1c: Implement signal optimization and roadway geometry improvements at impacted intersections for the 2020 Project Condition
Level of Impact after Mitigation	Significant and unavoidable

5 Although the Proposed Project would reduce regional vehicle miles travelled, the Proposed Project
 6 would also affect local traffic operations along the Caltrain corridor in several ways. First, the
 7 number of trains would increase, increasing the number of gate down occurrences relative to the No
 8 Project scenario. Second, the increased train service and added train capacity would change traffic
 9 patterns resulting in potential increases in traffic near stations coupled with reduced traffic on
 10 parallel roads.

1 For the study at-grade crossing intersections overall, the average gate-down time per event is
 2 reduced at many crossings under the Project scenario compared with the No Project scenario in
 3 2020. However, the increase in the number of trains is expected to result in an increase in the
 4 aggregate gate-down time over the peak hour at 14 locations compared with the No Project scenario
 5 in 2020 at grade crossings near study locations. Gate-down time during the peak hour would
 6 improve relative to the No Project scenario at seven locations. Gate-down time during the peak hour
 7 would be higher in one peak hour and lower in the other peak hour compared with the No Project
 8 scenario at 10 eight locations (for example at the Villa Terrace at-grade crossing in San Mateo, the
 9 Proposed Project would have less gate-down time in the AM peak hour, but more gate-down time in
 10 the PM peak hour compared with the No Project scenario).

11 The increase in number of gate-down events, along with increasing the number of corresponding
 12 signal preemption events, may degrade intersection operations even though the gate-down time per
 13 event is lower. The peak hour intersection results (level of service and average vehicle delay) for the
 14 2020 No Project and 2020 Project scenarios are presented in Table 3.14-16.

15 **Table 3.14-16. Intersection Delay and Levels of Service, 2020 No Project and 2020 Project Alternatives**

16 (Intersections added after the Draft EIR are shown in italics to avoid confusion with prior formatting for
 17 showing significant impacts which uses underline).

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	2020 No Project Delay ^b	2020 No Project LOS ^c	2020 Project Delay ^b	2020 Project LOS ^c	Change in Delay
ZONE 1									
<u>1</u>	4th Street & King Street	SF	AM PM	Signal	>120 >120	F F	>120 >120	F F	0 34.2
<u>2</u>	4th Street & Townsend Street	SF	AM PM	Signal	>120 >120	F F	>120 >120	F F	-31.6 35.1
3	Mission Bay Drive & 7th Street	SF	AM PM	Signal	10.1 13.4	B B	10.5 14.3	B B	0.4 0.9
4	Mission Bay Drive & Berry Street	SF	AM PM	Signal	1.9 6.9	A A	1.5 9.8	A A	-0.4 0.9
<u>5</u>	7th Street & 16th Street	SF	AM PM	Signal	90.9 67.7	F E	>120 64.5	F E	29.7 -3.2
6	16th Street & Owens Street	SF	AM PM	Signal	11.3 13.4	B B	11.6 13.7	B B	0.3 0.3
7	22nd Street & Pennsylvania Street	SF	AM PM	All-way Stop	9.2 7.3	A A	9.5 8.4	A A	0.3 1.1
8	22nd Street & Indiana Street	SF	AM PM	All-way Stop	6.1 5.4	A A	5.7 6.0	A A	-0.4 0.6
9	Tunnel Avenue & Blanken Avenue	SF	AM PM	All-way Stop	15.3 39.8	C E	23.1 37.8	C E	7.8 -2.0
10	Linden Avenue & Dollar Avenue	SSF	AM PM	Signal	15.9 40.9	B D	18.0 54.1	B D	2.1 13.2
11	East Grand Avenue & Dubuque Way	SSF	AM PM	Signal	8.9 10.9	A B	10.4 12.3	B B	1.5 1.4
12	S Linden Avenue & San Mateo Avenue	SSF	AM PM	Signal	8.0 8.6	A A	8.0 19.4	A B	0 10.8
13	Scott Street & Herman Street	SB	AM PM	Side-Street Stop	11.3 15.1	A C	9.6 14.6	A B	-1.7 -0.5
14	Scott Street & Montgomery Avenue	SB	AM PM	Side-Street Stop	5.9 6.2	A A	6.4 6.9	A A	0.5 0.7

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	2020 No Project Delay ^b	2020 Project LOS ^c	2020 Project Delay ^b	2020 Project LOS ^c	Change in Delay
15	San Mateo Avenue & San Bruno Avenue	SB	AM PM	Signal	19.9 20.8	B C	21.5 19.1	C C	1.6 -1.7
ZONE 2									
16	El Camino Real & Millbrae Avenue	MB	AM PM	Signal	75.7 85.1	E F	105.4 >120	F F	29.7 53.4
17	Millbrae Avenue & Rollins Road	MB	AM PM	Signal	38.0 58.6	D E	49.4 88.2	D F	11.4 29.6
18	California Drive & Broadway	BG	AM PM	Signal	133.7 157.2	F F	>120 >120	F F	-0.7 6.8
19	Carolan Avenue & Broadway	BG	AM PM	Signal	<u>46.3</u> <u>52.1</u>	<u>D</u> <u>D</u>	<u>26.0</u> <u>52.7</u>	<u>D</u> <u>D</u>	-0.3 <u>0.6</u>
20	California Drive & Oak Grove Avenue	BG	AM PM	Signal	91.3 26.8	F C	53.2 29.9	D C	-38.1 3.1
21	Carolan Avenue & Oak Grove Avenue	BG	AM PM	Side-Street Stop	>120 >120	F F	>120 >120	F F	>60 >60
22	California Drive & North Lane	BG	AM PM	Side-Street Stop	16.3 11.2	C B	15.5 12.9	C B	-0.8 1.7
23	Carolan Avenue & North Lane	BG	AM PM	Side-Street Stop	32.9 13.5	D B	38.5 15.4	E C	5.6 1.9
24	Anita Road & Peninsula Avenue	BG	AM PM	Side-Street Stop	17.2 53.3	C F	14.4 33.4	B D	-2.8 -19.9
83	<i>Broadway and Rollins Road</i>	<i>BG</i>	<i>AM</i> <i>PM</i>	<i>Signal</i>	<i>50.6</i> <i>94.8</i>	<i>D</i> <i>F</i>	<i>50.8</i> <i>96.8</i>	<i>D</i> <i>F</i>	<i>0.2</i> <i>2.0</i>
84	<i>Rollins Road and Cadillac Way</i>	<i>BG</i>	<i>AM</i> <i>PM</i>	<i>Signal</i>	<i>10.1</i> <i>5.7</i>	<i>B</i> <i>A</i>	<i>9.9</i> <i>5.9</i>	<i>A</i> <i>A</i>	<i>-0.2</i> <i>0.2</i>
84a	<i>Broadway and US 101 Southbound Ramps</i>	<i>BG</i>	<i>AM</i> <i>PM</i>	<i>Signal</i>	<i>59.1</i> <i>100.0</i>	<i>E</i> <i>F</i>	<i>49.0</i> <i>85.4</i>	<i>D</i> <i>F</i>	<i>-10.1</i> <i>-14.6</i>
85	<i>Bayswater Avenue and California Drive</i>	<i>BG</i>	<i>AM</i> <i>PM</i>	<i>Signal</i>	<i>11.0</i> <i>11.8</i>	<i>B</i> <i>B</i>	<i>11.1</i> <i>11.7</i>	<i>B</i> <i>B</i>	<i>0.1</i> <i>-0.1</i>
25	Woodside Way & Villa Terrace	SM	AM PM	Side-Street Stop	5.1 5.5	A A	5.2 5.3	A A	0.1 -0.2
26	North San Mateo Drive & Villa Terrace	SM	AM PM	Side-Street Stop	12.0 15.8	B C	11.6 16.0	B C	-0.4 0.2
27	Railroad Avenue & 1st Avenue	SM	AM PM	Side-Street Stop	12.6 17.8	B C	8.9 14.3	A B	-3.7 -3.5
28	South B Street & 1st Avenue	SM	AM PM	Signal	21.6 47.6	C D	16.3 50.8	B D	-5.3 3.2
29	9th Avenue & S Railroad Avenue	SM	AM PM	Side-Street Stop	41.8 41.8	E E	44.5 35.7	E E	2.7 -6.1
30	South B Street & 9th Avenue	SM	AM PM	Signal	15.3 21.8	C C	16.6 18.5	B B	1.3 -3.3
31	Transit Center Way & 1st Avenue	SM	AM PM	Uncontrolled	5.3 12.5	A B	4.2 11.4	A B	-1.1 -1.1
32	Concar Drive & SR 92 Westbound Ramps	SM	AM PM	Signal	7.0 9.2	A A	7.1 18.0	A B	0.1 8.8
33	S Delaware Street & E 25th Avenue	SM	AM PM	Signal	16.4 69.5	B E	15.5 43.2	B D	-0.9 -26.3
34	E 25th Avenue & El Camino Real	SM	AM PM	Signal	34.5 90.6	C F	30.9 82.2	C F	-3.6 -8.4
35	31st Avenue & El Camino Real	SM	AM PM	Signal	21.7 37.9	C D	21.2 44.2	C D	-0.5 6.3
36	E Hillsdale Boulevard & El Camino Real	SM	AM PM	Signal	77.6 49.9	E D	86.6 46.6	F D	9.0 -3.3

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	2020 No Project Delay ^b	Project LOS ^c	2020 Project Delay ^b	Project LOS ^c	Change in Delay
37	E Hillsdale Blvd. & Curtiss Street	SM	AM PM	Signal	30.7 10.8	C B	38.1 10.2	D B	7.4 -0.6
38	Peninsula Avenue & Arundel Road & Woodside Way	SM	AM PM	Side-Street Stop	18.8 54.5	C F	16.8 31.2	C D	-2.0 -23.3
39	El Camino Real & Ralston Avenue	BL	AM PM	Signal	>120 >120	F F	>120 >120	F F	-8.3 1.6
40	El Camino Real & San Carlos Avenue	SC	AM PM	Signal	21.5 67.9	C E	21.9 42.3	C D	0.4 -25.6
41	Maple Street & Main Street ^d	RC	AM PM	Side-Street Stop	39.3 51.5	E F	35.4 31.7	E D	-3.9 -19.8
42	Main Street & Beech Street	RC	AM PM	Side-Street Stop	6.4 12.8	A B	7.9 42.4	A E	1.5 29.6
43	Main Street & Middlefield Road ^d	RC	AM PM	Signal	24.2 >120	C F	25.7 >120	C F	1.5 >60
44	Broadway Street & California Street ^d	RC	AM PM	Side-Street Stop	>120 >120	F F	>120 >120	F F	>-60 >-60
45	El Camino Real & Whipple Avenue	RC	AM PM	Signal	59.0 53.5	E D	48.7 45.2	D D	-10.3 -8.3
46	Arguello Street & Brewster Avenue ^d	RC	AM PM	Signal	36.9 >120	D F	46.6 115.3	D F	9.7 -49.0
47	El Camino Real & Broadway Street ^d	RC	AM PM	Signal	60.6 108.7	E F	58.9 114.1	E F	-1.7 5.4
48	Arguello Street & Marshall Street ^d	RC	AM PM	Signal	47.2 95.7	D F	34.4 82.7	C F	-12.8 -13.0
49	El Camino Real & James Avenue ^d	RC	AM PM	Signal	29.2 79.2	C E	28.8 91.1	C F	-0.4 11.9
ZONE 3									
50	El Camino Real & Fair Oaks Lane	AT	AM PM	Signal	37.1 30.2	D C	40.5 33.5	D C	3.4 3.3
51	El Camino Real & Watkins Avenue	AT	AM PM	Side-street stop	35.3 >120	E F	43.1 >120	E F	7.8 >60
52	Fair Oaks Lane & Middlefield Road	AT	AM PM	Side-Street Stop	>120 >120	F F	>120 77.8	F F	>-60 >-60
53	Watkins Avenue & Middlefield Road	AT	AM PM	Side-Street Stop	52.5 >120	F F	49.5 91.5	F F	-3.1 -30.3
54	Glenwood Avenue & Middlefield Road	AT	AM PM	Side-Street Stop	70.9 >120	F F	≥120 ≥120	F F	50 >60
87	<i>Encinal Avenue and Middlefield Road</i>	<i>AT</i>	<i>AM PM</i>	<i>Signal</i>	<i>21.0</i> <i>15.1</i>	<i>C</i> <i>B</i>	<i>22.7</i> <i>14.2</i>	<i>C</i> <i>B</i>	<i>1.7</i> <i>-0.9</i>
86	<i>Encinal Avenue and El Camino Real</i>	<i>MP</i>	<i>AM PM</i>	<i>Signal</i>	<i>15.0</i> 111.9	<i>B</i> F	<i>16.6</i> 79.1	<i>B</i> E	<i>1.6</i> -32.8
55	El Camino Real & Glenwood Avenue	MP	AM PM	Signal	53.6 72.1	D E	94.6 111.8	F F	41.0 39.7
56	El Camino Real & Oak Grove Avenue	MP	AM PM	Signal	56.3 50.9	E D	66.6 40.1	E D	10.3 -10.8
57	El Camino Real & Santa Cruz Avenue	MP	AM PM	Signal	30.5 27.9	C C	21.9 29.4	C C	-8.6 1.5
58	Merrill St & Santa Cruz Avenue	MP	AM PM	All-way Stop	12.9 20.3	B C	11.2 >120	B F	-1.7 >60
59	Ravenswood Avenue & Alma Street	MP	AM PM	Side-Street Stop	40.6 41.8	E E	29.8 27.1	D D	-10.8 -14.7

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	2020 No Project Delay ^b	2020 Project LOS ^c	2020 Project Delay ^b	2020 Project LOS ^c	Change in Delay
60	El Camino Real & Ravenswood Avenue	MP	AM PM	Signal	73.6 >120	E F	75.0 >120	E F	1.4 1.8
61	Ravenswood Avenue & Laurel Street	MP	AM PM	Signal	73.4 >120	E F	37.0 50.1	D D	-36.4 >-60
88	Laurel Street and Oak Grove Avenue	MP	AM PM	Signal	11.1 10.7	B B	11.1 13.0	B B	0.0 2.3
89	Laurel Street and Glenwood Avenue	MP	AM PM	All-way Stop	6.9 8.4	A A	6.9 7.1	A A	0.0 -1.3
90	Laurel Street and Encinal Avenue	MP	AM PM	All-way Stop	5.6 6.6	A A	5.7 6.3	A A	0.1 -0.3
62	Alma Street & Palo Alto Avenue	PA	AM PM	Side-Street Stop	8.4 12.4	A B	13.3 31.4	B D	4.9 19.0
63	Meadow Drive & Alma Street	PA	AM PM	Signal	104.2 >120	F F	110 >120	F F	5.8 29.1
64	El Camino Real & Alma & Sand Hill Road	PA	AM PM	Signal	58.5 54.9	E D	78.7 53.5	E D	20.2 -1.4
65	High Street & University Avenue	PA	AM PM	Signal	10.1 18.6	B B	12.8 18.4	B B	2.7 -0.2
66	Alma Street & Churchill Avenue	PA	AM PM	Signal	83.9 >120	F F	108.9 >120	F F	25.0 9.2
67	W Meadow Drive & Park Boulevard	PA	AM PM	Side-Street Stop	>120 >120	F F	>120 >120	F F	>-60 >-60
68	Alma Street & Charleston Road	PA	AM PM	Signal	>120 >120	F F	>120 >120	F F	28.4 9.0
69	Showers Drive & Pachetti Way	MV	AM PM	Signal	4.4 5.0	A A	4.8 5.3	A A	0.4 0.3
70	Central Expressway & N Rengstorff Avenue	MV SCC	AM PM	Signal	>120 >120	F F	>120 >120	F F	4.2 46.6
71	Central Expressway & Moffett Boulevard & Castro Street	MV SCC	AM PM	Signal	>120 >120	F F	>120 >120	F F	2.5 5.8
72	W Evelyn Avenue & Hope Street	MV	AM PM	Signal	3.8 5.7	A A	3.8 5.8	A A	0 0.1
73	Rengstorff Avenue & California Street	MV	AM PM	Signal	29.5 55.6	C E	31.4 40.5	C D	1.9 -15.1
74	Castro Street & Villa Street	MV	AM PM	Signal	11.7 65.5	B E	14.7 68.5	B E	3.0 3.0
75	W Evelyn Avenue & S Mary Avenue	SV	AM PM	Signal	68.7 80.1	E F	56.7 97.3	E F	-12.0 17.2
76	W Evelyn Avenue & Frances Street	SV	AM PM	Signal	20 26.3	B C	31.9 36.6	C D	11.9 10.3
ZONE 4									
77	Kifer Road & Lawrence Expressway ^e	SCL SCC	AM PM	Signal	111.4 >120	F F	114.6 >120	F F	3.2 2.9
78	Reed Avenue & Lawrence Expressway	SCL SCC	AM PM	Signal	107.3 86.4	F F	107.4 68.1	F F	0.1 -18.3
79	El Camino Real & Railroad Avenue	SCL	AM PM	Signal	17.8 21.9	B C	20.1 22.1	C C	2.3 0.2
80	W Santa Clara Street & Cahill Street	SJ	AM PM	Signal	25.8 47.8	C D	23.0 62.8	C E	-2.8 15.0
81	S Montgomery Street & W San Fernando Street	SJ	AM PM	Signal	22.8 64.3	C E	29.0 >120	C F	6.2 >60

Int. ID	Intersection	Jurisdiction	Peak Hour ^a	Intersection Control	2020 No Project Delay ^b	LOS ^c	2020 Project Delay ^b	LOS ^c	Change in Delay
82	Lick Avenue & W Alma Avenue	SJ	AM	Signal	23.2	C	31.4	C	8.2
			PM		30.3	C	45.6	D	15.3

Source: Appendix D, *Transportation Analysis*

Notes:

Jurisdictions:

SF	San Francisco	SM	San Mateo	MV	Mountain View
SSF	South San Francisco	BL	Belmont	SV	Sunnyvale
SB	San Bruno	SC	San Carlos	SCL	Santa Clara
MB	Millbrae	RC	Redwood City	SCC	Santa Clara County
BG	Burlingame	AT	Atherton	SJ	San Jose
MP	Menlo Park	PA	Palo Alto		

^a AM = morning peak hour, PM = afternoon peak hour

^b Delay measured in seconds

^c LOS designation pursuant to 2010 Highway Capacity Manual

^d Downtown Redwood City has no level of service standard for intersections in the *Downtown Precise Plan* area (Policy BE-29.4).

^e ~~City of Santa Clara level of service exemptions exist for new development, to facilitate alternate transportation in Station Focus Areas.~~

Font represents an LOS that is below the established threshold of significance as per the Significance Criteria **Font** represents locations and conditions where the Proposed Project would result in a significant impact relative to the No Project scenario.

Based on a prototypical schedule.

1

2 It should be noted that the analysis is based on a prospective 2020 schedule that was developed
 3 only for analytical purposes for this EIR. Although the schedule has yet been finalized, it is the best
 4 available data to be used for identifying the potential traffic operation impact of the Proposed
 5 Project. The actual schedule may vary, which could influence the schedule at some of the local
 6 stations, but would not be expected to substantially change the estimated vehicle delay at the study
 7 intersections.

8 The traffic operation analysis accounts for the changes in gate-down times at at-grade crossings and
 9 changes in local traffic patterns and traffic volumes near the stations. As shown in Table 3.14-16, a
 10 comparison of the intersection levels of service and delays under the 2020 No Project scenario with
 11 the 2020 Project scenario indicates that the Proposed Project would cause traffic delays for 21 study
 12 intersections to exceed the significance thresholds during the AM and/or PM peak hours. This is
 13 considered a significant impact.

14 Local roadway improvements, including signal optimization and roadway geometry improvements
 15 are proposed as part of Mitigation Measure TRA-1c to improve the operations and to reduce or
 16 eliminate the localized significant impact at the impacted intersections and at-grade crossings. Table
 17 3.14-17 summarizes the intersection impacts and the associated mitigation measures proposed to
 18 reduce these identified impacts. Localized traffic impacts would be reduced to a less-than-significant
 19 level at ~~12~~ 14 of the significantly affected locations. The impact would remain significant and
 20 unavoidable at the other ~~9~~ 7 locations because either the proposed signal optimization and roadway
 21 geometry improvements would be insufficient to reduce the impact sufficiently or no feasible
 22 mitigation is available.

Table 3.14-17. Summary of Intersection Impacts and Mitigation Measures

Int. ID	City	Intersection	Impacted Peak Hour	Mitigation Strategies	Impact Significance after Mitigation
Signalized Intersections					
1	<u>San Francisco</u>	4th Street and King Street	PM	Revise signal timing and phasing to better coordinate with 4th Street and Townsend Street	Less than significant
2	<u>San Francisco</u>	4th Street and Townsend Street	PM	Revise signal timing and phasing to better coordinate with 4th Street and King Street	Less than significant
5	<u>San Francisco</u>	7th Street and 16th Street	AM	Widen northbound approach to lengthen left turn pocket Remove parking lane to create a third lane for the eastbound approach Revise signal timing and phasing to better coordinate with 16th Street and Owens Street <u>Pre-emption, pre-signals or queue cutters as necessary to manage queues relative to the rail crossing.</u>	Less than significant
16	<u>San Francisco</u>	El Camino Real and Millbrae Avenue	AM and PM	Adjust signal timings to better serve traffic after project implementation	Less than significant
17	<u>Millbrae</u>	Millbrae Avenue and Rollins Road	PM	Adjust signal timings to better serve traffic after project implementation	Less than significant
18	<u>Burlingame</u>	California Drive and Broadway	AM and PM	Adjust signal timings to better serve traffic after project implementation	Less than significant
36	<u>San Mateo</u>	E Hillsdale Boulevard and El Camino Real	AM	Adjust signal timings to better serve traffic after project implementation	Less than significant
55	<u>Menlo Park</u>	El Camino Real and Glenwood Avenue	AM and PM	Adjust signal timings to better serve traffic after project implementation	Less than significant Significant and unavoidable ^a
56	<u>Menlo Park</u>	El Camino Real and Oak Grove Avenue	AM	Adjust signal timings to better serve traffic after project implementation	Less than significant Significant and unavoidable ^a
63	<u>Palo Alto</u>	Meadow Drive and Alma Street	AM and PM	No feasible mitigations exist ^{ba}	Significant and unavoidable
64	<u>Palo Alto</u>	El Camino Real and Alma Street and Sand Hill Road	AM	Widen west leg of Sand Hill Road by adding one lane to allow southbound right turns on red Adjust signal timings to better serve traffic after project implementation <u>Evaluate potential signal pre-emption with Caltrans and City of Palo Alto to manage traffic movements.</u>	Less than significant
66	<u>Palo Alto</u>	Alma Street and Churchill Avenue	AM and PM	No feasible mitigations exist ^{ba}	Significant and unavoidable

Int. ID	City	Intersection	Impacted Peak Hour	Mitigation Strategies	Impact Significance after Mitigation
68	<u>Palo Alto</u>	Alma Street and Charleston Road	AM and PM	No feasible mitigations exist ^{ba}	Significant and unavoidable
70	<u>Mt. View</u>	Central Expressway and N Rengstorff Avenue	PM	No feasible mitigations exist ^{ba}	Significant and unavoidable
71	<u>Mt. View</u>	Central Expressway and Moffett Boulevard and Castro Street	AM and PM	No feasible mitigations exist ^{ba}	Significant and unavoidable
75	<u>Sunnyvale</u>	W Evelyn and S Mary Avenue	PM	No feasible mitigations exist ^{eb}	Significant and unavoidable
80	<u>San Jose</u>	W Santa Clara Street and Cahill Street	PM	Adjust signal timings to better serve traffic after project implementation	Less than significant
81	<u>San Jose</u>	South Montgomery Street and W San Fernando Street	PM	Adjust signal timings to better serve traffic after project implementation	Less than significant
Stop-Controlled Intersections					
21	<u>Burlingame</u>	Carolan Avenue and Oak Grove Avenue	AM and PM	Signalize intersection	Significant and unavoidable ^{dc}
51	<u>Atherton</u>	El Camino Real and Watkins Avenue	AM and PM	Signalize intersection	Less than significant
54	<u>Atherton</u>	Glenwood Avenue and Middlefield Road	AM and PM	Signalize intersection	Less than significant

Source: Appendix D, *Transportation Analysis*

^a ~~Less than significant after mitigation but a secondary impact would be produced at Intersection #61 (Ravenswood Avenue and Laurel Street). After mitigation, the delay would increase by more than 4 seconds at Intersection #61.~~

^{ba} Addition of through lanes along Central Expressway and Alma Street may reduce the impact at this location, but the addition of through lanes is subject to ROW constraints and is, therefore, infeasible.

^{eb} Implementation of a grade-separated crossing may reduce the impact but is subject to fiscal constraints. Therefore, this mitigation is considered infeasible for purposes of this document.

^{dc} Intersection impacts would be less than significant after mitigation, but a secondary impact would be produced at Intersection #20 (California Drive and Oak Grove Avenue) with the signalization of Carolan Avenue/Oak Grove Avenue. After mitigation, average vehicle delay would increase by more than 4 seconds at Intersection #20.

1 While grade separations are a technically feasible way to reduce traffic impacts at the at-grade
2 locations, it is a highly expensive mitigation strategy. Caltrain has supported past and present grade-
3 separation projects (such as the current San Bruno Grade Separation project) and will support
4 future efforts at grade separation where acceptable to local communities and where local, state, and
5 federal funding can be obtained to fund these improvements. However, using an average assumed
6 cost of \$50 million to \$100 million per crossing (grade separations can cost much more sometimes),
7 grade separating the at-grade crossings closest to the ~~nine~~ 7 significantly affected intersections
8 (after mitigation in Mitigation TRA-1c) would cost ~~\$450~~ \$350 million to ~~\$900~~ \$700 million. The
9 budget for the Proposed Project is \$1.225 billion by comparison. Thus, Caltrain cannot commit to a
10 comprehensive program of grade separations at this time to address all significantly affected
11 intersections and this impact is considered significant and unavoidable.

12 **Mitigation Measure TRA-1c: Implement signal optimization and roadway geometry**
13 **improvements at impacted intersections for the 2020 Project Condition**

14 Table 3.14-17 summarizes the intersection impacts and the associated mitigation measures
15 proposed to minimize localized traffic impacts. Detailed description for improvements at each
16 impacted intersections are included in the transportation analysis report in Appendix D,
17 *Transportation Analysis*. Possible mitigation measures include signal optimization and roadway
18 geometry improvements, as discussed below:

- 19 ● Signal optimization: Signal timing optimization would be performed to reduce delay at
20 signalized intersections. This can include optimizing the cycle time, splits, and phasing. In
21 addition, for closely spaced intersections, optimizing the offset and better signal
22 coordination will also reduce delay.
- 23 ● Roadway geometry changes: Changing the roadway geometry could help reduce
24 intersection delay. This would include changing the roadway width by widening the street
25 or changing the existing geometry configuration through restriping. Intersection #64 (El
26 Camino Real and Alma Street and Sand Hill Road) is an example of where roadway geometry
27 could be altered as a mitigation measure to reduce intersection delay.
- 28 ● A review of the significantly affected intersections identified one location (7th/16th Street
29 in San Francisco) where, with the proposed mitigation, there is a possibility of queues
30 backing up to the grade crossing. Thus, this measure also includes pre-emption, pre-signals
31 or queue cutters at this location to prevent an increase in potential queue back to the grade
32 crossing.
- 33 ● IPB will coordinate with the CPUC during the final design phase of the project concerning
34 adjustment of traffic signals and road geometry adjacent to at-grade crossings through the
35 GO 88-B process.

36 IPB will coordinate with local jurisdictions during the design phase of roadway mitigation measures
37 that affect roadways under local jurisdiction.

1 **Transit Systems**

Impact TRA-2a	Disrupts existing or planned transit services or facilities during construction
Level of Impact	Significant
Mitigation Measures	TRA-1a: Implement construction road Traffic Control Plan TRA-2a: Implement construction railway disruption control plan
Level of Impact after Mitigation	Less than significant

2 During the construction, installation of OCS poles and wires would require the use of on-track
 3 equipment in many locations. The majority of the work could be accomplished during the nighttime
 4 using single-track access; however, some portions of the work would require some multiple track
 5 shutdowns and could only be installed by using complete weekend outages, requiring suspension of
 6 passenger service, to increase working efficiency and reduce public safety risks. Although most of
 7 the on-track work would be conducted during nighttime hours with occasional service shutdowns
 8 occurring during weekends, the construction impact on Caltrain passengers (or ACE, Capitol
 9 Corridor, or Amtrak trains between Santa Clara and San Jose) that take trains at night or on the
 10 weekend is considered significant.

11 In addition, to accelerate construction completion, construction strategies to improve construction
 12 efficiency with minimizing construction impacts are included in the Proposed Project as shown in
 13 Chapter 2, *Project Description*, Table 2-5. The strategies that could potentially disrupt Caltrain
 14 service and affect Caltrain passengers and the connecting transit services include revising the
 15 Caltrain schedule, reducing the span of Caltrain service day, reducing the number of trains, shutting
 16 down service for specific weekends, and closing a station temporarily during construction. Although
 17 specific strategies have yet been determined, any of the strategies, if selected, would result in
 18 temporary significant impacts on Caltrain passengers and the connecting transit services.

19 Implementation of Mitigation Measure TRA-2a would reduce the temporary construction impact on
 20 rail passenger and freight service disruption to a less-than-significant level by minimizing the
 21 duration of potential disruption to service during construction.

22 Similar to Impact TRA-1a, construction impact on roadway transit services could be potentially
 23 significant when temporary lane or road closures are required on roadway segments, bridges, and
 24 at-grade crossings with transit services. Implementation of Mitigation Measure TRA-1a would
 25 reduce the temporary construction impact on roadway transit services to a less-than-significant
 26 level.

27 **Mitigation Measure TRA-2a: Implement construction railway disruption control plan**

28 The JPB will make efforts to contain disruption to Caltrain, tenant passenger, and freight
 29 services during construction. Measures that will be implemented throughout the course of
 30 project construction, will include, but are not limited to, the following:

- 31 ● The overall goal of this plan should be to minimize the overall duration of disruption of
 32 Caltrain, tenant passenger, and freight operations and maintain reasonable levels of service,
 33 while allowing for an expeditious completion of construction.
- 34 ● Limit number of simultaneous track closures within each immediate vicinity, with closure
 35 time frame limited as much as feasible for each closure, unless bypass tracks are available.

- 1 ● Provide safety measures for rail services to transit through construction zones safely.
- 2 ● Require contractors to coordinate with rail dispatch to minimize disruption of rail service in
- 3 the corridor.
- 4 ● Where feasible, limit closure of any tracks for construction activities to off-peak periods and
- 5 weekends, when service is less frequent or late night, when no passenger service is
- 6 scheduled.
- 7 ● Where feasible, maintain acceptable service access for passenger and freight service.
- 8 ● Where one open track cannot be maintained for passenger or freight use, limit multi-track
- 9 closures to one location at a time, as much as feasible
- 10 ● Where multi-track closures result in temporary elimination of transit rail service, work with
- 11 local and regional transit providers to provide alternative transit service around the closure
- 12 area including increased bus and shuttle service.
- 13 ● Where multi-track closures result in temporary elimination of freight rail service, work with
- 14 Union Pacific and freight users to schedule alternative freight service timing to minimize
- 15 disruption to freight customers.
- 16 ● Provide advance notice of all construction-related track closures to all affected parties.
- 17 Provide advance notice to transit riders of any temporary disruption in transit service.
- 18 ● Where temporary cessation of freight rail service is necessary due to multi-track closures
- 19 and would result in substantial diversion to truck modes, Caltrain or its construction
- 20 contractor shall coordinate with local jurisdictions and freight operations to determine
- 21 preferred truck routes to minimize the effect on local traffic conditions.
- 22 ● Construction in and adjacent to BART facilities will be coordinated in advance and during
- 23 construction with BART including any necessary BART safety monitors. If construction
- 24 would result in any potential service disruption, Caltrain or its construction contractor shall
- 25 coordinate with BART to avoid the disruption and/or minimize the extent and duration of
- 26 disruption and provide information to commuters on alternative transit options during the
- 27 disruption.
- 28 ● Caltrain and/or its construction contractor shall coordinate with Union Pacific in advance
- 29 and during any potential disruption to freight operations and/or Union Pacific facilities.
- 30 Union Pacific’s emergency access will be maintained throughout construction.

Impact TRA-2b Creates demand for public transit services above the capacity which is provided or planned; interferes with existing or planned transit services or facilities; or conflicts or creates inconsistencies with adopted transit system plans, guidelines, policies, or standards from Proposed Project operations

Level of Impact Beneficial (Caltrain); Less than Significant (other transit services)

31 Proposed Project implementation would not conflict or create inconsistencies with adopted transit
 32 plans, guidelines, policies or standards adopted by study area cities, counties, the MTC, or the State of
 33 California. Some of the adopted plans would extend through 2020 or expire after. On the city level,
 34 Caltrain is a beneficial component of currently approved and ongoing station area plans, downtown
 35 specific plans, and general plans. In some cases, a city’s Caltrain station is the focal point of a plan or at
 36 least a major aspect of the circulation element within the city’s general plan. On the regional level,

1 Caltrain is consistent with *Plan Bay Area*. The Proposed Project is one of the major projects included in
 2 *Plan Bay Area*. *Plan Bay Area* serves as the region’s SCS and the 2040 Regional Transportation Plan
 3 (preceded by *Transportation 2035 Plan for the San Francisco Bay Area*), integrating transportation and
 4 land-use strategy to manage greenhouse gas emissions and plan for future population growth. The
 5 transition from a diesel-hauled to electrified (EMU) fleet would contribute to regional greenhouse gas
 6 reduction goals. On the state-level, Caltrain is consistent with the State’s blueprint for meeting future
 7 mobility needs. For example, the electrification of Caltrain would contribute to the quality environment
 8 goals, as EMUs are far more environmentally efficient than diesel-hauled locomotives. As a result, the
 9 impact of the Proposed Project relative to transit planning would be less than significant and beneficial.

10 **Caltrain Transit Ridership and System Capacity**

11 Table 3.14-18 displays ridership projections for the No Project and Project scenarios in 2020.

12 **Table 3.14-18. Daily Ridership Forecasts by Station, San Francisco 4th and King to Tamien^a**

Station	Existing Conditions	2020 No Project	2020 Project
4th and King	10,790	13,000	14,340
22nd Street	1,310	1,950	2,310
Bayshore	200	440	730
South San Francisco	360	550	800
San Bruno	440	480	500
Millbrae	3,260	3,970	5,130
Broadway	0	0	390
Burlingame	790	890	760
San Mateo	1,570	1,740	1,910
Hayward Park	330	490	1,070
Hillsdale	2,320	2,740	3,370
Belmont	510	510	750
San Carlos	1,140	1,370	1,440
Redwood City	2,620	2,970	3,180
Atherton	0	0	280
Menlo Park	1,530	1,580	1,520
Palo Alto	5,470	6,380	7,910
California Avenue	1,290	1,410	1,380
San Antonio	680	750	840
Mountain View	3,876	4,580	5,920
Sunnyvale	2,270	2,720	3,280
Lawrence	700	920	1,160
Santa Clara	820	890	1,090
College Park ^b	--	--	--
San Jose Diridon	3,490	4,270	5,600
Tamien	810	1,220	2,100
Total	46,560	55,830	67,730

Source: Appendix D, *Transportation Analysis*.

Daily Ridership is presented as passenger boardings, defined as the number of passengers who board a train at a given station.

^a Excludes boardings south of Tamien Station

^b No service increases are proposed at the College Park Station and ridership at this station is very low at present (118 boardings/day). While College Park boardings are included in overall system ridership estimates, no analysis of localized traffic around this station was conducted given the low level of boardings and lack of proposed service increases.

1 Under the No Project scenario, corridor population and employment growth accompanied by
2 changes to other transit connections and increases in highway congestion would contribute to the
3 increase of Caltrain ridership, compared with the current condition. The change is not evenly
4 distributed across all stations in the study area. With higher land use growth and transit
5 connectivity, stations experiencing the greatest ridership increases, in percentage, would be 22nd
6 Street, Bayshore, South San Francisco, San Bruno, and Hayward Park. These ridership gains are in
7 line with the steady growth in Caltrain ridership since 2006. In percentage terms, San Francisco 4th
8 and King would be one of the lowest growth stations, reflecting a redistribution of the trip origins
9 and destinations to shorter intra-Peninsula travel in the future.

10 Proposed Project implementation would further increase the ridership because the Proposed Project
11 would increase train frequencies and improve service levels as EMUs would be able to make more stops
12 while maintaining travel times. The Proposed Project would raise 2020 ridership by 21 percent over the
13 2020 No Project condition. Stations with the greatest ridership increases in percentage between 2020
14 No Project and 2020 Project would be Bayshore, South San Francisco, Hayward Park and Tamien.
15 Compared with 2020 No Project, small decreases in ridership are projected for Burlingame, Menlo Park,
16 and California Avenue.

17 It should be noted that the specific station ridership forecasts are based on a prospective 2020
18 schedule that was developed only for analytical purposes for this EIR. The actual schedule may vary,
19 which could influence some of the local station ridership, but would not be expected to substantially
20 change the overall system ridership estimates. In advance of mixed service in 2020, Caltrain staff
21 would analyze station-to-station ridership patterns and conduct public outreach to develop the
22 actual customer timetable.

23 As a result, the impact would be less than significant and beneficial for the Caltrain system.

24 **Ridership and Impact on Connecting Transit Systems**

25 The ridership projections on the regional transit systems that connect to the Caltrain service assume
26 that transit systems that currently connect to Caltrain, as described above, would remain in service in
27 2020. In addition, as described above, transit connections and extensions that were planned to open by
28 years 2020 are also reflected in the projection. The planned transit projects are described in detail in
29 Appendix D, *Transportation Analysis*, and Appendix I, *Ridership Technical Memorandum*. Ridership
30 projections for connecting systems are derived from the VTA model. Ridership projections for the
31 following systems are summarized in Table 3.14-19.

32 As shown in Table 3.14-9, the total number of system-wide boardings on Caltrain would be greater
33 for the Project scenario than under the No Project scenario. The added Caltrain boardings associated
34 with the Project scenario would result in a need for increased connecting transit services. Therefore,
35 ridership on connecting systems would increase by 1.4 percent for the 2020 Project condition as
36 compared with 2020 No Project condition.

1 **Table 3.14-19. Ridership on Transit Systems Connecting to Caltrain**

Connecting Transit System	Existing Conditions (observed)	2020 No Project	2020 Project	Change Project vs. No Project
BART	366,600	459,500	459,100	-0.1%
SamTrans Bus (Local and BRT)	39,800	73,400	75,800	3.3%
VTA Light Rail	34,600	70,600	70,700	0.1%
VTA Bus (Local and BRT)	103,100	165,600	167,100	0.9%
VTA BRT	-	42,500	42,500	0.0%
Muni MUNI Metro	173,500	203,800	205,200	0.7%
Muni MUNI Bus	531,700	592,600	595,500	0.5%
Shuttles (Public and Private)	NA	12,200	16,600	36.1%
Total	1,250,600	1,626,000	1,648,800	1.4%

Source: Appendix D, *Transportation Analysis*

BRT = bus rapid transit

2
3 As shown in Table 3.14-19, growth in the region by 2020 will increase demand for increased transit
4 service. The Proposed Project is one of many projects in the planning phase to address that
5 increased demand.

6 One concern is that the Proposed Project might result in induced ridership for other systems that
7 would result in changes in physical conditions such as through the construction of additional
8 transportation infrastructure to address the increased ridership. As shown in Table 3.14-19,
9 compared with the 2020 No Project scenario, the Proposed Project is expected to slightly lower
10 ridership on BART and slightly increase ridership on VTA and Samtrans. The largest induced
11 ridership for public transit systems would be for SamTrans bus service (+ 3.3 percent). While the
12 increased demand may increase the need for bus service and vehicles, given that Caltrain facilities
13 already contain bus connections and the modest level of increase, the induced ridership is not
14 expected to result in substantial new capital improvements for SamTrans beyond that which it
15 would plan for without the Proposed Project. A similar conclusion applies for other public transit
16 systems, all of which are estimated to have less than 1 percent increases due to induced ridership
17 from the Proposed Project. Like Caltrain, other transit providers must plan for their future needs
18 and construct the facilities to meet their system rider demands as feasible given funding availability.

19 The Proposed Project would also contribute substantially to increases in Caltrain and private
20 shuttles. Although this increase by itself is not expected to require substantial new facilities, it would
21 contribute to the need for bus shelters, stops, and maintenance facilities.

22 Because infrastructure improvements for transit services other than Caltrain and their funding are
23 outside the responsibility of the JPB, the responsibility for managing the environmental effects of
24 any additional transit facilities or service that might be necessary to meet future demands lies with
25 each transit operator. For future improvements that may be necessary to accommodate increased
26 Caltrain shuttle service due to increased ridership from the Proposed Project, such as shuttle bus
27 stops, shelters, or other facilities, Caltrain will be required to complete the appropriate state (and
28 federal if required) environmental review for such improvements and shall adopt feasible mitigation
29 for any significant environmental impacts thus identified. For future improvements that may be
30 necessary to accommodate increased other transit service due to increased ridership from the
31 Proposed Project, the responsible transit operations will be required complete the appropriate state

1 (and federal if required) environmental review for such improvements and shall adopt feasible
2 mitigation for any significant environmental impacts thus identified.

3 At this time, it appears unlikely that the relatively modest increases in ridership for other transit
4 services due to the Proposed Project would require the construction of additional transit
5 infrastructure. Thus any secondary impacts due to construction of additional facilities would be less
6 than significant and the Proposed Project’s impact related to induced demand for additional transit
7 infrastructure would be less than significant.

8 **Potential Impacts on Other Transit Systems due Electromagnetic Interference**

9 EMF/EMI impacts are discussed in Section 3.5, *Electromagnetic Fields and Electromagnetic*
10 *Interference.*

11 **Potential Conflicts between Proposed Project and Other Planned Transit Systems**

12 Potential safety, operational, or construction conflicts between the other planned transit systems
13 and the Proposed Project such as SFMTA’s proposal to reroute the 22-Fillmore Electric Trolley Bus
14 to 16th Street, the Downtown Extension, or the BART Silicon Valley Extension are addressed
15 separately in Section 4.1, *Cumulative Impacts.*

Impact TRA-2c	Substantially increase hazards for transit system operations because of a design feature or otherwise substantially compromise the safety of transit facilities
----------------------	---

Level of Impact	Less than significant
------------------------	-----------------------

16 Under existing conditions, Caltrain operates a commuter railroad of 92 trains per day between San
17 Jose and San Francisco at speeds up to 79 mph. Caltrain trains operate along the corridor in
18 compliance with FRA requirements applicable to the different segments of the corridor in terms of
19 speed and clearances required to safely operate the railroad. At-grade crossing warning devices are
20 in place to provide advanced warning to motorists, pedestrians, and bicyclists of approaching trains
21 and Caltrain trains use train horns per the FRA horn regulations to provide additional warning for
22 safety purposes.

23 As described in Section 3.14.2.1, *Methods for Analysis*, Caltrain is presently enhancing the safety of
24 the Caltrain corridor through the CBOSS PTC project, which will be completed by 2015. PTC helps to
25 eliminate the potential for train-to-train collisions and over-speed rule violations (trains exceeding
26 the civil speed limit). The train will be automatically stopped before collisions occur. It also provides
27 additional safety for railroad workers on the tracks and requires interoperability between all rail
28 services operating on the same tracks. This interoperability assures compliance among all vehicles
29 using the same tracks with the PTC system. This is important for Caltrain as other operators on
30 Caltrain tracks include intercity rail and freight. The Caltrain CBOSS PTC project also specifies
31 additional capabilities to enable increased safety and operating performance for Caltrain and future
32 high-speed rail service.

33 Additional benefits of the CBOSS PTC project include:

- 34 ● Increased operating performance of the current signal system, enabling more frequent and
35 more dependable passenger service to meet growing demand.
- 36 ● Improved at-grade crossing warning functions.

- 1 • Integrated communication among all subsystems (such as the central control facility, train and
- 2 wayside) for improved safety performance for highway vehicles and the riding public.
- 3 • Safe operations between Caltrain and other tenant railroads.

4 The CBOSS PTC project will improve safety along the corridor compared with existing conditions for
5 both the 2020 No Project and 2020 Project scenarios.

6 The Proposed Project would increase daily service to 114 trains per day by 2020. These trains
7 would operate at speeds up to 79 mph, the same top speed as at present. The proposed EMUs can
8 accelerate and decelerate faster than diesel locomotives, which can help to improve safety because,
9 in the event of an emergency, the EMUs would be able to stop in a shorter distance than diesel
10 locomotives. Even though the number of trains would increase by approximately 20 percent, given
11 the increased performance and control with the new EMUs and the safety benefit of CBOSS PTC,
12 there should not be an increased risk of collision with vehicles, pedestrians, and bicycles compared
13 with the existing conditions or compared with the 2020 No Project scenario.

14 As discussed in Section 3.8, *Hazards and Hazardous Materials*, the Proposed Project's new OCS
15 would not pose an impediment to routine emergency equipment access for the Caltrain system or
16 connecting transit systems like BART, SamTrans, ~~MUNI Muni~~, or VTA and the Proposed Project
17 would not have a significant impact on emergency response or evacuation plans.

18 As discussed in Section 3.13, *Public Services and Utilities*, the OCS would be installed in compliance
19 with industry safety standards and the future applicable CPUC General Order developed for 25 kVA
20 systems concerning electrical safety operation. Vegetation and structural clearances would be
21 maintained to provide for electrical safety.

22 As described in Chapter 2, *Project Description*, an electric safety zone (ESZ) will be established
23 within 10 feet of the energized elements of the OCS. Vegetation would be removed within this zone
24 and structures would not be allowed within 6 feet of the energized elements of the OCS. Creation of
25 this zone will ensure that no trees or structures would interfere with the catenary system and will
26 thus minimize potential fires or other consequences from downed wire events should they occur.

27 The system is designed to protect employees and the public from voltages caused by faults (i.e.,
28 energized wires coming into contact with earth/ground) and to remove power in the affected area.
29 Under design conditions, it is estimated that clearing of the faulted area (e.g., the shutoff of power)
30 should not exceed 10 cycles (0.167 seconds). In the unlikely probability the protection devices fail to
31 detect abnormalities and energized wires come into contact with the earth, there would be arcing
32 and the earth potential is raised and a potential for fire and other damage. This probability is very
33 small and consistent with what one would expect from overhead electrical distribution lines already
34 in service in the area.

35 The system would be resilient in facing rain or hail and will be designed withstand predicted winds
36 in the area. Regarding lightning, lightning can cause a fault in the OCS or the TPFs similar to how it
37 can affect power lines or power substations already along the system. As noted above, the system is
38 designed to address potential faults and system protection devices exist to shut down the power in
39 the event of those faults.

40 As discussed below, the Proposed Project would provide adequate vertical clearance for both
41 existing passenger rail vehicles as well as freight vehicles to safely operate on the Caltrain corridor

1 ~~as well as comply with any applicable FRA waiver requirements for temporal separation between~~
 2 ~~EMUs and heavy freight trains to minimize the risk of freight-passenger collisions⁸.~~

3 Thus, the Proposed Project would have a less-than-significant impact related to transit system
 4 hazards and safety.

5 **Pedestrian Systems**

Impact TRA-3a	Disrupts existing or planned pedestrian facilities during construction
Level of Impact	Significant
Mitigation Measure	TRA-1a: Implement construction Traffic Control Plan
Level of Impact after Mitigation	Less than significant

6 Construction impact on pedestrian facilities would be limited to locations where sidewalks or paths
 7 would require temporary closure to facilitate construction activities. This would occur related to
 8 closure of at-grade crossings when installing OCS infrastructure or when relocating utilities. The
 9 impact could be significant on pedestrian facilities, when temporary sidewalk or walking path
 10 closure is required. Implementation of Mitigation Measure TRA-1a would reduce the temporary
 11 construction impact to a less-than-significant level.

Impact TRA-3b	Disrupts existing pedestrian facilities, interferes with planned pedestrian facilities, or conflicts or creates inconsistencies with adopted pedestrian system plans, guidelines, policies, or standards from Proposed Project operations
Level of Impact	Significant
Mitigation Measure	TRA-3b: In cooperation with the City and County of San Francisco, implement surface pedestrian facility improvements to address the Proposed Project’s additional pedestrian movements at and immediately adjacent to the San Francisco 4th and King Station
Level of Impact after Mitigation	Less than significant

12 Many cities are locating pedestrian facilities in locations near and complementary to Caltrain station
 13 areas. In some instances, pedestrian infrastructure enhancements are included in a city or county’s
 14 bicycle or pedestrian plan, such as in the *City of South San Francisco Bicycle Master Plan* and the *San*
 15 *Mateo County Comprehensive Bicycle and Pedestrian Plan*. A full list and summaries of these
 16 pedestrian and bicycle plans for study area jurisdictions is in Appendix D, *Transportation Analysis*.

17 Increased ridership under Proposed Project conditions would subsequently cause increased
 18 pedestrian volumes at pedestrian facilities surrounding Caltrain stations. The existing pedestrian
 19 facilities were evaluated to determine if pedestrian facilities would be capable of accommodating
 20 increased pedestrian volumes. Results showed the existing facilities are capable of accommodating
 21 increased pedestrian volumes at all stations with the exception of the 4th and King Station in San
 22 Francisco.

⁸ FRA initiated rule-making in 2013 regarding standards for alternative compliant vehicle. ~~It is possible that FRA may consider revisions to the current requirements for temporal separation which may allow for wider freight operational hours than specified in the FRA waiver. As discussed in Chapter 2, Caltrain now presumes that temporal separation will not be required for the Proposed Project and thus there would be no substantial change in operational freight windows with the project.~~

1 Existing pedestrian facilities, including sidewalks and crosswalks, surrounding the 4th and King
2 Station currently experience high levels of pedestrian activity. This trend is projected to continue in
3 future years.

4 As discussed in Appendix D, *Transportation Analysis*, boardings at the 4th and King Station would
5 increase from 10,700 under existing conditions to 13,000 under 2020 No Project conditions or to
6 14,340 with the Proposed Project (an increase of 1,340 over 2020 No Project conditions). In 2040,
7 without the Proposed Project (and the San Francisco Downtown Extension [DTX] and Transbay
8 Transit Center [TTC]), daily boardings at the 4th and King Station would increase to 16,560. In 2040,
9 with the Proposed Project (and DTX/TTC), boardings would increase to 15,230 (1,330 fewer
10 boardings than under 2040 No Project conditions). There would be fewer boardings because
11 customers would continue to the TTC located in downtown San Francisco instead of getting off at
12 the 4th and King station. Thus, the Proposed Project would contribute to increased pedestrian
13 activity from 2020 until DTX/TTC infrastructure is completed. Other transit improvements in
14 proximity to the 4th and King stations, such as the Central Subway project, would also add
15 pedestrians in this area.

16 Due to existing high levels of pedestrian activity and the anticipated increase in pedestrian activity
17 under Proposed Project conditions as compared with No Project conditions, pedestrian facility
18 capacity may be exceeded in 2020. Pedestrian facility flow and safety improvements will be
19 implemented pursuant to Mitigation Measure TR-3b described below to allow the orderly
20 movement of pedestrians, bicyclists, private vehicles, buses, and shuttles around the 4th and King
21 Station. With this mitigation, the impact at the San Francisco 4th and King Station would be less than
22 significant.

23 **Mitigation Measure TRA-3b: In cooperation with the City and County of San Francisco,**
24 **implement surface pedestrian facility improvements to address the Proposed Project's**
25 **additional pedestrian movements at and immediately adjacent to the San Francisco 4th**
26 **and King Station**

27 The JPB, in cooperation with the City and County of San Francisco, will improve surface
28 pedestrian facilities at the San Francisco 4th and King Station where needed to accommodate
29 the Proposed Project's increase in pedestrian volumes. This mitigation applies to increased
30 pedestrian traffic under Proposed Project conditions that would occur within the impact
31 window beginning in 2020 and ending when DTX/TTC is fully operational.

32 Both the JPB and the City and County of San Francisco will implement a pedestrian access study
33 to identify the surface improvements necessary to accommodate the Proposed Project's
34 increased pedestrian demand during the impact window identified above. The JPB's
35 responsibility will be to implement mutually agreed upon improvements necessary to
36 accommodate pedestrian demand within the Caltrain station and JPB-owned right-of-way. The
37 City and County of San Francisco will be responsible for implementing improvements on City
38 streets and the public right-of-way surrounding the 4th and King Station. Because there are
39 multiple contributors to pedestrians to the station, including Caltrain, ~~MUNI~~ ~~Muni~~ Metro J and T
40 Lines, ~~MUNI~~ ~~Muni~~ bus lines, the future Central Subway, and other transit line and local land use
41 development, cost shall be shared on a fair-share basis as determined mutually by the JPB and
42 the City and County of San Francisco.

43 The performance standard guiding specific measures selection is as follows:

- 1 ● Pedestrian delay and illegal crossing activity shall be equivalent to or better than No Project
2 conditions, and peak hour pedestrian sidewalk densities on primary access routes to the
3 Fourth and King Station shall be less than or equal to projected No Project densities.

4 The following surface improvements to pedestrian facilities will address increased pedestrian
5 demand caused by the Proposed Project. These improvements will be studied in detail in the
6 pedestrian access study.

- 7 ● Widened curb waiting areas and added pedestrian bulbouts where high levels of demand
8 cannot be accommodated by existing facilities.
- 9 ● A pedestrian “scramble” at the intersection of 4th and Townsend Streets. A pedestrian
10 scramble is an intersection that is striped and designed to allow pedestrians to cross
11 diagonally in all directions during an all-way red signal at which all motor vehicles are
12 stopped.
- 13 ● Signalization improvements for both 4th and Townsend and 4th and King intersections.
14 While a pedestrian scramble is not likely to be feasible at the intersection of 4th Street and
15 King Street due intersection size, traffic volumes, and SMFTA at-grade transit operations, all-
16 way pedestrian signals at existing crosswalks are potentially feasible.
- 17 ● Widened crosswalks to increase pedestrian volumes and improve pedestrian sidewalk
18 widths on the immediate approaches to the intersections of 4th and Townsend and 4th and
19 King Streets, as appropriate and feasible.
- 20 ● Pedestrian safety countermeasures, such as pedestrian barriers and improved signage, as
21 necessary to address safety issues that are directly related to increased pedestrian volumes
22 at station access points.

23 The improvements identified in the access study shall be completed in a manner that does not
24 interfere with SMTA bus operations, SFMTA Metro or bicycle facilities in and around the station
25 area.

26 The JPB will also coordinate with the CPUC during the final design phase of the Project
27 concerning signal adjustments at 4th Street / King Street to ensure light rail vehicle operational
28 safety through this intersection.

29 This measure does not include any above- or below-ground pedestrian facilities, because the
30 Proposed Project’s impact can be address through feasible surface treatments described above.

31 **Bicycle Facilities**

Impact TRA-4a	Substantially disrupts existing bicycle facilities or interferes with planned bicycle facilities during construction
Level of Impact	Significant
Mitigation Measure	TRA-1a: Implement construction Traffic Control Plan
Level of Impact after Mitigation	Less than significant

32 Construction impact on bicycle facilities would be similar to the impact discussed in Impact TRA-3a.
33 The impact would be significant on bicycle facilities when temporary shoulder or road closures are
34 required on roadway segments, bridges, and at-grade crossings with bicycle lanes or high bicycle

1 traffic. Implementation of Mitigation Measure TRA-1a would reduce the temporary construction
2 impact to a less-than-significant level.

Impact TRA-4b	Substantially disrupts existing bicycle facilities or interferes with planned bicycle facilities; or conflicts or creates substantial inconsistencies with adopted bicycle system plans from Proposed Project operations
Level of Impact	Significant
Mitigation Measure	TRA-4b: Continue to improve bicycle facilities at Caltrain stations and partner with bike share programs where available following guidance in Caltrain’s Bicycle Access and Parking Plan
Level of Impact after Mitigation	Less than significant

3 The Proposed Project may increase future demand for bicycle facilities however, most plans in the
4 study area account for increased bicycle volumes through added bicycle infrastructure. The
5 Proposed Project would not change the alignment and does not impede any existing or planned
6 bicycle projects because the new improvements are limited to overhead infrastructure and the TPFs
7 (which do not affect bicycle facilities).

8 Caltrain would continue accommodating bicycles on board EMUs. Any unmet on-board demand for
9 bikes-on-board could be accommodated through the provision of increased bike parking at stations.
10 This would allow passengers to safely and securely park their bikes before boarding the train. If a
11 passenger is in need of a bike to egress from their destination station, they may also be able to use
12 Bay Area Bike Share, travel by another mode, or to leave a bike securely parked at their destination
13 station to facilitate their last-mile connection. Although long-range future plans for Bay Area Bike
14 Share are not yet available, the program would be expanded to include 1,000 bikes and 100 stations
15 in 2014 the near future (Cabanatuan 2013).

16 As explained above, Caltrain’s *Bicycle Access and Parking Plan* includes a long-term plan of
17 increasing bicycle parking supply for a variety of user needs, improving station access for bicyclists,
18 working with cities to improve station bike access, and considering other station-side concepts.

19 Mitigation Measure TRA-4b would require Caltrain to continue implementation of its current
20 planning improve bicycle facilities at Caltrain stations using the guidance provided in the *Bicycle
21 Access and Parking Plan*. Over time Caltrain will use these guidelines to meet potential increased
22 demand for such facilities. Thus, with mitigation, the Proposed Project would have a less-than-
23 significant impact on bicycle facilities.

24 **Mitigation Measure TRA-4b: Continue to improve bicycle facilities at Caltrain stations and**
25 **partner with bike share programs where available, using the guidance in the Caltrain’s**
26 **Bicycle Access and Parking Plan**

27 Caltrain will improve bicycle facilities at Caltrain stations where needed to accommodate
28 increased demand over time for such facilities including bike parking and bike lockers necessary
29 to safely and securely park bikes that are not taken on the train. Caltrain will work local and
30 regional bike share programs to provide opportunities for Caltrain riders to utilize bike share
31 facilities located at Caltrain stations (where feasible) or nearby (where not).

1 **Emergency Vehicle Access**

Impact TRA-5a	Results in inadequate emergency vehicle circulation and/or access during construction
Level of Impact	Significant
Mitigation Measure	TRA-1a: Implement construction Traffic Control Plan
Level of Impact after Mitigation	Less than significant

2 The Proposed Project could have a temporary impact on emergency vehicle access if an emergency
 3 occurs at the time when the Proposed Project construction requires temporary access or egress
 4 limitations. As described above, Mitigation Measure TRA-1a will require the preparation of a traffic
 5 control plan to help ensure continued emergency access to Caltrain ROW, at-grade crossings, and all
 6 nearby properties. Caltrain will coordinate with local public works department, local emergency
 7 providers, and Caltrans in the development of the traffic control plan to specifically address
 8 emergency response concerns. Thus, with mitigation, the Proposed Project’s impact related to
 9 emergency response or evacuation would be less than significant.

Impact TRA-5b	Results in inadequate emergency vehicle circulation and/or access from Proposed Project operations
Level of Impact	Less than significant

10 The existing roadways surrounding Caltrain stations in the study area enable emergency vehicle
 11 response to all areas. Emergency vehicles often identify and use multiple routes dependent upon
 12 time of day and traffic conditions. Peak period traffic congestion generally does not result in delay
 13 for emergency vehicles, which have ROW and often utilize multi-lane major arterials for access.
 14 Emergency vehicles are permitted to use transit-only lanes or other vehicle-restricted lanes if
 15 necessary.

16 Emergency vehicles traveling on streets that cross the at-grade crossings would experience some
 17 additional delay at the intersections that would exceed the acceptable levels of service and that
 18 would have longer gate-down times with Proposed Project implementation. Unlike at intersections
 19 with traffic signals where emergency vehicles can pass through the intersection at reduced speeds
 20 even when receiving a red signal indication, emergency vehicles would not be able to cross through
 21 the at-grade crossings when the railroad gates are down. This may cause some minor delay to
 22 emergency vehicles, though delays would not substantially differ from typical congestion that
 23 already occurs around at-grade crossing locations and would only affect the small number of
 24 emergency vehicles that are actually traveling through study intersections.

25 Despite these localized traffic delay impacts, emergency vehicle response times are a function of
 26 travel along the entire path from their base to the incident location. The Proposed Project overall
 27 would substantially reduce overall vehicle miles travelled in the Peninsula corridor by
 28 approximately 235,000 miles/day in 2020 (compared with the No Project scenario) which would
 29 substantially improve congestion on a broad general basis. Most of the VMT reductions would be
 30 during peak hours, which is especially important in reducing congestion. The broad-based
 31 congestion improvement is expected to more than offset the localized effects at individual at-grade
 32 crossings and near Caltrain stations and result in a net improvement (compared with the No Project
 33 Scenario) in the emergency response times.

1 As a result, impacts related to emergency vehicle access and emergency response times would be
2 considered less than significant.

3 **Station Vehicle Parking and Access**

Impact TRA-6a	Provide inadequate parking supply during construction
Level of Impact	Less than significant

4 Vehicle parking for construction vehicles, equipment, and workers is expected to be provided within
5 Caltrain ROW and staging and access areas identified in Chapter 2, *Project Description*. Therefore,
6 the parking supply on areas near the construction sites is not anticipated to be affected by the
7 construction. The parking impact is considered less than significant.

8 Implementation of Mitigation Measure TRA-1a would further reduce the impact.

Impact TRA-6b	Does not meet Caltrain’s <i>Comprehensive Access Program Policy Statement</i> or <i>Bicycle Access and Parking Plan</i> or would result in the construction of off-site parking facilities that would have secondary physical impacts on the environment from Proposed Project operations
Level of Impact before Mitigation	Less than significant

9 The Proposed Project would not interfere with the implementation and completion of the
10 *Comprehensive Access Program Policy Statement* or the *Bicycle Access and Parking Plan*. The
11 Proposed Project would increase both vehicular traffic around Caltrain stations but locations with
12 high vehicle volumes are signalized and allow pedestrians to cross safely. No additional new at-
13 grade crossings are planned with the Proposed Project and the implementation of CBOSS PTC
14 further improves safety.

15 The remainder of this section concerns station parking facilities.

16 Parking is currently provided by Caltrain at most existing stations with the exception of the San
17 Francisco 4th and King and the 22nd Street Stations. Most stations have supplemental parking
18 options including on-street parking and non-Caltrain parking lots. System-wide, most Caltrain lots
19 reach capacity prior to off-site lots and on-street spots; therefore, parking demand analysis for
20 future scenarios take into account the capacity at Caltrain lots and the capacity from on-street
21 parking and non-Caltrain lots within 0.25 miles of the Caltrain station.

22 Modeling of potential parking demand was completed for informational purposes based on
23 behavioral forecasts (see Appendix D, *Transportation Analysis*). Actual parking demand will
24 fluctuate based on day and month and based on people’s changing mode of access to Caltrain. The
25 parking supply and demand forecasted for 2020 is shown in Table 3.14-20.

26 The parking demand is forecasted to increase by 2020 at most stations regardless of the Proposed
27 Project. This increase is due to increased ridership and changes in future modes of access. Although
28 existing on street and non-Caltrain lot parking would accommodate some excess demand, there are
29 still stations that exceed the supply of on-street parking, non-Caltrain and Caltrain lots. These
30 stations include 4th and King, 22nd Street, South San Francisco, Hillsdale, Mountain View,
31 Sunnysvale, and Tamien in the 2020 scenario. At most stations where impacts occur under Project
32 scenarios they also occur in No Project scenarios, though to a lesser extent.

33

1 **Table 3.14-20. Excess Weekday Parking Demand Beyond Capacity of Caltrain Lots and On-Street**
2 **Parking**

Station	2020 No Project	2020 Project
4th and King	35	124
22nd Street	0	18
Bayshore	0	0
South San Francisco	0	14
San Bruno	0	0
Millbrae	0 ^a	0 ^a
Broadway	No data	0
Burlingame	0	0
San Mateo	0	0
Hayward Park	0	0
Hillsdale	0	33 ^b
Belmont	0	0
San Carlos	0	0
Redwood City	0	0
Atherton	-	0
Menlo Park	0	0
Palo Alto	0	0
California Avenue	0	0
San Antonio	0	0
Mountain View	0	136
Sunnyvale	189	447 ^c
Lawrence	0	0
Santa Clara	0	0
San Jose Diridon	0	0
Tamien	0	455
Total Excess Demand	224	1,227

Source: Appendix D, *Transportation Analysis*

^a Includes use of shared parking with BART.

^b Includes potential loss of 10 spaces with PS4 Option 1.

^c Includes potential loss of 10 spaces with PS6 Option 2.

3
4 Caltrain’s 2010 *Comprehensive Access Program Policy Statement*, emphasizes station access by
5 walking, transit, and bicycling over automobile access at most stations. The policy targets different
6 access strategies at different stations based on the station characteristics and access opportunities.
7 For example, the San Francisco 4th and King Station is a transit center where the access priority for
8 autos is the lowest priority after transit, walking and bicycles. At intermodal connectivity and
9 neighborhood circulator stations, auto access is not a priority. At auto-oriented stations, auto access
10 is the primary priority access mode followed by biking.

11 Stations were categorized in consultation with Dr. Rick Wilson from Cal Poly-Pomona. The station
12 categorization is not a formal part of the policy. Transit center stations include San Francisco 4th and
13 King, Palo Alto, Mountain View, and San Jose Diridon. Intermodal connectivity stations include
14 Redwood City, Millbrae, Hillsdale, Sunnyvale, San Mateo, and Menlo Park. Neighborhood circulator
15 stations include San Carlos, California Avenue, Burlingame, San Antonio, San Bruno and Belmont.
16 Although vehicle access is not a priority at these stations, vehicles are still a mode of access
17 considered by Caltrain, but at a lower priority than other modes.

1 Since some of the parking deficits identified above are at stations where providing automobile
2 access is not a priority, provision of substantial additional parking facilities at these stations would
3 conflict with Caltrain's *Comprehensive Access Program Policy Statement*. Where parking deficits are
4 at auto-oriented stations, provision of additional auto parking would be a priority, where feasible
5 and where funding is available The *Comprehensive Access Program Policy Statement* is implemented
6 by Caltrain in cooperation with local jurisdictions as part of Caltrain's long-term planning and
7 capital improvement program; however access improvements are implemented on a funding
8 available basis. Caltrain also works with local jurisdictions, other transit agencies, and local, state
9 and federal funding partners to fund improvements to access to Caltrain stations via alternatives to
10 automobiles including transit connections, bicycle and walking. Where future investments in these
11 access modes are realized, they will help to reduce some of the excess parking demand. Caltrain is
12 also working with many local jurisdictions concerning transit-oriented developments including
13 exploring shared parking opportunities where appropriate. However, despite these efforts, given the
14 funding limitations, priorities and long-term nature of Caltrain's implementation of its
15 *Comprehensive Access Program Policy Statement*, it is likely that not all of the parking deficits will be
16 addressed when the Proposed Project is in operation.

17 A parking deficit in and of itself, or the need to find a parking space off-site, while inconvenient is not
18 inherently a significant physical impact on the environment. Some station users unaware of the
19 parking deficits may circle⁹ but experienced station users will modify their behavior to take into
20 account the parking deficits and take alternative actions. Those actions may include arriving earlier,
21 using other nearby stations with available parking¹⁰, using the kiss and ride, using parking areas
22 further from the station, or accessing the station via other modes such as transit, biking or walking.

23 At the extreme, lack of vehicle parking could result in some riders deciding to use an alternative
24 transit system, carpool, or drive to their destination alone. This could result in lower Caltrain
25 ridership than estimated in this EIR. As an unrealistic worst-case example, if the system deficit of
26 approximately 1,000 spaces in excess of the Proposed Project were to mean 1,000 less Caltrain
27 riders, then 2020 ridership would be lower by 2 percent than predicted overall for 2020. However,
28 given that the Proposed Project would still result in substantial ridership increases (approximately
29 11,000 in 2020 compared with the No Project conditions) even in this worst-case situation, the
30 environmental consequences would be less than significant because the Proposed Project's benefits
31 to regional traffic, noise, air quality, and greenhouse gases would still be substantial (though slightly
32 smaller). In this scenario, the localized traffic impacts around the stations with parking deficits
33 would be slightly better than with full ridership.

34 The other potential impact of a parking deficit in and around Caltrain stations would be potential
35 increased demand for additional off-site parking facilities, the construction of which might result in
36 other secondary environmental impacts. However, as described above, Caltrain expects that the
37 dominant response to parking deficits will be behavioral change on the part of the commuting
38 public.

39 Thus, while the Proposed Project may result in a parking deficit at some stations, even with
40 implementation of its access program, as described above this is not considered to result in a

⁹ While circling vehicles may result in additional vehicle emissions, traffic and traffic noise, additional circling is not likely result in substantial additional criteria pollutant emissions, traffic, or noise around Caltrain stations above the thresholds used in this EIR.

¹⁰ For example, users of the Hillsdale Station could utilize the nearby Hayward Park and Belmont Stations, which are forecasted to have a parking surplus in 2020.

1 significant environmental impact. Thus the Proposed Project would not result in a significant
 2 physical impact to the environment related to air quality, noise, traffic or greenhouse gas emissions
 3 or the secondary impacts of construction of parking facilities due to the potential parking deficits
 4 that may occur.

5 **Freight Rail Service**

Impact TRA-7a	Results in a change in freight rail service such that resultant diversions to truck or other freight modes would result in significant secondary impacts during construction
Level of Impact	Significant
Mitigation Measure	TRA-2a: Implement construction railway disruption control plan
Level of Impact after Mitigation	Less than significant

6 As described above under Impact TRA-2a, installation of OCS poles and wires would require the use
 7 of on-track equipment in many locations. Work could be accomplished during the nighttime using
 8 single-track access in many cases; however, some portions of the work would likely require some
 9 multiple track shutdowns at night which could result in temporary suspension of freight service in
 10 constrained areas.

11 Implementation of Mitigation Measure TRA-2a would reduce the temporary construction impact on
 12 freight service disruption to a less-than-significant level by minimizing the duration of potential
 13 disruption to service during construction.

Impact TRA-7b	Results in a change in freight rail service such that resultant diversions to truck or other freight modes would result in significant secondary impacts during operations
Level of Impact	Less than significant

14 The Proposed Project could affect existing freight service in two ways: 1) through time constraints
 15 due to the requirements for temporal separation between proposed EMUs and freight trains in the
 16 FRA waiver; and 2) through potential height restrictions due to OCS installation.

17 As discussed in Chapter 2, the Proposed Project presumes that temporal separation will not be
 18 required and thus substantial changes to freight operational windows will not be necessary. Thus,
 19 this analysis focused on potential constraints on freight heights.

20 Potential effects related to electromagnetic interference from the OCS to freight signaling equipment
 21 is discussed separately in Section 3.5.

22 Regarding the Trackage Rights Agreement (TRA) between the JPB and Union Pacific, resolution of
 23 potential TRA issues is a contractual matter between the parties and would not result in significant
 24 physical impacts to the environment and thus are not a concern under CEQA as explained further
 25 below:

- 26 • The TRA requires provision of one daytime 30-minute freight window between 10 a.m. and 3
 27 p.m., provided the freight train operates at commuter passenger train speeds. The Proposed
 28 Project would not eliminate the ability to provide such a window.
- 29 • As established by the TRA, Union Pacific owns MT-1 south of Santa Clara. The Proposed Project
 30 will not electrify this portion of MT-1 and thus no conflict would occur.

- 1 • The Proposed Project is a commuter passenger rail project, not intercity rail, and the JPB owns
2 the commuter passenger rail rights.
- 3 • The TRA requires provision of certain vertical clearances at constrained tunnels, bridges, and
4 overpasses. As indicated in the analysis of this issue below, the project would not provide the
5 TRA clearance heights at some locations with the OCS. As discussed below, the lack of TRA
6 clearance heights is not expected to result in a significant physical impact on freight due to
7 diversion of freight to other modes, as compared to existing conditions.
- 8 • The JPB anticipates engaging in good faith negotiations with Union Pacific regarding the vertical
9 clearance issue. Because the TRA anticipates changing passenger service upgrades, JPB
10 negotiations with Union Pacific will likely resolve the vertical clearance issue by amending the
11 TRA. As a result, the EIR project description is adequate under CEQA as it describes a project
12 that can be legally built, taking into account the TRA requirements and amendment provisions.
13 Thus, it is not reasonably foreseeable that the Proposed Project will require additional
14 construction in order to provide for TRA-mandated clearances.¹¹

15 **Cumulative Impacts on Freight Service due to Temporal Separation Requirements**

16 Caltrain has been issued a waiver by FRA to allow the operation of the light-weight EMUs on the
17 same system as heavy freight trains. However, the FRA waiver requires a temporal separation
18 between the two different types of vehicles. It should be noted that the FRA is currently in a rule-
19 making process for properties that want to operate “Alternative Compliant Vehicles” which is
20 relevant to the EMUs in the Proposed Project. It is Caltrain’s understanding that when the
21 rulemaking is in place, the FRA waiver and the temporal separation requirement may no longer be
22 necessary.

23 Given that the rulemaking is not yet in place, for the purpose of this EIR, temporal separation is
24 assumed as described in the current FRA waiver. Based on the waiver, the Proposed Project would
25 result in restriction of freight to midnight to 5 a.m. (compared with 8 p.m. to 5 a.m. at present) along
26 the portion of the Caltrain corridor north of Santa Clara (north of CP Coast)¹².

27 At present, approximately three round-trip trains operate in this part of the Caltrain corridor. A
28 smaller operational window is more likely to affect the longer freight moves. The South City Local
29 already operates over a 2-night window due to equipment constraints and, thus, is not likely to be
30 significantly affected by the constrained operational window. The more lengthy moves, particularly
31 from South San Francisco to San Jose, would be more susceptible to time issues. If these longer
32 freight round trips could not be completed in a single night using a single train consist, then trips
33 may need to be staggered over several nights, as is done on the South City Local at present.
34 Alternatively, additional trains operating in each direction (one-way transit per night) or lengthier
35 trains could be employed in order to maintain the same level of service as a round-trip that could
36 otherwise be completed in the same night.

¹¹ Failing agreement between Union Pacific and the JPB on the TRA issues, the JPB has the legal right to seek abandonment of freight rights under the TRA without Union Pacific objection or opposition. Caltrain is not proposing to seek abandonment at this time as it presumes that this issue can be negotiated in good faith between the parties to the TRA. As discussed in the analysis above, freight operations can continue and be compatible with the Proposed Project using the project-proposed vertical heights. As such, the EIR does not analyze potential abandonment of freight operations along the Caltrain Corridor.

¹² Freight service hours are not limited by the TRA on the UPRR-owned dedicated freight MT-1 track between CP Coast and CP Lick (Santa Clara to south of Tamien Station); operational hours would not be limited on this track.

1 While inconvenient and requiring change in freight operational practices north of Santa Clara, the
2 compression of freight service hours to midnight to 5 a.m. would not be expected to result in a
3 diversion of freight hauling from freight trains to trucks or other modes and, thus, would not result
4 in any potential secondary impacts related to air quality, greenhouse gas emissions, noise, or traffic
5 congestion.¹³

6 Section 4.1, *Cumulative Impacts*, discusses the potential impacts that may occur in the future with
7 cumulative passenger and freight rail service relative to the restriction in operational windows.


8 ~~Impacts on Freight Service due to Changes in Vertical Clearances~~

9 Installation of the OCS would lower the existing vertical clearance at the San Francisco tunnels and
10 at bridges and other crossings and structures over the Caltrain ROW. This could affect the ability of
11 existing freight to continue operations if the vertical clearance is lowered below the highest height
12 of current freight vehicles using the Caltrain ROW. Figure 3.14-8 illustrates clearances with OCS
13 installation at a prototypical tunnel and overhead structure location. Table 3.14-21 shows the
14 existing clearances and the future clearances with the project.

15 As discussed in Chapter 2, *Project Description*, the Proposed Project would include minor
16 modifications at several of the San Francisco tunnels and at certain undercrossings to ensure that
17 adequate vertical clearance is provided to accommodate existing Caltrain trains, the proposed
18 EMUS, and the existing freight train heights. Consequently, existing freight vehicles that are
19 currently used on the Caltrain corridor would not be restricted by lowered overhead clearances.
20 Thus, no impact on existing freight service is expected due to the change in overhead clearances.

21 Section 4.1, *Cumulative Impacts*, discusses the potential impacts that may occur in the future if
22 freight operators decide to use railcars that are higher than existing railcars now used on the
23 corridor. This potential impact is disclosed as a potential cumulative impact because it does not
24 involve the freight railcars that have been used in the last 8 years and, thus, would not be an
25 ~~baseline~~ environmental impact as compared to the existing baseline.

¹³ It should be noted that this is common practice on other light density freight lines shared with transit such as the RiverLine in New Jersey and some of the San Diego Trolley system.

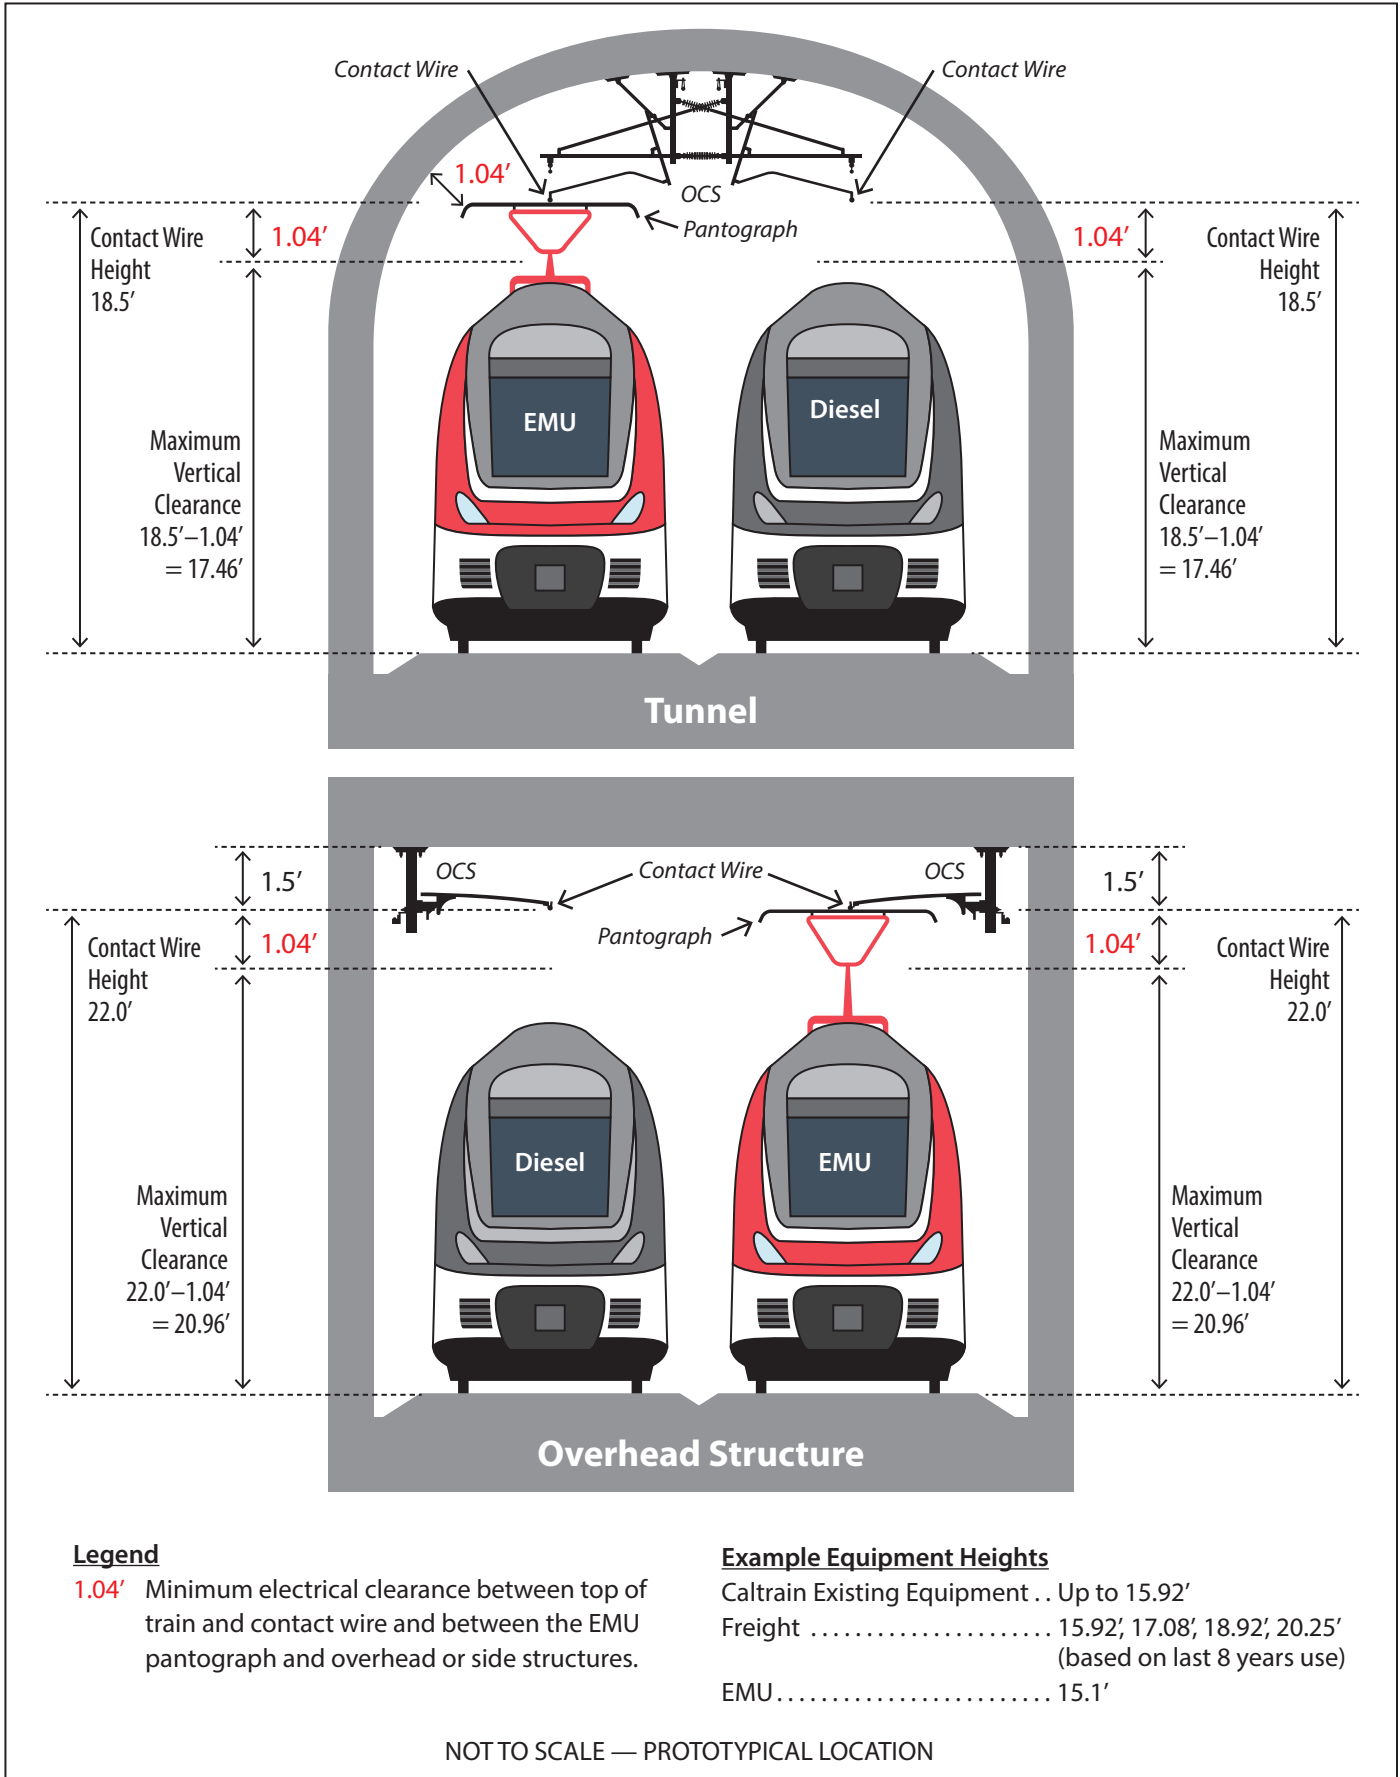

Graphics ... 0060612 (2-07-2014)

Figure 3.14-8
Vertical Clearances with OCS System in Potentially Constrained Areas
 Peninsula Corridor Electrification Project

1 **Table 3.14-21. Existing Effective Vertical Clearances and With the Proposed Project OCS**

Milepost	Bridge	TRA Clearance (CL)	Existing Effective ¹ / Historic Clearance ^{3,4}		Effective Vertical Clearance with OCS ²		Project Impact (Y/N) ⁵
			Effective Clearance Over CL	Historic Freight Plate Height / Plate from past 8 years ³	Effective Clearance Over CL	Allowable Plate Height / Plate ³	
0.52	Signal Cantilever	N/A	22.48 (MT-1) 23.70 (MT-2)	15.50 / C	20.44 (MT-1) 21.66 (MT-2)	15.50 / C	N
0.70	Signal Cantilever	N/A	27.59 (MT-3) 28.07 (Lead Track)	15.50 / C	25.55 (MT-3) 26.03 (Lead Track)	15.50 / C	N
0.88	Signal Cantilever	N/A	25.45 (MT-1) 25.59 (MT-2)	15.50 / C	23.41 (MT-1) 23.55 (MT-2)	15.50 / C	N
1.10	Signal Bridge	N/A	25.45 (MT-1) 25.59 (MT-2)	15.50 / C	22.74 (MT-1) 22.64 (MT-2)	15.50 / C	N
1.20	Signal Bridge	N/A	23.12 (MT-1) 23.12 (MT-2)	15.50 / C	21.08 (MT-1) 21.08 (MT-2)	15.50 / C	N
1.29	Mariposa	21.25	20.51	15.50 / C	18.47	15.50 / C	N
1.33	Tunnel 1	21.92 (MT-1) 21.50 (MT-2)	20.80 (MT-1) 20.60 (MT-2)	15.50 / C	17.00 (MT-1) 17.00 (MT-2)	15.50 / C ⁶	N
1.72	22 nd St.	20.50	19.92	15.50 / C	16.84	15.50 / C	N
1.87	Signal Cantilever	N/A	24.81 (MT-1) 24.89 (MT-2)	15.50 / C	22.77 (MT-1) 22.85 (MT-2)	15.50 / C	N
1.90	23 rd St.	21.00	20.25	15.50 / C	17.17	15.50 / C	N
1.93	Tunnel 2	21.74 (MT-1) 21.33 (MT-2)	20.70 (MT-1) 20.60 (MT-2)	15.50 / C	17.00 (MT-1) 17.00 (MT-2)	15.50 / C ⁶	N
3.13	Oakdale	20.50	22.68	17.08 / F	20.64	17.08 / F	N
3.19	Tunnel 3	21.33 (MT-1) 21.17 (MT-2)	20.80 (MT-1) 20.80 (MT-2)	17.08 / F	18.00 (MT-1) 18.00 (MT-2)	17.08 / F ⁶	N
4.15	Paul Ave	19.83	19.83	17.08 / F	17.79	17.08 / F	N
4.27	Tunnel 4	21.08 (MT-1) 21.08 (MT-2)	20.20 (MT-1) 20.10 (MT-2)	17.08 / F	18.00 (MT-1) 18.00 (MT-2)	17.08 / F ⁶	N

Milepost	Bridge	TRA Clearance (CL)	Existing Effective ¹ / Historic Clearance ^{3,4}		Effective Vertical Clearance with OCS ²		Project Impact (Y/N) ⁵
			Effective Clearance Over CL	Historic Freight Plate Height / Plate from past 8 years ³	Effective Clearance Over CL	Allowable Plate Height / Plate ³	
5.10	Signal Bridge	N/A	23.17 (MT-1) 23.08 (MT-2) 23.33 (MT-3) 23.24 (MT-4) 23.60 (Lead Track)	18.92 / > F	21.13 (MT-1) 21.04 (MT-2) 21.29 (MT-3) 21.20 (MT-4) 21.56 (Lead Track)	18.92 / > F	N
5.48	Signal Bridge	N/A	28.18 (MT-1) 28.36 (MT-2) 28.20 (MT-3) 28.52 (MT-4)	18.92 / > F	26.14 (MT-1) 26.32 (MT-2) 26.16 (MT-3) 26.48 (MT-4)	18.92 / > F	N
5.83	Signal Bridge	N/A	27.36 (MT-1) 27.42 (MT-2) 27.55 (MT-3) 27.57 (MT-4) 27.57 (Lead track)	18.92 / > F	25.32 (MT-1) 25.38 (MT-2) 25.51 (MT-3) 25.53 (MT-4) 25.53 (Lead Track)	18.92 / > F	N
6.29	Signal Bridge	N/A	27.68 (MT-1) 27.61 (MT-2) 27.90 (MT-3) 27.87 (MT-4) 28.06 (Lead track)	18.92 / > F	25.64 (MT-1) 25.57 (MT-2) 25.86 (MT-3) 25.83 (MT-4) 26.02 (Lead Track)	18.92 / > F	N
6.95	Signal Bridge	N/A	28.10 (MT-1) 28.03 (MT-2) 27.91 (MT-3) 28.01 (MT-4)	18.92 / > F	26.06 (MT-1) 25.99 (MT-2) 25.87 (MT-3) 25.97 (MT-4)	18.92 / > F	N
8.24	Signal Cantilever	N/A	28.09 (MT-1) 27.94 (MT-2)	18.92 / > F	26.05 (MT-1) 25.90 (MT-2)	18.92 / > F	N
8.60	Oyster Point Parkway	N/A	22.19	18.92 / > F	20.15	18.92 / > F	N
9.10	Signal Bridge	N/A	21.59 (MT-1) 21.64 (MT-2)	18.92 / > F	19.55 (MT-1) 19.60 (MT-2)	18.92 / > F	N

<u>Milepost</u>	<u>Bridge</u>	<u>TRA Clearance (CL)</u>	<u>Existing Effective¹/ Historic Clearance^{3,4}</u>		<u>Effective Vertical Clearance with OCS²</u>		<u>Project Impact (Y/N)⁵</u>
			<u>Effective Clearance Over CL</u>	<u>Historic Freight Plate Height / Plate from past 8 years³</u>	<u>Effective Clearance Over CL</u>	<u>Allowable Plate Height / Plate³</u>	
<u>13.71</u>	<u>Signal Bridge</u>	<u>N/A</u>	<u>29.15 (MT-1)</u> <u>29.10 (MT-2)</u> <u>29.02 (MT-3)</u>	<u>18.92 / > F</u>	<u>27.11 (MT-1)</u> <u>27.06 (MT-2)</u> <u>26.98 (MT-3)</u>	<u>18.92 / > F</u>	<u>N</u>
<u>14.14</u>	<u>Signal Bridge</u>	<u>N/A</u>	<u>28.32 (MT-1)</u> <u>28.40 (MT-2)</u> <u>28.20 (MT-3)</u>	<u>18.92 / > F</u>	<u>26.28 (MT-1)</u> <u>26.36 (MT-2)</u> <u>26.16 (MT-3)</u>	<u>18.92 / > F</u>	<u>N</u>
<u>26.20</u>	<u>Signal Bridge</u>	<u>N/A</u>	<u>28.08 (MT-1)</u> <u>28.06 (MT-2)</u> <u>28.09 (MT-3)</u>	<u>18.92 / > F</u>	<u>26.04 (MT-1)</u> <u>26.02 (MT-2)</u> <u>26.05 (MT-3)</u>	<u>18.92 / > F</u>	<u>N</u>
<u>26.35</u>	<u>Signal Cantilever</u>	<u>N/A</u>	<u>27.74 (MT-2)</u> <u>27.62 (MT-4)</u>	<u>18.92 / > F</u>	<u>25.70 (MT-2)</u> <u>25.58 (MT-4)</u>	<u>18.92 / > F</u>	<u>N</u>
<u>27.12</u>	<u>Signal Bridge</u>	<u>N/A</u>	<u>27.60 (MT-1)</u> <u>27.62 (MT-2)</u> <u>27.58 (MT-3)</u> <u>27.70 (MT-4)</u>	<u>18.92 / > F</u>	<u>25.56 (MT-1)</u> <u>25.58 (MT-2)</u> <u>25.54 (MT-3)</u> <u>25.66 (MT-4)</u>	<u>18.92 / > F</u>	<u>N</u>
<u>29.69</u>	<u>San Francisquito</u>	<u>21.75</u>	<u>21.05</u>	<u>18.92 / > F</u>	<u>19.11</u>	<u>18.92 / > F</u>	<u>N</u>
<u>34.00</u>	<u>San Antonio Ave.</u>	<u>N/A</u>	<u>22.14</u>	<u>18.92 / > F</u>	<u>19.62</u>	<u>18.92 / > F</u>	<u>N</u>
<u>36.50</u>	<u>Hwy 85</u>	<u>N/A</u>	<u>22.14</u>	<u>18.92 / > F</u>	<u>20.10</u>	<u>18.92 / > F</u>	<u>N</u>
<u>36.88</u>	<u>Whisman Rd.</u>	<u>N/A</u>	<u>22.47</u>	<u>18.92 / > F</u>	<u>20.43</u>	<u>20.25 / H</u>	<u>N</u>
<u>38.60</u>	<u>Mathilda Ae.</u>	<u>N/A</u>	<u>22.37</u>	<u>18.92 / > F</u>	<u>20.33</u>	<u>20.25 / H</u>	<u>N</u>
<u>39.40</u>	<u>Pedestrian Overpass</u>	<u>N/A</u>	<u>21.85</u>	<u>18.92 / > F</u>	<u>19.81</u>	<u>18.92 / > F</u>	<u>N</u>
<u>39.46</u>	<u>Signal Bridge</u>	<u>N/A</u>	<u>27.86 (MT-1)</u> <u>27.75 (MT-2)</u> <u>27.93 (MT-3)</u> <u>27.71 (MT-4)</u>	<u>18.92 / > F</u>	<u>25.82 (MT-1)</u> <u>25.71 (MT-2)</u> <u>25.89 (MT-3)</u> <u>25.67 (MT-4)</u>	<u>20.25 / H</u>	<u>N</u>

Milepost	Bridge	TRA Clearance (CL)	Existing Effective ¹ / Historic Clearance ^{3,4}		Effective Vertical Clearance with OCS ²		Project Impact (Y/N) ⁵
			Effective Clearance Over CL	Historic Freight Plate Height / Plate from past 8 years ³	Effective Clearance Over CL	Allowable Plate Height / Plate ³	
40.14	Signal Bridge	N/A	29.28 (MT-1) 29.22 (MT-2) 29.38 (MT-3) 29.44 (MT-4)	18.92 / > F	27.24 (MT-1) 27.18 (MT-2) 27.34 (MT-3) 27.40 (MT-4)	20.25 / H	N
40.75	Lawrence Expressway	N/A	22.13	18.92 / > F	20.09	18.92 / > F	N
40.90	Signal Bridge	N/A	27.17 (MT-1) 27.15 (MT-2) 27.29 (MT-3) 27.24 (MT-4)	18.92 / > F	25.13 (MT-1) 25.11 (MT-2) 25.25 (MT-3) 25.20 (MT-4)	20.25 / H	N
41.51	Signal Bridge	N/A	27.82 (MT-1) 27.80 (MT-2) 27.81 (MT-3) 27.91 (MT-4)	18.92 / > F	25.78 (MT-1) 25.76 (MT-2) 25.77 (MT-3) 25.87 (MT-4)	20.25 / H	N
42.50	San Tomas Expressway	N/A	22.37	18.92 / > F	21.33	20.25 / H	N
43.65	Lafayette Pedestrian Overpass	N/A	22.25	18.92 / > F	20.21	18.92 / > F	N
45.90	I-880	N/A	22.46	20.25 / H	20.42	20.25 / H	N
46.15	Hedding Ave.	N/A	22.07	20.25 / H	20.25	20.25 / H ⁷	N
46.34	Signal Cantilever	N/A	24.06 (MT-2)	20.25 / H	22.02 (MT-2)	20.25 / H	N
46.50	Signal Cantilever	N/A	27.23 (MT-2) 27.50 (MT-3)	20.25 / H	25.19 (MT-2) 25.46 (MT-3)	20.25 / H	N
47.0	Cahill Station	15.67	Structure does not exist	20.25 / H	N/A	N/A	N
47.05	Signal Bridge	N/A	27.88 (MT-2) 28.05 (MT-3) 28.13 (Lead Track)	20.25 / H	25.84 (MT-2) 26.01 (MT-3) 26.09 (Lead Track)	20.25 / H	N

Milepost	Bridge	TRA Clearance (CL)	Existing Effective ¹ / Historic Clearance ^{3,4}		Effective Vertical Clearance with OCS ²		Project Impact (Y/N) ⁵
			Effective Clearance Over CL	Historic Freight Plate Height / Plate from past 8 years ³	Effective Clearance Over CL	Allowable Plate Height / Plate ³	
47.30	Signal Bridge	N/A	23.56 (MT-2) 23.44 (MT-3)	20.25 / H	21.52 (MT-2) 21.40 (MT-3)	20.25 / H	N
47.89	San Carlos Ave.	22.17	21.53	20.25 / H	20.25	20.25 / H ⁷	N
49.13	Signal Cantilever	N/A	23.08 (MT-2)	20.25 / H	21.04 (MT-2)	20.25 / H	N
50.55	Signal Cantilever	N/A	27.76 (MT-2)	20.25 / H	25.72 (MT-2)	20.25 / H	N
50.59	Curtner Ave.	N/A	21.99	20.25 / H	20.25	20.25 / H ⁷	N
50.65	Signal Cantilever	N/A	27.72 (MT-2)	20.25 / H	25.68 (MT-2)	20.25 / H	N
51.08	Private Overpass	N/A	21.96	20.25 / H	20.25	20.25 / H ⁷	N
51.64	Signal Cantilever	N/A	25.24 (MT-2)	20.25 / H	23.20 (MT-2)	20.25 / H	N

General Notes:

- ¹ Existing Effective Clearance is defined as the existing clearance measured over the centerline of the track minus 6” of dynamic envelope per Caltrain Standards.
- ² Effective Vertical Clearance with OCS is defined as existing clearance measured over the centerline of the track minus 1.5’ of OCS structure depth and 1.04’ of electrical clearance envelope. Effective Vertical Clearance with OCS in the Tunnels includes design solution for notching / lowering that will enable the OCS to be installed to maintain clearance heights of 17’ in Tunnels 1 and 2 and 18’ in Tunnels 3 and 4.
- ³ Plate Heights are as defined by AAR: Plate C = 15.50’; Plate F = 17.08’; Plate H = 20.25’.
- ⁴ From Tunnel 2 going north, the tallest historic vehicle (last 8 years) is Caltrain’s Bombardier Vehicle at 15.92’. The tallest freight vehicle (last 8 years) is a Plate C at 15.50’. Between CP Tunnel (MP 5.10) and CP Coast (MP 43.4), the tallest historical freight load (last 8 years) is 18.92’, which is not directly correlated to an AAR Plate Size. Thus the designation for that height is “>F”. South of CP Coast, the tallest historical freight load (last 8 years) is 20.25’, which is AAR Plate “H”.
- ⁵ Analysis assumes that MT-1 South of CP Coast at MP 43.4 is not electrified and thus there’s no change to existing MT-1 clearance or impact to Freight traffic South of CP Coast.
- ⁶ Includes tunnel notching and track lowering as part of Proposed Project.
- ⁷ Includes track lowering as part of Proposed Project.

